

# DIGITUS HP-compatible SFP+ 10G SM 1310nm 10Km with DDM

DN-81201-01  
 EAN 4016032370031



**HP-compatible SFP+ 10G SM 1310nm 10Km with DDM LC connector, Power dissipation < 1W**

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Whether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

**The plug and play fiber connection**

- Mini GBIC SFP (Small Form Factor Pluggable) module
- Supports DDM (Digital Diagnostic Monitoring)
- High quality and excellent reliability
- 10 Gbps Maximum Data Rate
- Compliant to IEEE802.3ae 10 Gigabit Standard
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant
- Hot pluggable


- Connector: 1x LC Duplex
- Wavelength: 1310nm
- Transmission Power: Minimum -8 dBm, Maximum -0,5 dBm
- Sensitivity Receiving Power: Minimum -12.5 dBm
- For a distance of up to 10,0km
- Safe fast-locking mechanism
- Operating temperature: 0 °C ~ 70 °C
- HP compatible
- HP-Aruba compatible
- Mod: Jednomodni
- Priključak: LC
- Udaljenost (km): 10
- Valna duljina: 1310 nm
- DDM podrška: Da
- Kompatibilnost proizvođača: HP
- Način emitiranja: Jednosmjerno
- Ethernet brzina: 10 gigabita

**Package contents**

- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	2.00	41.00	26.00	16.00	17.06
Packaging Unit Inside	1	0.10	3.00	11.50	9.00	310.50
Packaging Unit Single	1	0.10	3.00	11.50	9.00	310.50
Net single without Packaging	0	0.03	5.50	1.20	0.80	5.28

More images:

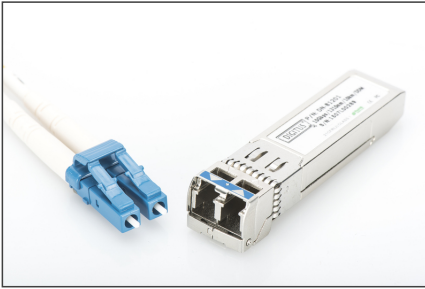

SFP Modules							
Part Number	Data Rate	Speed	Distance	Connector	Wavelength	Operating Temperature	Industrial Model
<b>Fast Ethernet</b>							
DS-4910	4000000000	1.0 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4914	4000000000	1.0 Gbps	25 km	LC Duplex Small Form-factor Pluggable	1550nm	0 to 70 °C	✓
DS-4918	4000000000	1.0 Gbps	25 km	LC Duplex Small Form-factor Pluggable	1550nm	0 to 70 °C	✓
<b>10 Gigabit</b>							
DS-4920	40000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4924	40000000000	10 Gbps	25 km	LC Duplex Small Form-factor Pluggable	1550nm	0 to 70 °C	✓
DS-4928	40000000000	10 Gbps	25 km	LC Duplex Small Form-factor Pluggable	1550nm	0 to 70 °C	✓
DS-4932	40000000000	10 Gbps	25 km	LC Duplex Small Form-factor Pluggable	1550nm	0 to 70 °C	✓
DS-4936	40000000000	10 Gbps	25 km	LC Duplex Small Form-factor Pluggable	1550nm	0 to 70 °C	✓
<b>100 Gbps</b>							
DS-4940	400000000000	100 Gbps	10 km	LC MPO Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4944	400000000000	100 Gbps	10 km	LC MPO Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
<b>Fast Ethernet</b>							
DS-4910	4000000000	1.0 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	-40 to 85 °C	✓
DS-4914	4000000000	1.0 Gbps	25 km	LC Duplex Small Form-factor Pluggable	1550nm	-40 to 85 °C	✓
DS-4918	4000000000	1.0 Gbps	25 km	LC Duplex Small Form-factor Pluggable	1550nm	-40 to 85 °C	✓
DS-4920	40000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	-40 to 85 °C	✓
DS-4924	40000000000	10 Gbps	25 km	LC Duplex Small Form-factor Pluggable	1550nm	-40 to 85 °C	✓
DS-4928	40000000000	10 Gbps	25 km	LC Duplex Small Form-factor Pluggable	1550nm	-40 to 85 °C	✓
DS-4932	40000000000	10 Gbps	25 km	LC Duplex Small Form-factor Pluggable	1550nm	-40 to 85 °C	✓
DS-4936	40000000000	10 Gbps	25 km	LC Duplex Small Form-factor Pluggable	1550nm	-40 to 85 °C	✓