


DIGITUS CAT 8.2 S/FTP installation cable, 500 m, Simplex, Dca-s2,d1,a1

DK-1843-VH-5
EAN 4016032380542

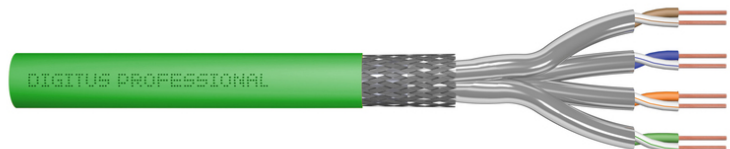

CAT 8.2 S-FTP installation cable, 2000 MHz, AWG 22/1 Dca, 500 m, drum, simplex, grün

The Digitus Cat 8.2 S/FTP installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-12-1, DIN EN 50173, IEC 60332-3-24. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE. The shielding structure is composed of single shielded pairs with a tinned copper braid, which ensures excellent shielding and electrical values.

Future-oriented standards and high-end quality for your network

- Physical properties:
- Conductor: Bare copper wire, AWG 22/1
- System(s) of assessment and verification of constancy of performance: System 3
- Insulation: SFS-PE (foamed polyethylene jacket)
- Total number of insulated conductors: 8, twisted into 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: Aluminum-laminated polyester film, covers 100%
- Overall shielding: Tinned copper braiding
- Outer sheath: Dca-s2,d1,a1 according to EN 50575
- Outer sheath thickness (nominal): 0.55 mm nominal
- Outer sheath color: Green
- Mechanical properties:
- Strain relief: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Transport and storage temperature range: -20 °C to +75 °C


- Operating temperature range: -20 °C to +60 °C
- Installation temperature range: 0 °C to +50 °C
- Outer diameter simplex (nominal): 7.9 mm nominal (Dca)
- Weight (kg/km): 65 kg/km
- Electrical properties:
- Impedance: 100±15Ohm @ 1 - 2000MHz
- Capacitance: 99 pF/30m nominal @ 1 KHz
- Capacitance unbalance (pair-earth): 99pF/30m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC resistance: 2.40hm/30m max. (4% max. unbalanced resistance)
- Loop resistance: 5.6 Ohm/24m max. (3% max. unbalanced resistance)
- Operating voltage: 72 Vdc max.
- Coupling attenuation: CA-Type 1
- Phase delay: 171 nS/30 m max.
- Time delay: 13.5 nS/130 m max.
- Separation class: "d" according to EN 50174-2
- NVP: 79%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 8.2
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Dca
- Length: 500 m
- Color: green
- Jacket: LSOH
- Structure: 4 x 2 AWG 22/1, solid twisted pair

Package contents

- CAT 8.2 S/FTP installation cable on drum, 500 m, Simplex, Dca




Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	30.00	34.00	39.50	39.50	53,048.50
Packaging Unit Inside	1	30.00	34.00	39.50	39.50	53,048.50
Packaging Unit Single	1	30.00	34.00	39.50	39.50	53,048.50
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

More images:

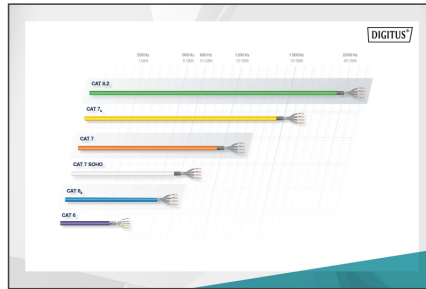

AWG	20	22	24	26	28	30	32
1	1	2	3	4	5	6	7
2	2	3	4	5	6	7	8
3	3	4	5	6	7	8	9
4	4	5	6	7	8	9	10
5	5	6	7	8	9	10	11
6	6	7	8	9	10	11	12
7	7	8	9	10	11	12	13
8	8	9	10	11	12	13	14
9	9	10	11	12	13	14	15
10	10	11	12	13	14	15	16
11	11	12	13	14	15	16	17
12	12	13	14	15	16	17	18
13	13	14	15	16	17	18	19
14	14	15	16	17	18	19	20
15	15	16	17	18	19	20	21
16	16	17	18	19	20	21	22
17	17	18	19	20	21	22	23
18	18	19	20	21	22	23	24
19	19	20	21	22	23	24	25
20	20	21	22	23	24	25	26
21	21	22	23	24	25	26	27
22	22	23	24	25	26	27	28
23	23	24	25	26	27	28	29
24	24	25	26	27	28	29	30
25	25	26	27	28	29	30	31
26	26	27	28	29	30	31	32
27	27	28	29	30	31	32	33
28	28	29	30	31	32	33	34
29	29	30	31	32	33	34	35
30	30	31	32	33	34	35	36
31	31	32	33	34	35	36	37
32	32	33	34	35	36	37	38
33	33	34	35	36	37	38	39
34	34	35	36	37	38	39	40
35	35	36	37	38	39	40	41
36	36	37	38	39	40	41	42
37	37	38	39	40	41	42	43
38	38	39	40	41	42	43	44
39	39	40	41	42	43	44	45
40	40	41	42	43	44	45	46
41	41	42	43	44	45	46	47
42	42	43	44	45	46	47	48
43	43	44	45	46	47	48	49
44	44	45	46	47	48	49	50
45	45	46	47	48	49	50	51
46	46	47	48	49	50	51	52
47	47	48	49	50	51	52	53
48	48	49	50	51	52	53	54
49	49	50	51	52	53	54	55
50	50	51	52	53	54	55	56
51	51	52	53	54	55	56	57
52	52	53	54	55	56	57	58
53	53	54	55	56	57	58	59
54	54	55	56	57	58	59	60
55	55	56	57	58	59	60	61
56	56	57	58	59	60	61	62
57	57	58	59	60	61	62	63
58	58	59	60	61	62	63	64
59	59	60	61	62	63	64	65
60	60	61	62	63	64	65	66
61	61	62	63	64	65	66	67
62	62	63	64	65	66	67	68
63	63	64	65	66	67	68	69
64	64	65	66	67	68	69	70
65	65	66	67	68	69	70	71
66	66	67	68	69	70	71	72
67	67	68	69	70	71	72	73
68	68	69	70	71	72	73	74
69	69	70	71	72	73	74	75
70	70	71	72	73	74	75	76
71	71	72	73	74	75	76	77
72	72	73	74	75	76	77	78
73	73	74	75	76	77	78	79
74	74	75	76	77	78	79	80
75	75	76	77	78	79	80	81
76	76	77	78	79	80	81	82
77	77	78	79	80	81	82	83
78	78	79	80	81	82	83	84
79	79	80	81	82	83	84	85
80	80	81	82	83	84	85	86
81	81	82	83	84	85	86	87
82	82	83	84	85	86	87	88
83	83	84	85	86	87	88	89
84	84	85	86	87	88	89	90
85	85	86	87	88	89	90	91
86	86	87	88	89	90	91	92
87	87	88	89	90	91	92	93
88	88	89	90	91	92	93	94
89	89	90	91	92	93	94	95
90	90	91	92	93	94	95	96
91	91	92	93	94	95	96	97
92	92	93	94	95	96	97	98
93	93	94	95	96	97	98	99
94	94	95	96	97	98	99	100

Produktbeschreibung Product Description	Physikalische Spezifikationen Physical Properties
Produktname CAT 8.2 S/FTP Installation Cable, 500m, Simplex, D _{ca} Teilenummer 1843-VH-S Hersteller DIGITUS Professional Material PVC Farbe Grün Abmessungen 12,5 x 12,5 x 12,5 mm Nettogewicht 1,5 kg Bruttogewicht 1,8 kg Verpackung 100m Spule Umweltbedingungen -20°C bis +60°C CE-Kennzeichnung CE	Leistungsgrenzen 2000 MHz, 40 Gbit Ethernet, CAT 8.2 Abmessungen 12,5 x 12,5 x 12,5 mm Nettogewicht 1,5 kg Bruttogewicht 1,8 kg Verpackung 100m Spule Umweltbedingungen -20°C bis +60°C CE-Kennzeichnung CE

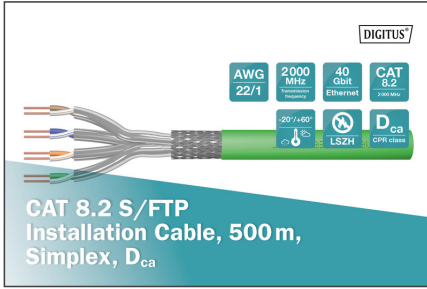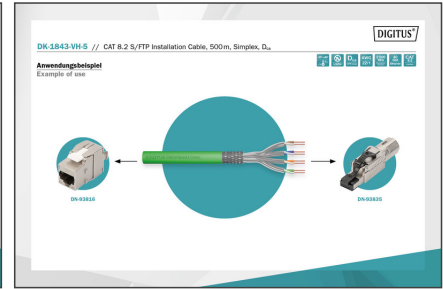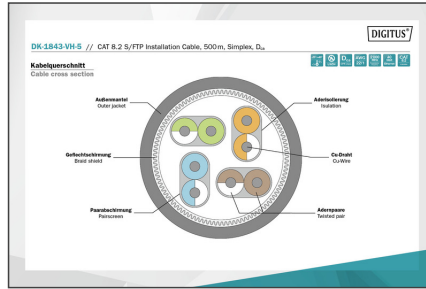

CE-Kennzeichnung	Produktbeschreibung	Leistungsgrenzen (MHz)	Abmessungen (mm)	Umweltbedingungen
B2ca	2000 MHz	1+	12,5 x 12,5 x 12,5	-20°C bis +60°C
C _{ca}	40 Gbit Ethernet	3	12,5 x 12,5 x 12,5	-20°C bis +60°C
D _{ca}	CAT 8.2	3	12,5 x 12,5 x 12,5	-20°C bis +60°C
E _{ca}	LSZH	3	12,5 x 12,5 x 12,5	-20°C bis +60°C



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com