


# DIGITUS CAT 8.2 S/FTP installation cable, 500 m, Simplex, Dca-s2,d1,a1

DK-1843-VH-5  
EAN 4016032380542

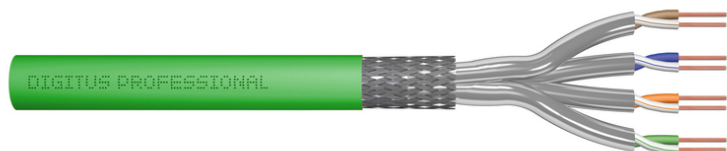

**CAT 8.2 S-FTP install. cable, 2000 MHz, AWG 22/1 Dca, 500 m, drum, simplex, grün**

The Digitus Cat 8.2 S/FTP installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-12-1, DIN EN 50173, IEC 60332-3-24. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE. The shielding structure is composed of single shielded pairs with a tinned copper braid, which ensures excellent shielding and electrical values.

**Future-oriented standards and high-end quality for your network**

- Physical properties:
- Conductor: Bare copper wire, AWG 22/1
- System(s) of assessment and verification of constancy of performance: System 3
- Insulation: SFS-PE (foamed polyethylene jacket)
- Total number of insulated conductors: 8, twisted into 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: Aluminum-laminated polyester film, covers 100%
- Overall shielding: Tinned copper braiding
- Outer sheath: Dca-s2,d1,a1 according to EN 50575
- Outer sheath thickness (nominal): 0.55 mm nominal
- Outer sheath color: Green
- Mechanical properties:
- Strain relief: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Transport and storage temperature range: -20 °C to +75 °C


- Operating temperature range: -20 °C to +60 °C
- Installation temperature range: 0 °C to +50 °C
- Outer diameter simplex (nominal): 7.9 mm nominal (Dca)
- Weight (kg/km): 65 kg/km
- Electrical properties:
- Impedance: 100±15Ohm @ 1 - 2000MHz
- Capacitance: 99 pF/30m nominal @ 1 KHz
- Capacitance unbalance (pair-earth): 99pF/30m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC resistance: 2.40hm/30m max. (4% max. unbalanced resistance)
- Loop resistance: 5.6 Ohm/24m max. (3% max. unbalanced resistance)
- Operating voltage: 72 Vdc max.
- Coupling attenuation: CA-Type 1
- Phase delay: 171 nS/30 m max.
- Time delay: 13.5 nS/130 m max.
- Separation class: "d" according to EN 50174-2
- NVP: 79%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 8.2
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Dca
- Length: 500 m
- Color: green
- Jacket: LSOH
- Structure: 4 x 2 AWG 22/1, solid twisted pair

**Package contents**

- CAT 8.2 S/FTP installation cable on drum, 500 m, Simplex, Dca

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	30.00	34.00	39.50	39.50	53,048.50
Packaging Unit Inside	1	30.00	34.00	39.50	39.50	53,048.50
Packaging Unit Single	1	30.00	34.00	39.50	39.50	53,048.50
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

More images:


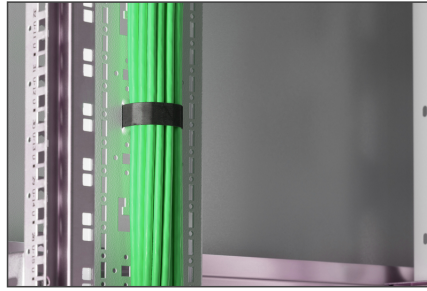


**Leistungsparameter Transmission Properties**

AWG	AWG	NEWT	PL-NEWT	AWG	PL-NEWT	PL
22	24	26	28	26	28	28
19	20	22	24	22	24	24
16	17	19	21	19	21	21
14	15	17	19	17	19	19
12	13	15	17	15	17	17
10	11	13	15	13	15	15
8	9	11	13	11	13	13
6	7	9	11	9	11	11
4	5	7	9	7	9	9
3	4	6	8	6	8	8
2	3	5	7	5	7	7
1	2	4	6	4	6	6

**Produktinformation Product Information**

Produktinformation Product Information	Physikalische Spezifikation Physical Properties
<b>Bezeichnung</b> Netz-Cable, Shielded, FTP, 500m, Simplex, D <sub>ca</sub>	<b>AWG</b> 22/1
<b>Material</b> PVC	<b>Bandbreite</b> 2000 MHz
<b>Norm</b> EN 50323-3-10, EN 50323-3-11, EN 50323-3-12, EN 50323-3-13, EN 50323-3-14, EN 50323-3-15, EN 50323-3-16, EN 50323-3-17, EN 50323-3-18, EN 50323-3-19, EN 50323-3-20, EN 50323-3-21, EN 50323-3-22, EN 50323-3-23, EN 50323-3-24, EN 50323-3-25, EN 50323-3-26, EN 50323-3-27, EN 50323-3-28, EN 50323-3-29, EN 50323-3-30, EN 50323-3-31, EN 50323-3-32, EN 50323-3-33, EN 50323-3-34, EN 50323-3-35, EN 50323-3-36, EN 50323-3-37, EN 50323-3-38, EN 50323-3-39, EN 50323-3-40, EN 50323-3-41, EN 50323-3-42, EN 50323-3-43, EN 50323-3-44, EN 50323-3-45, EN 50323-3-46, EN 50323-3-47, EN 50323-3-48, EN 50323-3-49, EN 50323-3-50, EN 50323-3-51, EN 50323-3-52, EN 50323-3-53, EN 50323-3-54, EN 50323-3-55, EN 50323-3-56, EN 50323-3-57, EN 50323-3-58, EN 50323-3-59, EN 50323-3-60, EN 50323-3-61, EN 50323-3-62, EN 50323-3-63, EN 50323-3-64, EN 50323-3-65, EN 50323-3-66, EN 50323-3-67, EN 50323-3-68, EN 50323-3-69, EN 50323-3-70, EN 50323-3-71, EN 50323-3-72, EN 50323-3-73, EN 50323-3-74, EN 50323-3-75, EN 50323-3-76, EN 50323-3-77, EN 50323-3-78, EN 50323-3-79, EN 50323-3-80, EN 50323-3-81, EN 50323-3-82, EN 50323-3-83, EN 50323-3-84, EN 50323-3-85, EN 50323-3-86, EN 50323-3-87, EN 50323-3-88, EN 50323-3-89, EN 50323-3-90, EN 50323-3-91, EN 50323-3-92, EN 50323-3-93, EN 50323-3-94, EN 50323-3-95, EN 50323-3-96, EN 50323-3-97, EN 50323-3-98, EN 50323-3-99, EN 50323-3-100	

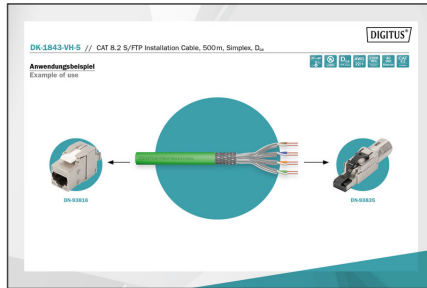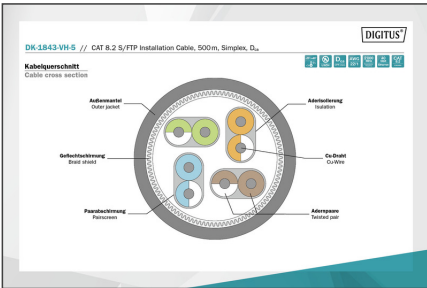


**CAT 8.2 S/FTP Installation Cable, 500 m, Simplex, D<sub>ca</sub>**

- AWG 22/1
- 2000 MHz
- 40 Gbit Ethernet
- CAT 8.2
- 20° / +60°
- LSZH
- D<sub>ca</sub> CPR class

**CEP Konformität**

CEP Konformität	Bezeichnung des Konformitäts-Symbols	Leistungsfähigkeit (Power)	Adaptierbarkeit (Adaptability)	Zusätzliche Eigenschaften (Additional Properties)
B2 <sub>ca</sub>	Sehr hoch Very high	1+	• Spannungsbereich • Temperaturbereich • Feuchtigkeitstoleranz • Temperaturwechselbereich • Temperaturwechselbereich	• Spannungsbereich • Temperaturbereich • Feuchtigkeitstoleranz • Temperaturwechselbereich • Temperaturwechselbereich
C <sub>ca</sub>	Hoch High	3	• Spannungsbereich • Temperaturbereich • Feuchtigkeitstoleranz • Temperaturwechselbereich • Temperaturwechselbereich	• Spannungsbereich • Temperaturbereich • Feuchtigkeitstoleranz • Temperaturwechselbereich • Temperaturwechselbereich
D <sub>ca</sub>	Mittel Medium			
E <sub>ca</sub>	Gering Low			

Strom: C<sub>ca</sub> s1a d1 a1

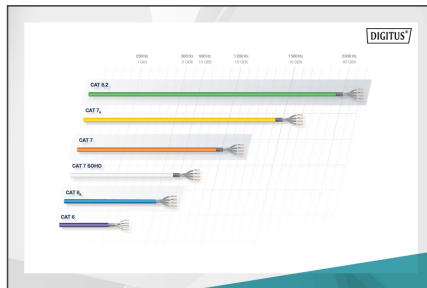

**Compliance Statement**

Approved Class: Class II (Category II)

EN 50323-3-10, EN 50323-3-11, EN 50323-3-12, EN 50323-3-13, EN 50323-3-14, EN 50323-3-15, EN 50323-3-16, EN 50323-3-17, EN 50323-3-18, EN 50323-3-19, EN 50323-3-20, EN 50323-3-21, EN 50323-3-22, EN 50323-3-23, EN 50323-3-24, EN 50323-3-25, EN 50323-3-26, EN 50323-3-27, EN 50323-3-28, EN 50323-3-29, EN 50323-3-30, EN 50323-3-31, EN 50323-3-32, EN 50323-3-33, EN 50323-3-34, EN 50323-3-35, EN 50323-3-36, EN 50323-3-37, EN 50323-3-38, EN 50323-3-39, EN 50323-3-40, EN 50323-3-41, EN 50323-3-42, EN 50323-3-43, EN 50323-3-44, EN 50323-3-45, EN 50323-3-46, EN 50323-3-47, EN 50323-3-48, EN 50323-3-49, EN 50323-3-50, EN 50323-3-51, EN 50323-3-52, EN 50323-3-53, EN 50323-3-54, EN 50323-3-55, EN 50323-3-56, EN 50323-3-57, EN 50323-3-58, EN 50323-3-59, EN 50323-3-60, EN 50323-3-61, EN 50323-3-62, EN 50323-3-63, EN 50323-3-64, EN 50323-3-65, EN 50323-3-66, EN 50323-3-67, EN 50323-3-68, EN 50323-3-69, EN 50323-3-70, EN 50323-3-71, EN 50323-3-72, EN 50323-3-73, EN 50323-3-74, EN 50323-3-75, EN 50323-3-76, EN 50323-3-77, EN 50323-3-78, EN 50323-3-79, EN 50323-3-80, EN 50323-3-81, EN 50323-3-82, EN 50323-3-83, EN 50323-3-84, EN 50323-3-85, EN 50323-3-86, EN 50323-3-87, EN 50323-3-88, EN 50323-3-89, EN 50323-3-90, EN 50323-3-91, EN 50323-3-92, EN 50323-3-93, EN 50323-3-94, EN 50323-3-95, EN 50323-3-96, EN 50323-3-97, EN 50323-3-98, EN 50323-3-99, EN 50323-3-100