

# DIGITUS Prespojni kabel Kat. 6 U/UTP - LSZH

**DK-1617-030**  
**EAN 4016032387824**



**DK-1617-030 PRES.KABEL UTP C6 LSOH 3M SIVI CU AWG 26/7, length 3 m, color grey**

DIGITUS® prespojni kabeli Kat. 6 klase E proizvedeni su i testirani sukladno ISO/IEC 11801 i DIN EN 50173 Kat.6 specifikacijama. Garantiraju sukladnost ugrađenog sustava ožičenja zahtjevima specifikacija ISO & EN kanala i omogućuju optimalne razine performansi DIGITUS® kategorije 6 kabliranja. Performanse su testirane na brzinama do 250 MHz uključujući karakteristike performansi kao što je gubitak preslušavanje na bližem kraju ("NEXT"). DIGITUS® prespojni kabeli dizajnirani su i proizvedeni kako bi u potpunosti zadovoljili uporabu u različitim i najzahtjevnijim aplikacijama. Svaki kabel opremljen je s pregibnicom. Pregibnica je opremljena sa zaštitom polugice mikroutikača. Kategoriju 6 možete vrlo jednostavno prepoznati po mikroutikaču prozirno crvene boje.

**Vrhunsku kvalitetu Vaše mreže osigurava oprema proizvedena sukladno najnovijim standardima.**

- 2x RJ45 (8P8C) konektora





- Pregibnica je opremljena sa zaštitom polugice mikroutikača
- Oznaka dužine na pregibnici
- Vodič: Bakar (Cu)

**Attributes**

- Ambalaža: DIGITUS Polybag
- Asortiman: Patch kabeli s upređenim paricama
- Konektor 1: Modularni RJ45 (8/8) utikač
- Konektor 2: Modularni RJ45 (8/8) utikač
- Konfiguracija: 1:1
- Kategorija: CAT 6
- Oklop: U-UTP, neoklopljeno
- Duljina: 3 m
- Boja: sivi
- Kapica: LSOH
- Struktura: 4 x 2 AWG 26/7, upletena parica
- Tanka verzija: Ne
- Flat Version: Ne

| Logistics                    |              |             |            |            |             |                 |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 120          | 11.00       | 36.00      | 36.00      | 27.00       | 34.99           |
| Packaging Unit Inside        | 10           | 0.92        | 15.00      | 30.00      | 36.00       | 16.20           |
| Packaging Unit Single        | 1            | 0.09        | 1.60       | 17.00      | 25.00       | 680.00          |
| Net single without Packaging | 0            | 0.08        | 300.00     | 1.17       | 1.27        | 445.77          |

More images:

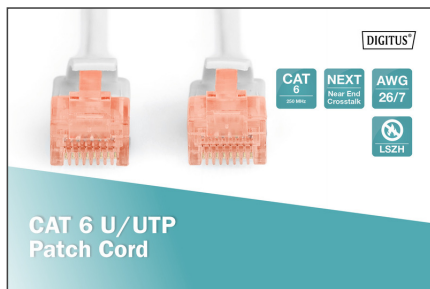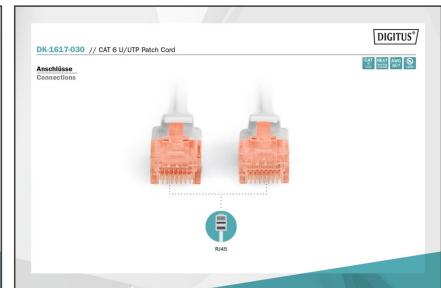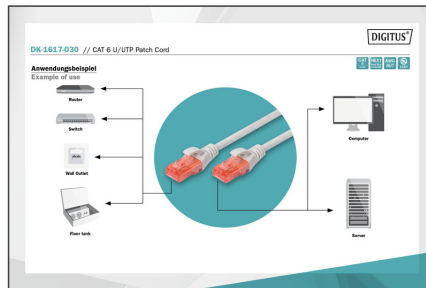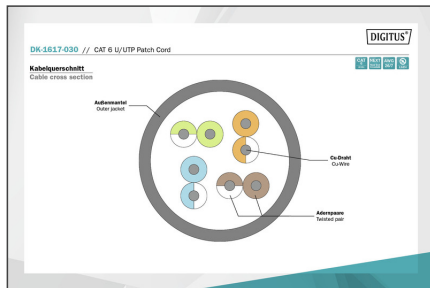

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Ensure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)