


DIGITUS HDMI High Speed connection cable, type C - A, HighFlex

DB-330121-020-S
EAN 4016032391326

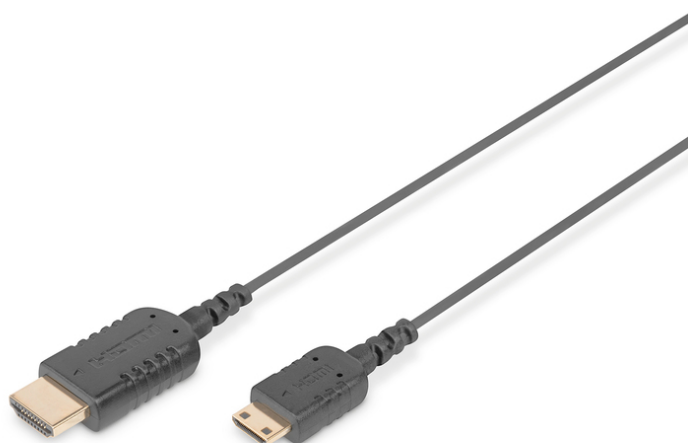

HDMI High Speed con. cable, type C - A, HighFlex M/M, 2.0m, 4K Ultra HD@30Hz, active

This UHD and Full 3D capable cable is used to connect audio-video devices with Mini HDMI (Type C) interface, such as notebooks, to a TV, monitor or PC. The double shielded cable connects an HDMI socket with a Mini HDMI socket. ARC & CEC and resolutions up to 4K are supported. The cable is also characterized by a small diameter and highest flexibility.

Connect devices with HDMI jacks to Mini HDMI jacks

- Supports 4K/2K with 30Hz
- Supports 3D
- Supports Audio Return Channel (ARC)
- Supports Consumer Electronic Control (CEC)



Attributes

- AWG: 30
- HDMI-norma: HDMI velike brzine
- HDTV-norma: Ultra HD 4K
- Kabel u boji: crni
- Kapice: ukalupljeno
- Konektor 1: HDMI tip C (mini), utikač
- Konektor 2: HDMI tip A, utikač
- Konektor u boji: crni
- Materijal žice: CU
- Površina konektora: pozlaćeno
- Duljina: 2 m
- AOC - aktivni optički kabel: Ne
- oklop: dvostruki oklop

Logistics

| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|------------------------------|--------------|-------------|------------|------------|-------------|--------|
| Packaging Unit Carton | 100 | 4.70 | 50.00 | 35.00 | 29.50 | 51.63 |
| Packaging Unit Inside | 1 | 0.05 | 9.50 | 7.50 | 3.60 | 256.50 |
| Packaging Unit Single | 1 | 0.05 | 9.50 | 7.50 | 3.60 | 256.50 |
| Net single without Packaging | 0 | 0.03 | 2.00 | 1.00 | 1.00 | 2.00 |

More images:

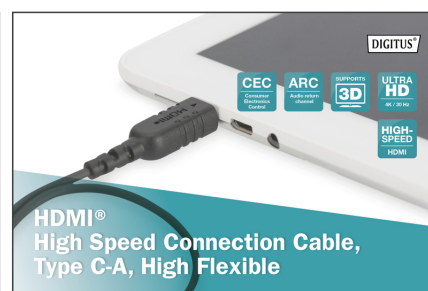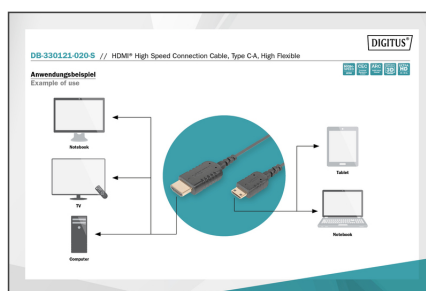



Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable.
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com