

DIGITUS HP-compatible mini GBIC (SFP) Module, 1.25 Gbps, 20km, with DDM Feature

DN-81003-01
EAN 4016032391562



DN-81003-01 SFP modul, HP komp. LC, simplex, DDM LC Simplex, Tx1310nm/Rx1550nm, up to 20km, HP

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Whether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

The plug and play fiber connection

- HP compatible
- HP-Aruba compatible
- Mini GBIC SFP (Small Form Factor Pluggable) module
- Supports DDM (Digital Diagnostic Monitoring)
- Bidirectional WDM Module - Only one fiber is needed
- High quality and excellent reliability
- 1.25 Gbps Maximum Data Rate
- Compliant to IEEE 802.3z Gigabit Standard
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant
- Hot pluggable
- Connector: 1x LC Simplex


- Wavelength: Tx 1310nm / Rx 1550nm
- Transmission Power: Minimum -5 dBm, Maximum 0 dBm
- Sensitivity receiving power: minimum -24 dBm
- For a Distance of up to 20km
- Suitable for 09/125µm Singlemode Fiber Cables
- Safe fast-locking mechanism
- 3.3V power supply
- Operating temperature: 0 °C ~ 70 °C
- Compatible with the following manufacturers: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon, Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE
- Mod: Jednomodni
- Priključak: LC
- Udaljenost (km): 20
- Valna duljina: 1310/1550 nm
- DDM podrška: Da
- Kompatibilnost proizvođača: HP
- Način emitiranja: Dvosmjerno
- Ethernet brzina: Brzi Ethernet

Package contents

- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	240	8.50	50.00	29.00	54.50	79.03
Packaging Unit Inside	1	0.04	7.00	20.00	30.00	4.20
Packaging Unit Single	1	0.04	3.00	11.50	9.00	310.50
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

More images:

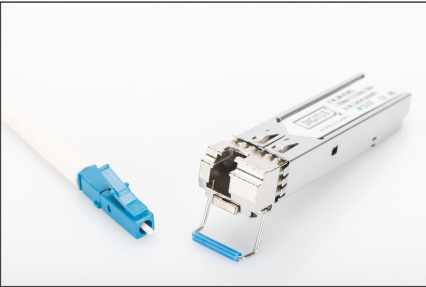

SFP Modules							
Part Number	SKU Code	Speed	Distance	Connector	Mounting	Operating Temperature	Industrial Version
Ds-1000	4010000000001	10 Gbps	10 km	LC Multimode OM3	19mm	0 to +70 °C	
Ds-1000	4010000000002	10 Gbps	10 km	LC Singlemode Duplex	19mm	0 to +70 °C	
Ds-1000	4010000000003	10 Gbps	10 km	LC Singlemode Duplex	19mm	0 to +70 °C	
SFP+ Modules							
Ds-2500	4010000000004	25 Gbps	10 km	LC Multimode OM3	19mm	0 to +70 °C	
Ds-2500	4010000000005	25 Gbps	10 km	LC Singlemode Duplex	19mm	0 to +70 °C	
Ds-2500	4010000000006	25 Gbps	10 km	LC Singlemode Duplex	19mm	0 to +70 °C	
Ds-2500	4010000000007	25 Gbps	10 km	LC Singlemode Duplex	19mm	0 to +70 °C	
Ds-2500	4010000000008	25 Gbps	10 km	LC Singlemode Duplex	19mm	0 to +70 °C	
Ds-2500	4010000000009	25 Gbps	10 km	LC Singlemode Duplex	19mm	0 to +70 °C	
Ds-2500	4010000000010	25 Gbps	10 km	LC Singlemode Duplex	19mm	0 to +70 °C	
Ds-2500	4010000000011	25 Gbps	10 km	LC Singlemode Duplex	19mm	0 to +70 °C	
SFP28 Modules							
Ds-2800	4010000000012	28 Gbps	10 km	LC Multimode OM3	19mm	0 to +70 °C	
Ds-2800	4010000000013	28 Gbps	10 km	LC Singlemode Duplex	19mm	0 to +70 °C	
SFP24 Modules							
Ds-2400	4010000000014	24 Gbps	10 km	LC Singlemode Duplex	19mm	0 to +70 °C	✓
Ds-2400	4010000000015	24 Gbps	10 km	LC Singlemode Duplex	19mm	0 to +70 °C	✓
Ds-2400	4010000000016	24 Gbps	10 km	LC Singlemode Duplex	19mm	0 to +70 °C	✓
Ds-2400	4010000000017	24 Gbps	10 km	LC Singlemode Duplex	19mm	0 to +70 °C	✓
Ds-2400	4010000000018	24 Gbps	10 km	LC Singlemode Duplex	19mm	0 to +70 °C	✓
Ds-2400	4010000000019	24 Gbps	10 km	LC Singlemode Duplex	19mm	0 to +70 °C	✓
Ds-2400	4010000000020	24 Gbps	10 km	LC Singlemode Duplex	19mm	0 to +70 °C	✓