


# DIGITUS Oklopljeni RJ45 mikroutikač za nabacivanje na gradilištu

DN-93631  
EAN 4016032392231

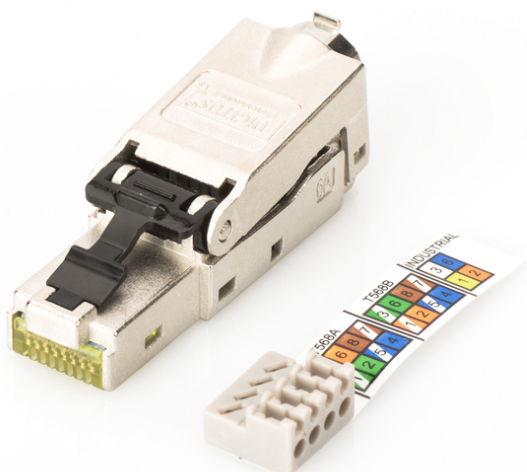

**AMO 8/8 M-KON. C6A, FTP, 10Gbit, field assembly dust cap, TIA 568-A,B,Profinet**

DIGITUS® Kat. 6A RJ45 mikroutikač za nabacivanje na gradilištu moderan je i visokokvalitetan mikroutikač koje karakterizira uvijek jednostavna i brza primjena te pouzdanost. Brza montaža u 60 s bez uporabe specijalnih alata te visoka fleksibilnost savršeno je rješenje za bilo koje gradilište. Prikladan je za uporabu na svim mrežama do 10 Gigabit Ethernet. Ovaj inovativni RJ45 mikroutikač je logična posljedica zadovoljnog kupca uslijed njegove brze montaže, ušteda kod instalacije, popravaka i održavanja. Zašto komplicirati stvari koje mogu biti tako jednostavne? Provjerite sami!


- Preassembled protection cap
- Robust zinc diecast housing
- 360° cable screen connection for enhanced EMI protection
- Can be assembled in 60 seconds without any special tools
- Optimised for the field, including demanding applications
- Secure transmission even with outside interference
- Ideal for network repairs, special length and extensions
- Cross sections AWG 27/7-22/7, AWG 24/1-22/1

- Insulation: 0.85 - 1.6 mm
- Cable diameter: 5.0-9.0 mm
- Dimensions (W x H x D): 12.5 x 13.0 x 45.0 mm
- Weight: 78 g
- --Climatic Characteristics:
- Operating temperature: -40 °C to +80 °C
- --Electrical Characteristics:
- Current carrying capacity at 50°C: 1 A
- PoE+ acc to IEEE 802.3at: Adequate for Power over Ethernet+
- --Standards:
- Gigabit Ethernet acc. to IEEE 802.3
- 10 Gigabit Ethernet acc. to IEEE 802.3an: Adequate for 10 Gigabit Ethernet

**Package contents**

- 1x plug with dust cap
- 1x sleeve with kink protection and strain relieve
- 1x wire manager with wiring instruction
- 1x cable tie
- 1x mounting instruction

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	250	9.44	54.00	31.00	28.00	46.87
Packaging Unit Inside	1	0.04	12.50	4.50	2.50	140.63
Packaging Unit Single	1	0.04	12.50	4.50	2.50	140.63
Net single without Packaging	0	0.04	12.50	4.50	2.50	140.63

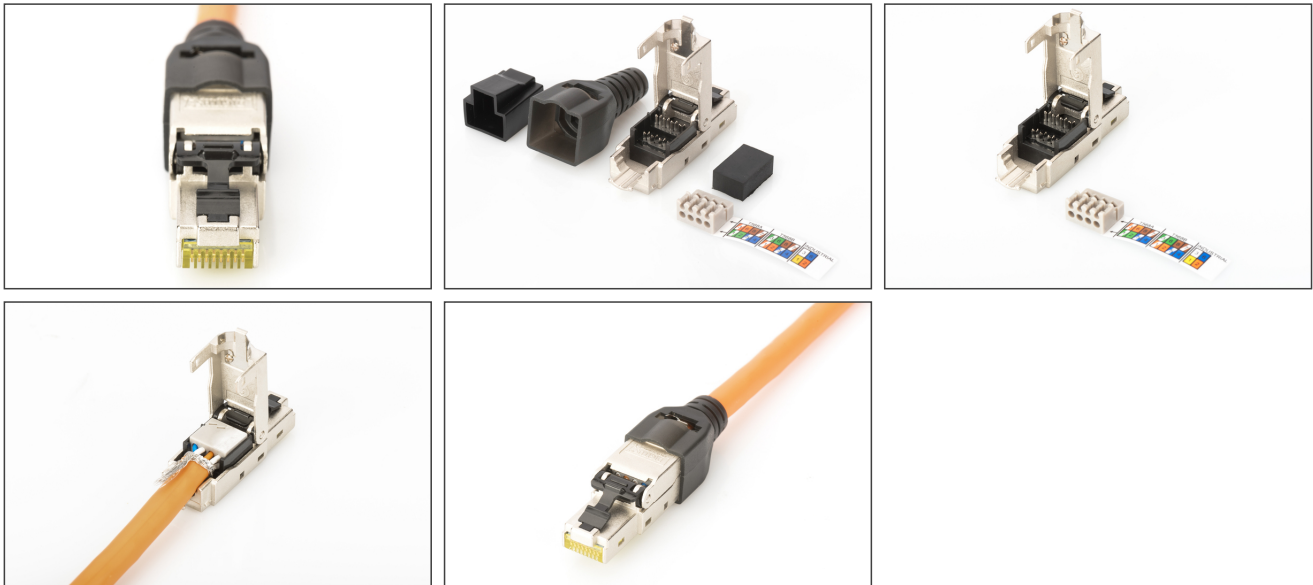**More images:****Safety notes**

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)