

DIGITUS HDMI 3in1 Adapter / Converter

AK-330403-002-S
EAN 4016032433866



HDMI converter cable, HDMI - DP+DVI+VGA M-F/F/F, 0,2m, 3 in 1 Multi-Media cable,

This adapter / converter will be used to connect your Computer, laptop or Blue-Ray Player with HDMI Type A interface to any DisplayPort, DVI or VGA display. The input HDMI signal will be converted to DisplayPort, DVI or VGA signals.


No need to buy 3 single adapter

- Support 4K/2K with 30Hz
- HDMI 1.4 Data rate up to 3Gbit/s
- Compliant with DisplayPort 1.2a specification
- VGA resolution up to WUXGA 1920x1200 dpi (reduced blanking)
- DVI & VGA interfaces support Full HD 1080P@60Hz
- The USB connection (Type A plug) can be optional used for power supply.
- Plug and Play Installation
- Ambalaža: Polybag

- Asortiman: HDMI kabele
- AWG: 28/30
- HDMI-norma: HDMI velike brzine
- HDTV rezolucija maks.: 4096 x 2160 piksela, 60 Hz
- HDTV-norma: Ultra HD 4K
- Kabel u boji: crni
- Kapice: ukalupljeno
- Konektor 1: HDMI tip A, utikač
- Konektor 2: HDMI tip A/F + DVI-D(24+1)/F
- Konektor u boji: crni
- Materijal žice: CU
- Površina konektora: pozlaćeno
- Vrsta kabela: Dvostruka veza
- Duljina: 0.2 m
- AOC - aktivni optički kabel: Ne
- oklop: trostruki oklop

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	200	13.80	38.10	30.20	31.10	35,784.30
Packaging Unit Inside	10	0.69	27.94	40.64	8.50	9,651.59
Packaging Unit Single	1	0.07	20.00	15.50	1.70	527.00
Net single without Packaging	0	0.06	23.70	4.00	1.60	151.68

More images:

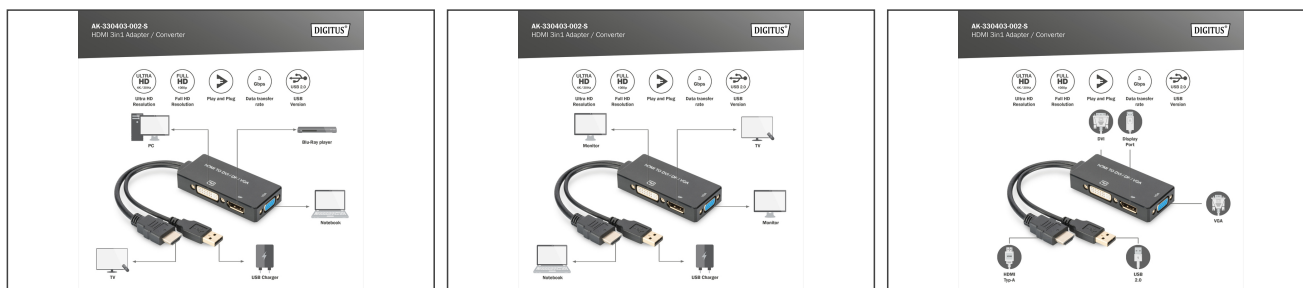

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable.
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com