

# DIGITUS 4 port Fast Ethernet network PoE switch, industrial, unmanaged, 1 RJ45 uplink

DN-650107  
EAN 4016032458852



### Industrial 4-port Fast Ethernet PoE Switch 1 uplink port, DIN rail, extend. temp. range

The DIGITUS® Industrial Fast Ethernet Switch is designed for harsh environments where it is exposed to humidity, temperature fluctuations and vibrations. With a temperature range of -40°C to 80°C, the Industrial Fast Ethernet Switch can be used under the most adverse conditions. Thanks to the PoE ports with IEEE802.3af/at support, PoE-capable devices can be supplied with up to 30 W per port. Constant availability is guaranteed in highly sensitive areas such as transportation, production, traffic and security surveillance. Thanks to the simple plug-and-play system, the Industrial Fast Ethernet Switch can be quickly integrated into the respective environment. Thanks to its Fast Ethernet connectivity, the Industrial Fast Ethernet Switch is a flexible, cost-effective solution for industrial environments.

### Robust and durable industrial solutions with integrated Power over Ethernet (PoE) function

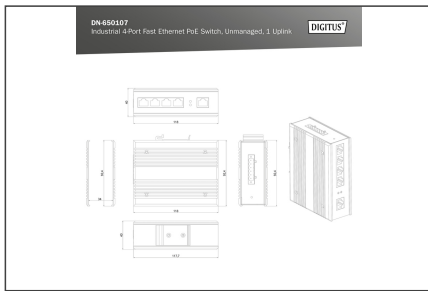
- 4 x 10/100Base-TX Ethernet PoE ports
- 1 x 10/100Base-TX Ethernet uplink port
- Supports IEEE802.3af/at
- Automatic cable detection - Auto MDI / MDI-X function
- Supported standards: IEEE 802.3 10BaseT, IEEE 802.3u 100BaseTX, IEEE802.3af, IEEE802.3at
- IEEE802.3x Flow Control and Back Pressure
- Store-and-forward technology for optimized data transfer
- Automatic speed and half/full duplex detection/adjustment
- Backplane with 1.6Gbps

- MAC address memory 2K
- Compact, robust metal housing
- Excellent protection against short circuits
- Lightning protection and surge protection
- Suitable for mounting on DIN rail (top-hat rail)
- Redundant power supply: 48-57 V DC, redundant power supply with polarity reversal protection function
- Extended operating temperature range, -40 °C ~ +80 °C
- Removable terminal connection
- Protection class: IP40
- Broj priključaka: 4
- PoE norma: IEEE802.3at (PoE+)
- PoE potrošnja energije: 100 W
- Ethernet brzina: Brzi Ethernet
- Industrijska uporaba: Da
- Broj priključaka (Uplink): 1
- PoE (napajanje preko Ethernet): Da
- Prikladno za vanjsku primjenu: Ne
- Upravljanje: Ne
- Veza uzlaznog (Uplink) priključka: RJ45
- VLAN: Ne
- Vrsta instalacije: DIN tračnica
- Zaštita od vandalizma: Ne

### Package contents

- Industrial 4-port Fast Ethernet PoE switch + 1 uplink port
- Quick start guide

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	72	34.80	46.00	64.50	36.00	106.81
Packaging Unit Inside	1	0.48	13.50	16.20	5.30	1,159.11
Packaging Unit Single	1	0.48	13.50	16.20	5.30	1,159.11
Net single without Packaging	0	0.36	8.60	11.80	3.90	395.77

**More images:****Safety notes**

- This product is intended for indoor use only.
- Read all instructions and follow all warnings and instructions on the device.
- Do not place this appliance on an unstable surface (such as a trolley, stand, table, etc.).
- Do not use this appliance near water.
- Do not place this appliance near or above a radiator.
- The housing is equipped with openings for heat dissipation and ventilation. To prevent overheating during operation, the ventilation openings must not be blocked or covered.
- Do not place the appliance on a soft surface (e.g. bed, sofa, blanket, etc.). This will block the ventilation.
- The appliance must not be installed in a closed environment if adequate ventilation is not guaranteed.
- Do not spray any liquids onto the appliance.
- Disconnect the mains plug before cleaning. Do not use any liquid or foam cleaners.
- Clean the appliance with a damp cloth.
- Connect the device according to the power supply on the rating plate.
- To prevent damage to the appliance, it is important that all appliances are properly earthed.
- Do not place any objects on the power cable and lay it in such a way as to avoid tripping hazards.
- Use a surge protector, a regulator or an uninterruptible power supply (UPS) to protect your system from sudden, temporary and reduced power.
- Secure the system cable and mains cable properly and ensure that no objects are pressing on the cable.
- Do not insert any objects into the appliance through the openings in the housing. There is a risk of a short circuit, which can lead to fire or electric shock.
- Do not attempt to repair the appliance yourself. Always contact an authorized customer service centre.
- If any of the following conditions occur, unplug the appliance and send it to an authorized service centre for repair
  - The mains cable, power supply unit or plug for the power supply is damaged or worn;
  - Liquid has penetrated the appliance;
  - The device has been exposed to rain or water;
  - The device has been dropped or the housing has been damaged;
  - The function of the device has obviously changed;
- The appliance cannot be operated as described in the operating instructions.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)