


# DIGITUS CAT 6A S/FTP patch cord, Component Level tested

DK-1644-A-030CL  
EAN 4016032464679

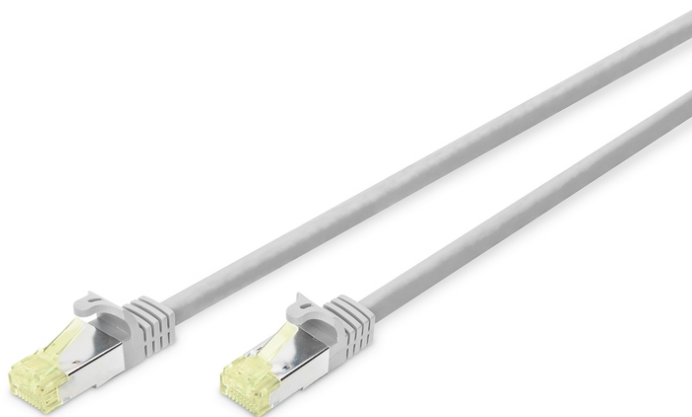

## CAT 6A S/FTP patch cord, Cu, LSZH, component level AWG 26/7, length 3m, color grey

The DIGITUS® Category 6A Class EA patch cords are manufactured and tested to the ISO/IEC 11801 and DIN EN 50173 Category 6 A specifications. They will guarantee the installed cabling system is compliant with the ISO & EN channel specification requirements and will provide optimum performance levels of DIGITUS® Category 6A cabling. In addition, the cables are component level tested, i.e. the cable components are also subjected to individual tests. The performance is tested up to 500 MHz inclusive performance characteristics such as near end cross talk ("NEXT"). DIGITUS® patch cords are designed and produced to fulfill the highest requirements of various application areas in full volume. Each cable is fitted with a molded boot which comes with kink protection and strain relief. Furthermore the boot is equipped with a latch protection that prevents the latching lever against breaking. You can easily identify the Category 6A, because of the transparent yellow colored connector.

## Future-oriented standards and high-end quality for your network - Component Level tested

- 2x RJ45 (8P8C) connectors
- Boots with kink protection, strain relief and latch protection
- Length marking on boot
- Conductor: Cu
- Configuration: 1:1
- Category: CAT 6A
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 3 m
- Color: grey
- Jacket: LSOH
- Slim Version: no
- Structure: 4 x 2 AWG 26/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	80	9.60	46.00	33.00	28.00	42.50
Packaging Unit Inside	1	0.12	30.00	36.00	10.00	10.80
Packaging Unit Single	1	0.12	1.80	17.00	25.00	765.00
Net single without Packaging	0	0.10	300.00	1.17	1.27	445.77

### More images:

