1

# **DIGITUS 3-in-1 charging cable**

DB-300160-002-S EAN 4016032466208





# USB charger cable, Lightning+micro B+Type-C 0.15m, 3 in 1 cable, cotton, CE, bl

The DIGITUS® 3-in-1 charging cable is ideal for charging your portable devices on a power supply, PC or other device with a USB-A port. Use a single cable to charge all your devices. Its compact dimensions make this cable an ideal companion for home, office or travel.

# 3-in-1 multi-charging cable for connecting devices with a USB-C, micro-USB or 8-pin connector to a USB-A port

- Supported charging power: 10 W (5 V / 2 A)
- Operating temperature: -10 °C to +50 °C
- Operating humidity: 0 75%
- Port 1: USB-A, male

• Connector 2: Apple, male/ 
Micro-USB, male/ 
USB-C, male

## Attributes


- AWG: 30
- Kabel u boji: crni
- Kapice: Metalno kućište
- Konektor 1: USB A, utikač
- Materijal žice: CU
   Površina konektor
- Površina konektora: poniklano
- Duljina: 0.15 m
- oklop: bez oklopa
- USB-C proizvodi: Da

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	40	7.50	29.00	55.00	20.00	31.90
Packaging Unit Inside	10	1.88	26.50	27.50	9.00	6,558.75
Packaging Unit Single	1	0.19	7.50	23.50	2.00	352.50
Net single without Packaging	0	0.03	46.80	15.00	0.30	210.60

### More images:





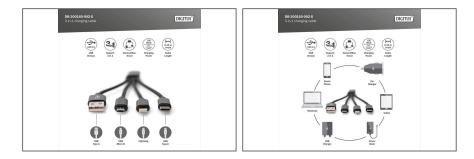

#### Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH Auf dem Schüffel 3 Lüdenscheid, Germany https://www.assmann.com info@assmann.com