

# DIGITUS Modular HD LCD KVM console with 17" TFT, 16-port VGA KVM connection, touchpad, Spanish keyboard layout

DS-72220-3ES  
EAN 4016032484837



### Modular 43,2cm HD LCD TFT console, 16 Port VGA with 16 port VGA KVM, ES keyboard, RAL 9005 black

The Digitus HD LCD KVM console - with a 17" TFT monitor with anti-reflective and shatter-proof protective glass panel. The console can be completely pulled out of the server cabinet and the TFT screen can be tilted by 120 degrees. This console supports various cabinets from 800mm to 1200mm depth and comes complete with all KVM cables. With full HD resolution of 1080P and LED indicator for connection status, this console also features a USB peripheral port in the console area. Enjoy up to 85% more space and a contrast ratio of 1000:1 and support for 16.7 million colors with this console. The package includes a 16-port VGA adapter, a keyboard and a touch-board mouse with two function keys. With a modular and expandable design, this console can also be cascaded.

#### Maximum flexibility in the administration of the server farm

- TFT monitor 43.2 cm (17"), with anti-reflective, shatter-proof protective glass pane
- The console can be completely pulled out of the server cabinet and the TFT screen can be tilted by 120 degrees
- " Supports various cabinets from 800mm to 1200mm depth □ All KVM cables are included in the scope of delivery "
- Full HD 1080P resolution
- 1x USB peripheral port in the console area
- LED display for the connection status
- TFT monitor 43.2 cm (17"), with anti-reflective, shatter-proof protective glass pane
- The console can be completely pulled out of the server cabinet and the TFT screen can be tilted by 120 degrees


- Resolution: 1920x1080 at 60 Hz
- Console creates up to 85 % more space
- Contrast ratio: 1000:1
- Supports: 16.7 M colors
- 16 port VGA switch included
- Spanish keyboard included
- Mouse touch board with two function buttons
- The console can be completely pulled out of the server cabinet and the TFT screen can be tilted by 120 degrees
- Gross weight: 19.15 kg
- Console safety lock to prevent damage
- Space-saving housing (1U), black (RAL 9005)
- Interface: VGA
- Keyboard Layout: ES
- Number of ports: 16
- Screen size: 17 inch
- Cascading possible: yes
- Interface: VGA
- Keyboard Layout: ES
- Number of ports: 16
- Screen size: 17 inch

#### Package contents

- Modular 17" console
- 16 port VGA KVM switch
- Keyboard
- Quick start guide
- Power supply unit
- Mounting material
- 16 VGA + USB connection cable (1.8 m)

| Logistics                    |              |             |            |            |             |                 |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 1            | 3.20        | 62.50      | 75.50      | 18.60       | 87,768.80       |
| Packaging Unit Inside        | 1            | 3.20        | 0.00       | 0.00       | 0.00        | 0.00            |
| Packaging Unit Single        | 1            | 3.20        | 62.50      | 75.50      | 18.60       | 87,768.80       |
| Net single without Packaging | 0            | 1.47        | 44.50      | 50.85      | 4.50        | 10,182.70       |

**More images:**

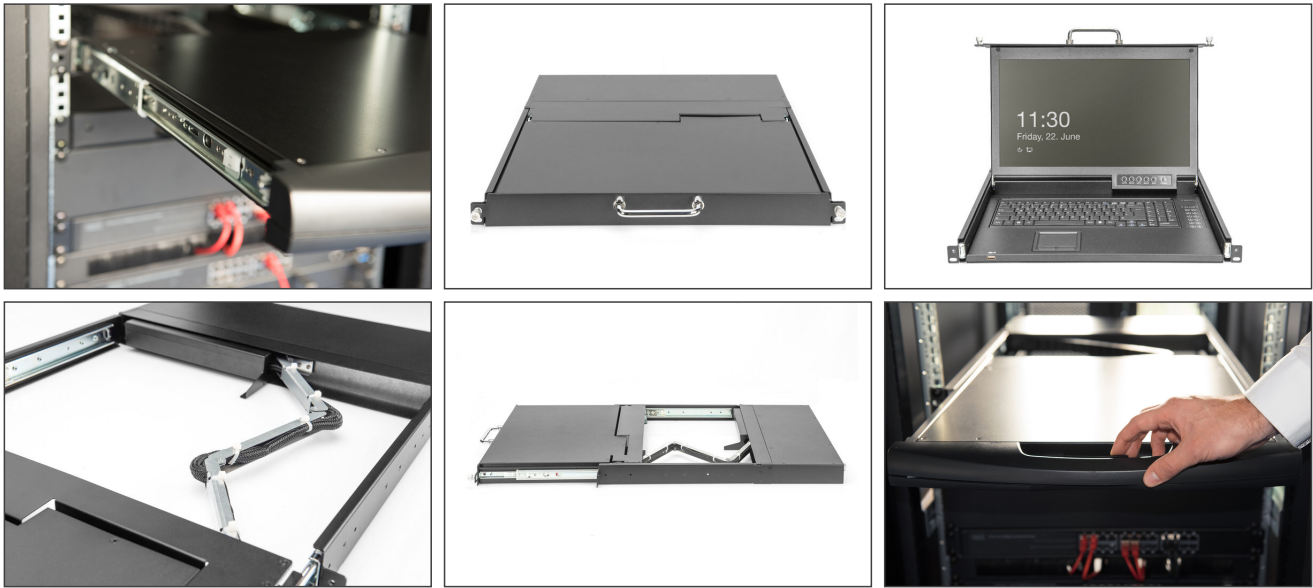

**Safety notes**

- This product is intended for indoor use only.
- Read all instructions.
- Follow all warnings and instructions on the device.
- Do not place this appliance on an unstable surface (such as a trolley, stand, table, etc.).
- If this appliance falls, it can cause serious damage.
- Do not use this appliance near water.
- Do not place this appliance near or above a radiator.
- The housing is equipped with openings for heat dissipation and ventilation. To prevent overheating during operation, the ventilation openings must not be blocked or covered.
- Do not place the appliance on a soft surface (e.g. bed, sofa, blanket, etc.). This will block the ventilation.
- The appliance must not be installed in a closed environment if adequate ventilation is not guaranteed.
- Do not spray any liquids onto the appliance.
- Disconnect the mains plug before cleaning. Do not use any liquid or foam cleaners.
- Clean the appliance with a damp cloth.
- Connect the device according to the power supply on the rating plate.
- This device is designed for the IT distribution system with 100 V - 230 V voltage.
- To prevent damage to the appliance, it is important that all appliances are properly earthed.
- Do not place any objects on the power cable and lay it in such a way as to avoid tripping hazards.
- If an extension cable is used for the appliance, make sure that the total capacity of all products using the cable does not exceed the current load.
- Ensure that the total current of all products connected to the socket does not exceed 15 A.
- Use a surge protector, a regulator or an uninterruptible power supply (UPS) to protect your system from sudden, temporary and reduced power.
- Secure the system cable and mains cable properly and ensure that no objects are pressing on the cable.
- Do not insert any objects into the appliance through the openings in the housing. There is a risk of a short circuit, which can lead to fire or electric shock.
- Do not attempt to repair the appliance yourself. Always contact an authorized customer service centre.
- If any of the following conditions occur, unplug the appliance and send it to an authorized service centre for repair
  - The mains cable or plug is damaged or worn;
  - Liquid has penetrated the appliance;
  - The device has been exposed to rain or water;
  - The device has been dropped or the housing has been damaged;
  - The function of the device has obviously changed;
- The appliance cannot be operated as described in the operating instructions.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)