


DIGITUS Keystone utični modul Kat. 6A, oklopljeni, ožičenje bez alata - 48 ks

DN-93615-48
EAN 4016032490586

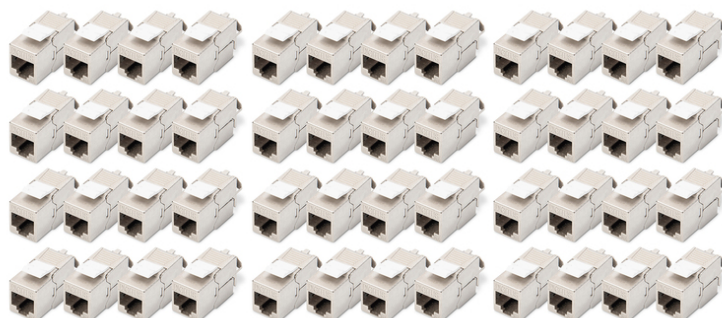

CAT 6A Keystone Jack, shielded, 48 pcs. tool free connection

Artikl DN-93615 iz DIGITUS® ponude je oklopljeni keystone utični modul Kat. 6A za ožičenje bez alata koji osigurava najbolje moguće performanse i kvalitetu linka Vaše mreže. Kompaktan dizajn omogućava ugradnju 24 komada na 1U prespojnim panelima 483 mm (19"). Sukladan je Kategoriji 6A / 10GBase-T Channel, ANSI/EIA/TIA 568C.2.1 :2002, ISO/IEC 11801:2002.

Quick and safe wire terminations without any special tool

- Category 6A 10GBase-T, 500 MHz
- ISO/IEC 11801 3rd Edition, EN 50173-1
- Suitable for PoE/PoE+/4PPoE (IEEE 802.3af, 802.3at, 802.3bt)
- Suitable for modular patch panel and modular wall outlet installation.
- RJ45-Jack, 8P8C
- Cable installation via insulation-displacement connectors, color coded in accordance with EIA/TIA 568 A & B
- Cable grip and cable fixation using intelligent cable manager
- Tool-free mounting connection
- 360° shield contact
- Case material: Zinc die-cast – nickel-plated




- Contact material: Phosphor bronze
- Contact coating: Nickel, gold-plated 0.5 μ
- Insertion force: Max. 30N (as per IEC 60603-7-51)
- Holding force: 7.7 kg between jack and plug
- Operating temperature range: -20 °C to +70 °C (ISO/IEC 11801, ANSI/TIA 568 C.2)
- Mating cycles: ≥ 750 (ISO/IEC 11801, IEC 60603-7-51)
- Copper cable diameter: AWG (26/7 – 22/1), stranded and solid wire
- Tested with AWG 22/1 solid installation cable
- (DIGITUS® DK-174X-A-VH-X; AWG 22/1 cat. 7A installation cable)
- Dielectric strength: 1000 VDC (contact/contact), 1500 VDC (contact/ground)
- Tool-free installation using LSA insulation-displacement connectors color coded in accordance with EIA/TIA 568 A & B
- Intelligent cable manager (resealable)
- CAT 6A Keystone Module, shielded Set: 48 pcs.
- Dimensions (HxWxD): 21.0 x 14.5 x 34.5 mm
- Weight: 19.5 g

Attributes

- Kategorija: CAT 6A

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	2	1.25	23.00	23.00	7.50	3,967.50
Packaging Unit Inside	1	0.63	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.63	3.10	1.50	2.10	9.77
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

More images:

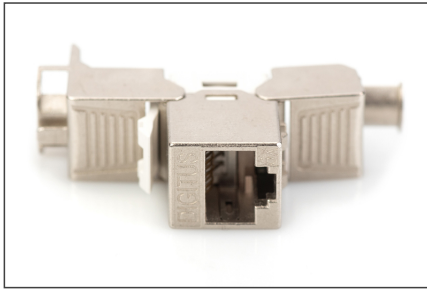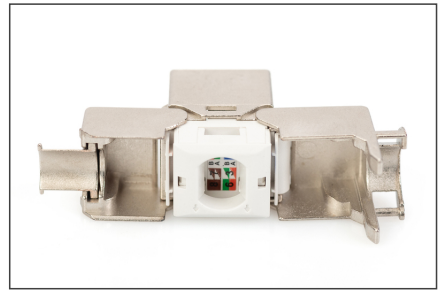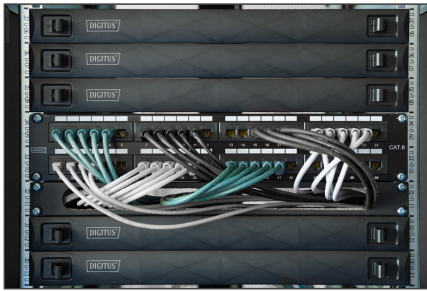

Safety notes

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com