


# DIGITUS USB M.2 hard disk enclosure, SSD, external, NVMe , 10Gbps, USB 3.1 Gen2, aluminum, toolfree

DA-71120-1  
EAN 4016032497578

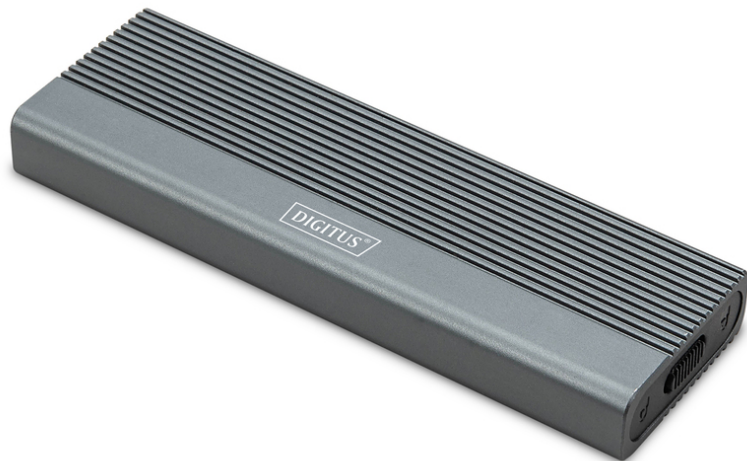

**USB hard disk enclosure, external, NVMe 10Gbps ,USB3.1 Gen2,alu,toolfree**

The DA-71120-1 M.2 NVMe SSD enclosure offers a powerful and versatile storage solution for all your data needs. It supports M.2 modules in 2230, 2242, 2260 and 2280 formats and is compatible with a wide range of SSDs. With a capacity of up to 8 TB, it offers enough space for all your files and data. Thanks to the fast data transfer rate of 10 Gbps and the USB 3.1 Gen 2 interface, which is backwards compatible with USB 3.1, 3.0, 2.0 and 1.1, you can enjoy fast file transfers and smooth performance. The plug-and-play design allows for easy installation without complicated settings. The robust JMS583 chipset ensures reliable and efficient NVMe performance, while the integrated LED indicator allows easy monitoring of SSD status. The durable and stylish aluminum housing in Pantone 430C provides excellent passive heat dissipation. With compact dimensions of 101x32x10 mm and a weight of only 97 g, the housing is ideal for mobile use and compatible with Windows, macOS, Linux, Google Chrome OS, Android and iOS.

**The DA-71120-1 M.2 NVMe SSD enclosure will become your preferred solution for high capacity, high speed storage. This elegant, tool-less enclosure supports mini SSDs in M.2 B+M key format.**

- Supported Mini SSD in format: M.2, B+M Key(NVMe)
- Supported storage technology: NVMe
- Max. supported capacity: 8TB
- Installation method: tool-free



- Data transfer rate: 10 Gbit/s
- Supports M.2 modules in the format:2230,2242,2260,2280
- Supported keys: M Key, B+M Key (NVMe)
- USB standard: USB 3.1 Gen2
- Backwards compatible with USB: 3.1/ 3.0 / 2.0 / 1.1
- Chipset: JMS583
- LED activity indicator:yes
- Housing: Aluminum
- Heat dissipation: passive
- Supports Plug & Play
- Power supply via USB connection
- Supports Win 11,10, 8, 7
- Supports: Android / iOS
- Supports macOS , Linux 2.4.x or higher, Google Chrome OS 9.x or higher
- Operating temperature: 5 to 50°C
- Storage temperature: -40 to 70°C
- Humidity during operation: 5 to 90% (non-condensed)
- Dimensions: 101x32x10 mm
- Weight: 97g
- Color: Pantone 430C
- USB-C products: yes

**Package contents**

- External SSD enclosure, M.2 - USB Type-C™
- USB cable (C - A), 25 cm
- USB A to C adapter
- QIG

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	50	5.00	48.00	39.50	17.00	32,232.00
Packaging Unit Inside	1	0.10	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.10	15.40	9.60	3.90	576.58
Net single without Packaging	0	0.16	12.90	1.30	5.10	85.53

More images:

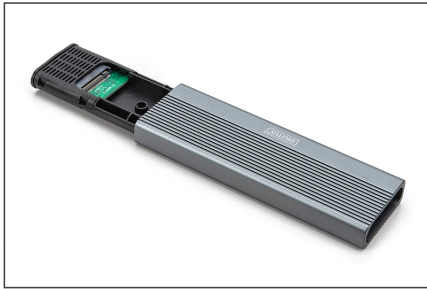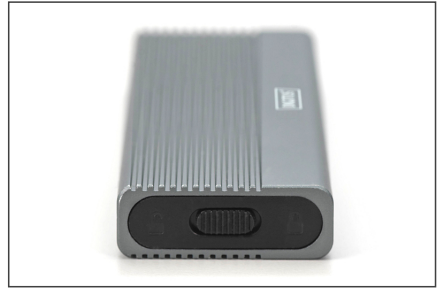

**DA-71120-1**  
USB Hard Disk Enclosure, External, NVMe, 10 Gbps  
USB 3.1 Gen2, Alu, Toolfree

- USB Version
- USB Standard
- Plug and Play
- 10 Gbps
- Drive Transfer rate
- Toolfree
- Operating Temperature

**DA-71120-1**  
USB Hard Disk Enclosure, External, NVMe, 10 Gbps  
USB 3.1 Gen2, Alu, Toolfree

Wide compatibility: Supports M.2 modules in 2280, 2242, 2260 and 2280 formats, compatible with a wide range of SSDs.

- Supports M.2 2280
- Supports M.2 2242
- Supports M.2 2260
- Supports M.2 2280

**DA-71120-1**  
USB Hard Disk Enclosure, External, NVMe, 10 Gbps  
USB 3.1 Gen2, Alu, Toolfree

Housing: Aluminum

Max. supported capacity: 8TB

**DA-71120-1**  
USB Hard Disk Enclosure, External, NVMe, 10 Gbps  
USB 3.1 Gen2, Alu, Toolfree

- Slide the push button and pull out the back flap.
- Remove the back mounting bracket. Put the back flap into the notch and lock the screw pin.
- Plug the M.2 SSD into the notch.
- Plug the M.2 SSD into the notch.

**DA-71120-1**  
USB Hard Disk Enclosure, External, NVMe, 10 Gbps  
USB 3.1 Gen2, Alu, Toolfree

- USB Version
- USB Standard
- Plug and Play
- 10 Gbps
- Drive Transfer rate
- Toolfree
- Operating Temperature

10 Gbps

Compatibility with Windows 11, 10, 8.1, 8, 7, macOS, Linux 6.4 or higher, Android OS 9.0 or higher

**DA-71120-1**  
USB Hard Disk Enclosure, External, NVMe, 10 Gbps  
USB 3.1 Gen2, Alu, Toolfree

- USB Version
- USB Standard
- Plug and Play
- 10 Gbps
- Drive Transfer rate
- Toolfree
- Operating Temperature

