

# DIGITUS DisplayPort Connection Cable

**AK-340100-030-S**  
**EAN 4016032288961**



**DisplayPort Connection Cable, Type DP M/M, 3.0m, w/interlock, UHD 4K, DP 1.2, bl**

This high performance HD digital audio and video cable for example is used to connect a PC or notebook with DisplayPort interface to a monitor with DisplayPort interface.


**Ideal for CAD/CAM, GIS, 3D modeling, real time simulation, and more.**

- Support up to 4K/2K with 60Hz
- Supported Video format: 4K (3840x2160) @ 60 Hz, Full HD (1920x1080) @ 120 Hz
- Supported transmission modes: RBR, HBR, HBR2
- Maximal bandwidth: 21,6 Gbps
- HBR-Version/transfer mode: HBR2 (5,40 Gbit/s per lane)
- HDCP-Version: HDCP 1.3
- Assortment: DisplayPort Cables

- AWG: 30
- Color cable: black
- Color connector: black
- Connector 1: DP, plug
- Connector 2: DP, plug
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.2
- Ferrite filter: none
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Interlock: Snap fastener
- Packaging: Polybag
- Wire material: CCS
- Length: 3 m
- AOC - Active Optical Cable: no
- Shielding: triple shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	50	8.30	44.00	31.00	22.00	30,008.00
Packaging Unit Inside	5	0.83	16.00	11.00	16.00	2,816.00
Packaging Unit Single	1	0.17	16.00	2.50	15.00	600.00
Net single without Packaging	1	0.16	16.00	2.50	15.00	600.00

**More images:**

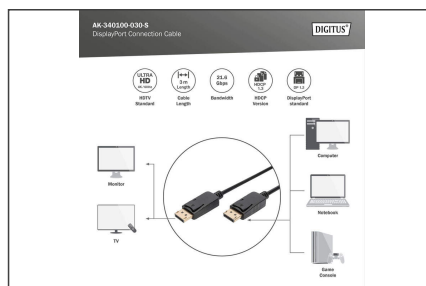

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product specifications for the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)