

# DIGITUS mini GBIC (SFP) Module, 1.25 Gbps, 20km

DN-81001  
EAN 4016032305668



## 1.25 Gbps SFP Module, Singlemode LC Duplex Connector, 1310nm, up to 20km

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Whether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

### The plug and play fiber connection

- Mini GBIC SFP (Small Form Factor Pluggable) module
- Compatible with the following manufacturers: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon, Intelinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE
- High quality and excellent reliability
- 1.25 Gbps Maximum Data Rate
- Compliant to IEEE 802.3z Gigabit Standard
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant



- Hot pluggable
- Connector: 1x LC Duplex
- 1000Base-LX - For Long Haul
- Wavelength: 1310nm
- Transmission power: minimum -8 dBm, maximum -3 dBm
- Sensitivity receiving power: minimum -24 dBm
- For a Distance of up to 20km
- Suitable for 09/125µm Singlemode Fiber Cables
- Safe fast-locking mechanism
- 3.3V power supply
- Operating temperature: 0 °C ~ 70 °C
- Mode: Singlemode
- Connector: LC
- Distance (km): 20
- Wavelength: 1310 nm
- DDM Support: no
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: Universal (MSA), Cisco
- Ethernet speed: Gigabit

### Package contents

- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	240	8.50	50.00	29.00	54.50	79,025.00
Packaging Unit Inside	30	1.06	7.00	20.00	30.00	4,200.00
Packaging Unit Single	1	0.04	9.00	12.00	3.00	324.00
Net single without Packaging	1	0.02	9.00	12.00	3.00	324.00

More images:

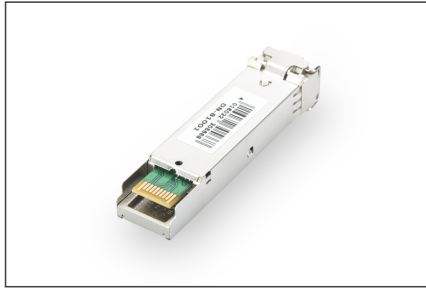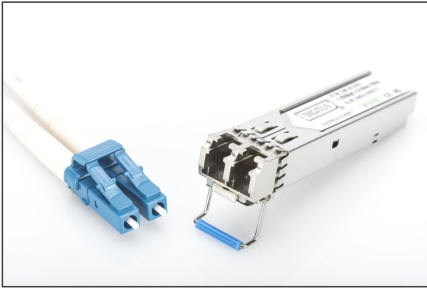

Product Number	EMC Code	Speed	Distance	Connector	Wavelength	Operating Temperature	Industrial Version
<b>Full Duplex</b>							
Dsh-F00	40100020400	10 Gbps	2 km	LC Multimode Duplex	1310nm	0 to 70 °C	
Dsh-F02	40100020700	10 Gbps	200m	LC Singlemode Duplex	750nm/1310nm	0 to 70 °C	
Dsh-F04	40100020700	10 Gbps	200m	LC Singlemode Duplex	750nm/1310nm	0 to 70 °C	
<b>Signal</b>							
Dsh-F08	40100020800	10 Gbps	200m	LC Multimode Duplex	850nm	0 to 70 °C	
Dsh-F09	40100020800	10 Gbps	200m	LC Singlemode Duplex	850nm	0 to 70 °C	
Dsh-F10	40100020800	10 Gbps	200m	LC Singlemode Duplex	750nm/1310nm	0 to 70 °C	
Dsh-F12	40100020800	10 Gbps	200m	LC Singlemode Duplex	750nm/1310nm	0 to 70 °C	
Dsh-F14	40100020800	10 Gbps	200m	LC Singlemode Duplex	1550nm	0 to 70 °C	
<b>RS</b>							
Dsh-R00	40100020100	10 Gbps	200m	LC Multimode Duplex	850nm	0 to 70 °C	
Dsh-R02	40100020100	10 Gbps	200m	LC Singlemode Duplex	1310nm	0 to 70 °C	
<b>Full Duplex</b>							
Dsh-F15	40100020700	10 Gbps	200m	LC Singlemode Duplex	750nm/1310nm	-40 to 85 °C	✓
Dsh-F16	40100020700	10 Gbps	200m	LC Singlemode Duplex	750nm/1310nm	-40 to 85 °C	✓
Dsh-F18	40100020700	10 Gbps	200m	LC Multimode Duplex	850nm	-40 to 85 °C	✓
Dsh-F19	40100020700	10 Gbps	200m	LC Singlemode Duplex	1310nm	-40 to 85 °C	✓
Dsh-F20	40100020700	10 Gbps	200m	LC Singlemode Duplex	1550nm	-40 to 85 °C	✓
Dsh-F22	40100020800	10 Gbps	200m	LC Singlemode Duplex	750nm/1310nm	-40 to 85 °C	✓
Dsh-F24	40100020700	10 Gbps	200m	LC Singlemode Duplex	750nm/1310nm	-40 to 85 °C	✓