


DIGITUS Cat.7 S/FTP burial installation cable, 1000 m, simplex, PE

DK-1741-VH-10-OD
EAN 4016032354130

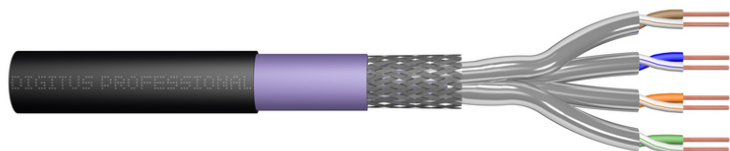

CAT 7 S-FTP outdoor installation cable, 1200 MHz PE, inner Eca (LSZH), AWG 23/1, 1000m, sx, bl&pu

The Digitus® Professional Cat.7 S/FTP burial installation cable is characterized by the following cable construction 4x2x AWG23/1 and reaches a transmission frequency up to 1200 MHz. The cable has a PE outer jacket and a halogen free inner jacket and is conform to the standard IEC 60332-1, FRNC-B, LSZH-1 and CPR Euro class Eca. The cable is suitable for installations in dry or wet areas, outdoor or ground. Compliant with the following standards ISO/IEC 11801, DIN EN 50173, DIN EN 50288-4-1.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare annealed copper, solid AWG 23/1
- Insulation: SFS-PE (Foam-Skin Polyethylene)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shielding: Aluminum foil, providing 100 % coverage
- Overall shielding: Copper wire braid
- Outer sheath: PE (Polyethylene); UV resistant
- Outer sheath diameter (nominal): 0.50 mm nominal
- Outer sheath color: Black (RAL 9005)
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Shipping- and storage temperature range: -20 °C up to +60 °C

- Operating temperature range: -50 °C up to +60 °C
- Installation temperature range: 0 °C up to +60 °C
- Overall diameter Simplex (nominal): 8.5 mm nominal (Eca)
- Weight (kg/km): 66.5 kg/km
- Electrical properties:
- Impedance: 100±5 Ohm @ 4-100 MHz; 100±25 Ohm @ 100-1200 MHz
- Capacitance: 45 pF/m nominal @ 1 KHz
- Capacitance unbalance (pair-ground): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC resistance: 95 Ohm/km max. (2% max. resistance unbalance)
- DC loop resistance: 190 Ohm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: CA-Type 1b
- Signal propagation delay: 450 nS/100 m max.
- Delay difference: 10 nS/100 m max.
- Separating class: "d" acc. to EN 50174-2
- NVP: 79%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Eca
- Length: 1000 m
- Color: black
- Jacket: PE
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	66.00	60.00	60.00	33.00	118,800.00
Packaging Unit Inside	1	66.00	60.00	60.00	33.00	118,800.00
Packaging Unit Single	1	66.00	60.00	60.00	33.00	118,800.00
Net single without Packaging	1	65.59	60.00	60.00	33.00	118,800.00

More images:




CAT 7 S/FTP Burial Installation Cable, 1000 m, Simplex, PE

- AWG 23/1
- 1200 MHz Transmission
- 10 Gbit Ethernet
- CAT 7 Class
- 50°/±60° TCS
- LSZH
- E CCA GPR class

DK-1741-VH-10-00 // CAT 7 S/FTP Burial Installation Cable, 1000m, Simplex, PE

Anwendungsbeispiel
Example of use

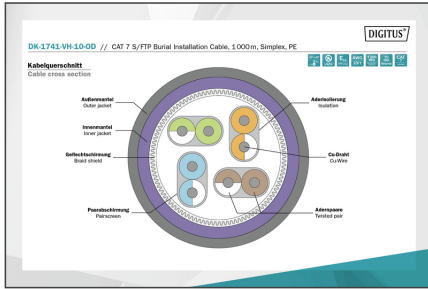

Technische Spezifikationen Product Information

Bezeichnung	DK-1741-VH-10-00	Teilenummer	DK-1741-VH-10-00
Hersteller	ASSMANN Electronic GmbH	Produktionsjahr	2023
Material	PE	Material	PE

Technische Spezifikationen Physical Properties

Lebensdauer	10 Jahre	Temperaturbereich	-40°C bis +85°C
Flammverhalten	LSZH	Flammverhalten	LSZH
Wärmeleitfähigkeit	0,35 W/mK	Wärmeleitfähigkeit	0,35 W/mK

Technische Spezifikationen Mechanical Properties

Lebensdauer	10 Jahre	Temperaturbereich	-40°C bis +85°C
Flammverhalten	LSZH	Flammverhalten	LSZH
Wärmeleitfähigkeit	0,35 W/mK	Wärmeleitfähigkeit	0,35 W/mK

Leistungseigenschaften Transmission Properties

AWG	STP	MDR	PL200	30A	PL40A	PL	PL200	PL40A
1	1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5	5
6	6	6	6	6	6	6	6	6
7	7	7	7	7	7	7	7	7
8	8	8	8	8	8	8	8	8
9	9	9	9	9	9	9	9	9
10	10	10	10	10	10	10	10	10



GHMT Zertifikat

C_{CA}	s1a	d1	a1
-----------------------	------------	-----------	-----------

Produktbeschreibung
Produktbeschreibung

Leistungseigenschaften
Leistungseigenschaften



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based electronic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com