


DIGITUS Cat.7 S/FTP burial installation cable, 1000 m, simplex, PE

DK-1741-VH-10-OD
EAN 4016032354130

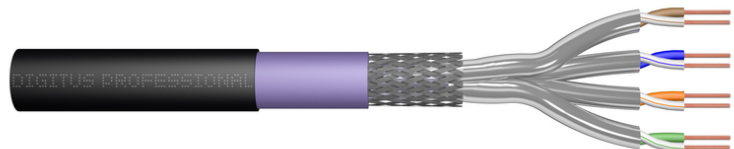

CAT 7 S-FTP outdoor installation cable, 1200 MHz PE, inner Eca (LSZH), AWG 23/1, 1000m, Sx, bl&pu

The Digitus® Professional Cat.7 S/FTP burial installation cable is characterized by the following cable construction 4x2x AWG23/1 and reaches a transmission frequency up to 1200 MHz. The cable has a PE outer jacket and a halogen free inner jacket and is conform to the standard IEC 60332-1, FRNC-B, LSZH-1 and CPR Euro class Eca. The cable is suitable for installations in dry or wet areas, outdoor or ground. Compliant with the following standards ISO/IEC 11801, DIN EN 50173, DIN EN 50288-4-1.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare annealed copper, solid AWG 23/1
- Insulation: SFS-PE (Foam-Skin Polyethylene)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shielding: Aluminum foil, providing 100 % coverage
- Overall shielding: Copper wire braid
- Outer sheath: PE (Polyethylene); UV resistant
- Outer sheath diameter (nominal): 0.50 mm nominal
- Outer sheath color: Black (RAL 9005)
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Shipping- and storage temperature range: -20 °C up to +60 °C
- Operating temperature range: -50 °C up to +60 °C

- Installation temperature range: 0 °C up to +60 °C
- Overall diameter Simplex (nominal): 8.5 mm nominal (Eca)
- Weight (kg/km): 66.5 kg/km
- Electrical properties:
- Impedance: 100±5 Ohm @ 4-100 MHz; 100±25 Ohm @ 100-1200 MHz
- Capacitance: 45 pF/m nominal @ 1 KHz
- Capacitance unbalance (pair-ground): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC resistance: 95 Ohm/km max. (2% max. resistance unbalance)
- DC loop resistance: 190 Ohm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: CA-Type 1b
- Signal propagation delay: 450 nS/100 m max.
- Delay difference: 10 nS/100 m max.
- Separating class: "d" acc. to EN 50174-2
- NVP: 79%



Attributes

- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Eca
- Length: 1000 m
- Color: black
- Jacket: PE
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	66.00	60.00	60.00	33.00	118,800.00
Packaging Unit Inside	1	66.00	60.00	60.00	33.00	118,800.00
Packaging Unit Single	1	66.00	60.00	60.00	33.00	118,800.00
Net single without Packaging	1	65.59	60.00	60.00	33.00	118,800.00

More images:

DIGITUS	
Produktionsdaten / Product Information	Physikalische Spezifikationen / Physical Properties
<p>Produktname: CAT 7 S/FTP Burial Installation Cable, 1000m, Simplex, PE</p> <p>Artikelnummer: DK-1741-VH-10-00</p> <p>Hersteller: ASSMANN Electronic GmbH</p> <p>Produkttyp: CAT 7 S/FTP Burial Installation Cable, 1000m, Simplex, PE</p>	<p>Material: PE (Polyethylene)</p> <p>Lebensdauer: 100 Jahre</p> <p>Temperaturbereich: -40°C bis +70°C</p> <p>Wasserbeständigkeit: Ja</p> <p>UV-Strahlung: Ja</p> <p>Chemikalien: Ja</p> <p>Flammverhalten: LSZH (Low Smoke Zero Halogen)</p> <p>Wegmarkierung: Ja</p> <p>Lebensdauer: 100 Jahre</p> <p>Temperaturbereich: -40°C bis +70°C</p> <p>Wasserbeständigkeit: Ja</p> <p>UV-Strahlung: Ja</p> <p>Chemikalien: Ja</p> <p>Flammverhalten: LSZH (Low Smoke Zero Halogen)</p> <p>Wegmarkierung: Ja</p>

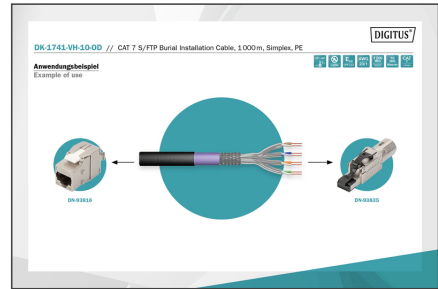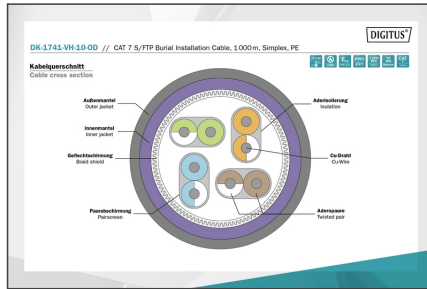

CAT 7 S/FTP Burial Installation Cable, 1000m, Simplex, PE

DIGITUS																																																																																																																																
Mechanische Eigenschaften / Mechanical Properties	Leistungseigenschaften / Transmission Properties																																																																																																																															
<p>Lebensdauer: 100 Jahre</p> <p>Temperaturbereich: -40°C bis +70°C</p> <p>Wasserbeständigkeit: Ja</p> <p>UV-Strahlung: Ja</p> <p>Chemikalien: Ja</p> <p>Flammverhalten: LSZH (Low Smoke Zero Halogen)</p> <p>Wegmarkierung: Ja</p>	<table border="1"> <thead> <tr> <th>Stärke</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> <th>7</th> <th>8</th> <th>9</th> <th>10</th> <th>11</th> <th>12</th> <th>13</th> <th>14</th> <th>15</th> <th>16</th> <th>17</th> <th>18</th> <th>19</th> <th>20</th> <th>21</th> <th>22</th> <th>23</th> <th>24</th> <th>25</th> <th>26</th> <th>27</th> <th>28</th> <th>29</th> <th>30</th> <th>31</th> <th>32</th> <th>33</th> <th>34</th> <th>35</th> <th>36</th> <th>37</th> <th>38</th> <th>39</th> <th>40</th> <th>41</th> <th>42</th> <th>43</th> <th>44</th> <th>45</th> <th>46</th> <th>47</th> <th>48</th> <th>49</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>AWG</td> <td>24</td> <td>23</td> <td>22</td> <td>21</td> <td>20</td> <td>19</td> <td>18</td> <td>17</td> <td>16</td> <td>15</td> <td>14</td> <td>13</td> <td>12</td> <td>11</td> <td>10</td> <td>9</td> <td>8</td> <td>7</td> <td>6</td> <td>5</td> <td>4</td> <td>3</td> <td>2</td> <td>1</td> <td>0</td> <td>1</td> <td>2</td> <td>3</td> <td>4</td> <td>5</td> <td>6</td> <td>7</td> <td>8</td> <td>9</td> <td>10</td> <td>11</td> <td>12</td> <td>13</td> <td>14</td> <td>15</td> <td>16</td> <td>17</td> <td>18</td> <td>19</td> <td>20</td> <td>21</td> <td>22</td> <td>23</td> <td>24</td> <td>25</td> <td>26</td> <td>27</td> <td>28</td> <td>29</td> <td>30</td> <td>31</td> <td>32</td> <td>33</td> <td>34</td> <td>35</td> <td>36</td> <td>37</td> <td>38</td> <td>39</td> <td>40</td> <td>41</td> <td>42</td> <td>43</td> <td>44</td> <td>45</td> <td>46</td> <td>47</td> <td>48</td> <td>49</td> <td>50</td> </tr> </tbody> </table>	Stärke	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	AWG	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
Stärke	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50																																																																														
AWG	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50																																																					



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.
 ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com