

# DIGITUS Gigabit SFP PCI Express Card

**DN-10160**  
**EAN 4016032392019**



**SFP Gigabit Ethernet PCI Express Card 32-bit, low profile bracket, Intel WG1210 chipset**

With the Digitus Gigabit PCI Express Fiber Optic Network Card, you can connect a PCI Express-based desktop or rack mount PC directly to a fiber optic network using the Gigabit SFP of your choice

**Use modern Fiber technology to connect your PC with the Network**

- Supports Full/Half-duplex Auto-Negotiation, Auto-MDI/MDIX
- Supports IEEE 802.1Q VLAN tagging
- Supports 1000 Mbps networks with automatic detection and setting
- Layer 2 functions: IEEE 802.3x Flow Control - IEEE 802.1Q VLAN


- SFP slot supporting the following transceivers: MiniGBiC 1000SX Multimode, 1000LX Singlemode, 1000BX Singlemode WDM
- Intel-Chipsatz - ensures a stable and efficient quality
- Integrated Heat Sink for stabilizing the SFP temperature
- Supports IPv4, IPv6 protocols
- Supports Jumbo Frames up to 9K
- Supports Windows 10, 8.1, 8, 7, Vista, XP, Mac OS X and Linux
- Operating temperature: 0°C - 55°C
- Weight: 40g

**Package contents**

- Gigabit SFP PCI Express Card
- Manual
- Support CD-ROM
- Low profile bracket

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	40	3.40	39.00	41.00	41.00	65,559.00
Packaging Unit Inside	1	0.09	20.00	19.00	5.50	2,090.00
Packaging Unit Single	1	0.09	20.00	19.00	5.50	2,090.00
Net single without Packaging	1	0.04	20.00	19.00	5.50	2,090.00

**More images:**

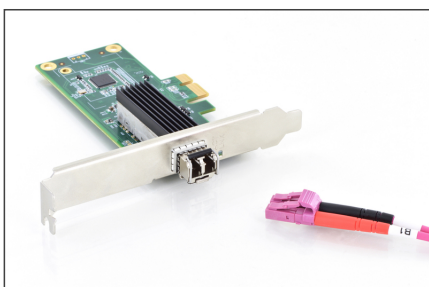

**Safety notes**

- Switch off the computer completely and disconnect it from the power supply before installing or removing the network card.
- Static discharge can damage the product or the PC. Take measures against static discharge (ESD) when installing the product, e.g. wear an antistatic wrist strap.
- Before installation, touch the metal surface of the PC housing or another grounded object to ground any ESD charge via the housing.
- Avoid using too much force when connecting the product to the PC.
- Please ensure that any cables are connected correctly without overstretching or damaging them.
- Avoid touching the contacts of the product with your fingers to prevent corrosion or static charge.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)