


DIGITUS Modular Patch Panel V-Design

DN-91414S
EAN 4016032435587

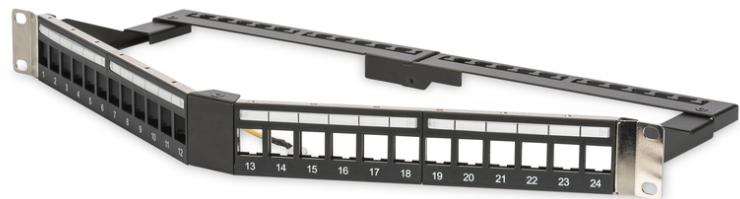

Triangled Modular Patch Panel, shielded 24-port, label field, 1U, rack mount, bl RAL 9005

The DIGITUS® Professional Triangel 24-port Patch Panel offers a perfect solution for high density applications. As the panel is angled you can manage the patch cords easy from both sides, so there is a better cable management inside of the Rack.

- Area of application: 483 mm (19") cabinet
- Norms: ISO/IEC 11801 3rd Ed., EN 50173-1, EIA/TIA 568-C
- General properties:
- Suitable for shielded and unshielded keystone modules
- Central ground connection
- Technical properties:


- Housing material: 1.5 mm SPCC cold rolled stell sheet, powder-coated
- Material standard: EN 10 130(1991), BS 1449, NFA 36/401, DIN 1623, UNI 5866, UNE 36-086, SIS, JIS G 3141, ASTM, SAE, NFA 36/401
- Physical properties:
- Operation temperature: -20° C to +70 °C (ISO/IEC 11801, EN 50173-1, ANSI/TIA/EIA 568 C)

Attributes

- Color: black, RAL 9005
- Ports: 24
- Units: 1

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	25	18.40	48.00	30.00	32.00	46,080.00
Packaging Unit Inside	1	0.74	9.50	27.50	5.50	1,436.88
Packaging Unit Single	1	0.74	9.50	27.50	5.50	1,436.88
Net single without Packaging	1	0.64	9.50	27.50	5.50	1,436.88

More images:

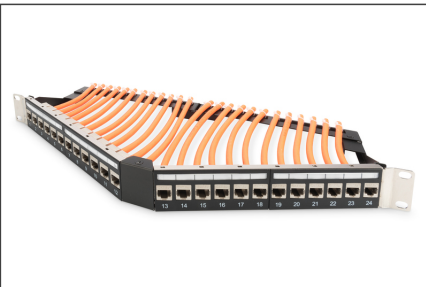

Safety notes

- Protect product from moisture

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com