

DIGITUS Cat.6A U/FTP installation cable, 100 m, simplex, B2ca

DK-1626-A-VH-1
EAN 4016032441823



CAT 6A U-FTP installation cable, 500 MHz B2ca (EN 50575), AWG 23/1, 100 m paper box,

The Digitus® Cat.6A U/FTP installation cable is characterized by the following cable construction 4x2x AWG23/1 and reaches a transmission frequency up to 500 MHz. The halogen free cable jacket is conform to the standard IEC 60332-1, FRNC-B, LSZH-1 and CPR Euro class B2ca. The cable is suitable for building structured cabling in the secondary and tertiary area. Compliant with the following standards ISO/IEC 11801, DIN EN 50173, DIN EN 50288-10-1.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare annealed copper, solid AWG 23/1
- System/s of AVCP: AVCP 3
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shielding: Aluminum foil, providing 100 % coverage
- Overall shielding: None, with drain wire
- Outer sheath: Eca to B2ca acc. to EN 50575; LSZH
- Outer sheath color: Light blue (RAL 5012)
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Shipping- and storage temperature range: -20 °C up to +60 °C
- Operating temperature range: -20 °C up to +75 °C

- Installation temperature range: 0 °C up to +50 °C
- Overall diameter Simplex (nominal): 7.0 (Eca); 7,2 mm (Dca); 7,6 mm (Cca); 7,6 mm (B2ca)
- Weight (kg/km): 56 kg (Eca); 57 kg (Dca); 58 kg (Cca); 58 kg (B2ca)
- Electrical properties:
- Impedance: 100±15 Ohm @ 4 - 100MHz; 100±25 Ohm @100-500 MHz
- Capacitance: 45 pF/m nominal @ 1 KHz
- Capacitance unbalance (pair-ground): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC loop resistance: 190 Ohm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: CA-Type 2
- Signal propagation delay: 450 nS/100 m max.
- Propagation delay: 15 nS/100 m max.
- Separating class: "c" acc. to EN 50174-2
- NVP: 70%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 6A
- Shielding: U-FTP, pairs in metal foil
- CPR: B2ca
- Length: 100 m
- Color: light-blue
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	0.00	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.00	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.00	0.00	0.00	0.00	0.00
Net single without Packaging	1	-0.30	0.00	0.00	0.00	0.00

More images:




DIGITUS

CPR-Symbol
 B2ca
 Cca
 Dca
 Eca

Brandmark
 Cca s1a d1 a1

Digitus
 1+
 3

Digitus
 s
 d
 a

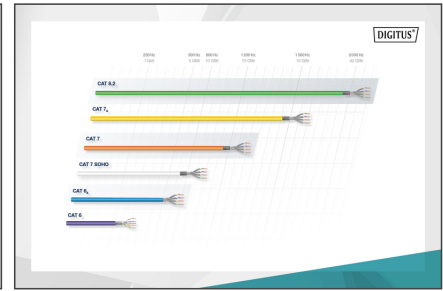

GHMT

Certificate
 No. 16884-21

Zertifikat
 Nr. 16884-21

Category 6e

Category 6e

GHMT Type Approval

Intertek

ETL Veritas Certificate of Conformance Number: 111422282CPT-011

Intertek

Intertek



DIGITUS

Leistungsparameter Transmissionsparameter

PROB	UNIT	TEST	PERIOD	ASR	PS ASR	SL	EXTENT	PERIOD
1	dB	10	10	10	10	10	10	10
2	dB	10	10	10	10	10	10	10
3	dB	10	10	10	10	10	10	10
4	dB	10	10	10	10	10	10	10
5	dB	10	10	10	10	10	10	10
6	dB	10	10	10	10	10	10	10
7	dB	10	10	10	10	10	10	10
8	dB	10	10	10	10	10	10	10
9	dB	10	10	10	10	10	10	10
10	dB	10	10	10	10	10	10	10

DIGITUS

Produktdaten	Physikalische Spezifikationen/Physical Properties
Produktname	DK-1623-A-VH-1
Produktbeschreibung	100m, Simplex, Eca
Material	...
Abmessungen	...
Wichtige Eigenschaften	...
Technische Spezifikationen	...

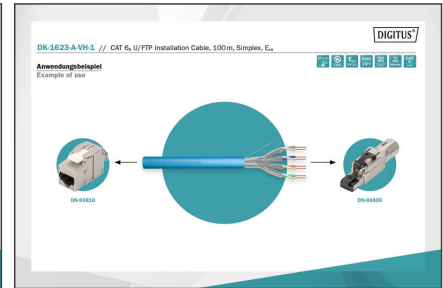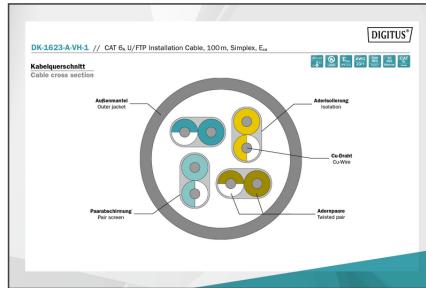

DIGITUS

AWG 23/1

500 MHz

10 Gbit Ethernet

CAT 6a

Eca

LSZH

CPR class

CAT 6a U/FTP Installation Cable, 100 m, Simplex, Eca

