

DIGITUS CAT 6 U/UTP installation cable, 500 m, Dca

DK-1614-VH-5
EAN 4016032442141



CAT 6 U-UTP installation cable, 250 MHz Dca (EN 50575), AWG 23/1, 500m drum, Sx, purple

The Digitus Cat 6 U/UTP installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-6-1, DIN EN 50173, IEC 60332-1. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE and POE+.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare annealed copper, solid AWG 23/1
- System/s of AVCP: AVCP 3
- Insulation: HD-PE (High Density Polyethylene)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shield: None
- Overall shielding: None
- Outer sheath: Eca to B2ca acc. to EN 50575; LSZH
- Outer sheath diameter (nominal): 0,5 mm (Eca); 0,6 mm (Dca); 1,0 mm (Cca); 1,0 mm (B2ca)
- Outer sheath color: Purple (RAL 4005)
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Shipping- and storage temperature range: -20 °C up to +60 °C
- Operating temperature range: -20 °C up to +75 °C


- Installation temperature range: 0 °C up to +50 °C
- Overall diameter Simplex (nominal): 6,1 mm (Eca); 6,3 mm (Dca); 6,8 mm (Cca); 6,8 mm (B2ca)
- Weight (kg/km): 41 kg (Eca); 42 kg (Dca); 44 kg (Cca); 44 kg (B2ca)
- Electrical properties:
- Impedance: 100±50Ω @ 1 - 250MHz
- Capacitance: 40 pF/m nominal @ 800 Hz
- Capacitance unbalance (pair-ground): 1.5 pF/m max. @ 1 KHz
- Insulation resistance: 5 GΩm x km min.
- DC loop resistance: 147 Ωm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: CA-Type 3
- Signal propagation delay: 535 nS/100 m max.
- Propagation delay: 20 nS/100 m max.
- Separating class: „b“ acc. to EN 50174-2
- NVP: 69%

Attributes

- Assortment: Twisted Pair Installation Cables
- Category: CAT 6
- Shielding: U-UTP, unshielded
- CPR: Dca
- Length: 500 m
- Color: violet
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	26.00	36.00	36.00	30.00	38,880.00
Packaging Unit Inside	1	26.00	36.00	36.00	30.00	38,880.00
Packaging Unit Single	1	26.00	36.00	36.00	30.00	38,880.00
Net single without Packaging	1	25.84	36.00	36.00	30.00	38,880.00

More images:

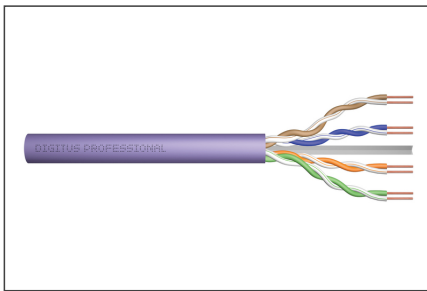


DIGITUS

B2ca Geflecht hoch
Cca Hoch
Dca Mittel
Eca Geflecht Low

1+
3

Cca **stA** **d1** **a1**

3 **5** **d** **a**

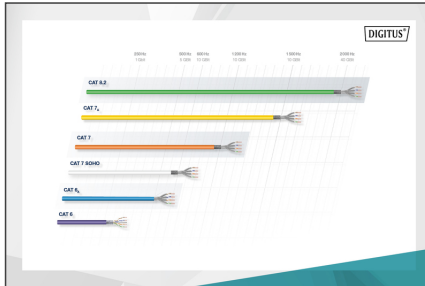

GHMT

Certificate No. 15517a-19-1

Zertifikat No. 15517a-19-1

Class E Klasse E

2 Connector Channel, Copper, Class E

GHMT Type Approval

3P PARTNER

Compliance Statement
Unshielded Class E / Category 6
ISO/IEC, EN & ANSI/ITA
Four Connector Channel

Intertek

ETL Verified Certificate of Conformance Number: 160120140207-011

Assessment Electronic GmbH
 48717 Am Schiller 3
 D-80333 Lohmühle, Germany

DIGITUS

Leistungsparameter Transmission Properties



10BASE-T	100BASE-TX	1000BASE-T	10GBASE-T	10GBASE-T	10GBASE-T	10GBASE-T	10GBASE-T
100	100	100	100	100	100	100	100
100	100	100	100	100	100	100	100
100	100	100	100	100	100	100	100
100	100	100	100	100	100	100	100
100	100	100	100	100	100	100	100
100	100	100	100	100	100	100	100
100	100	100	100	100	100	100	100
100	100	100	100	100	100	100	100
100	100	100	100	100	100	100	100
100	100	100	100	100	100	100	100

DIGITUS

Produktionsdaten Product Information

Physikalische Spezifikationen Physical Properties

Mechanische Spezifikationen Mechanical Properties

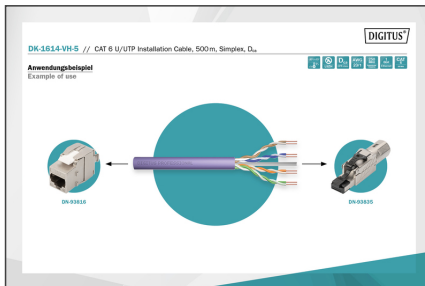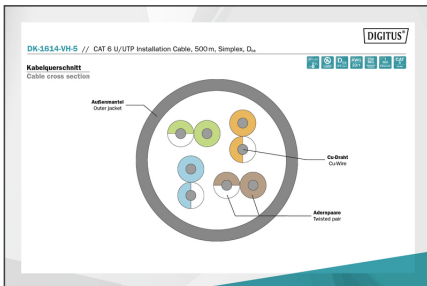

DIGITUS

CAT 6 U/UTP Installation Cable, 500m, Simplex, Dca

AWG 23/1
 250 MHz
 1 Gbit Ethernet
 CAT 6 100 mts
 20°/-75°
 6
 LSZH
 Dca CPR class



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com