

DIGITUS 1.25 Gbps copper SFP-module, RJ45

DN-81005-01
EAN 4016032454915



1.25 Gbps Copper SFP Module, RJ45, HP-compatible 10/100/1000Base-T, up to 100m, HP

The DIGITUS® Mini GBIC (SFP) transceiver modules offer the highest quality and reliability. The module offers a perfect opportunity for you to extend your Gigabit network switch with a free SFP Uplink Port around an additional RJ45 connection. Thanks to the hot-plug capability, you can install the module without any interruption to the network traffic or restart of the device. In addition, conformity with the MSA (Multi Source Agreement) standard provides compatibility with the current network switch manufacturers.

The plug and play extension for your network switch

- Mini GBIC SFP (Small Form Factor Pluggable) module
- Compatible with the following manufacturers: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE
- Up to 1.25 Gbps bidirectional maximum data rate


- Compliant to IEEE 802.3z Gigabit Standard
- High quality and excellent reliability
- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant
- Hot pluggable - installation possible while in operation
- Auto MDI/MDI-X
- Connection: 1x RJ45, CAT 5
- Distance: up to 100 m
- Operating temperature: 0 °C ~ 70 °C
- Mode: Copper
- Connector: RJ45
- Distance (km): 0.1
- DDM Support: no
- Manufacturer compatibility: HP, Universal (MSA)
- Ethernet speed: Gigabit

Package contents

- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	120	7.00	25.40	39.40	55.00	55,041.80
Packaging Unit Inside	30	1.75	7.00	20.00	30.00	4,200.00
Packaging Unit Single	1	0.06	3.20	9.30	12.00	357.12
Net single without Packaging	1	0.04	3.20	9.30	12.00	357.12

More images:

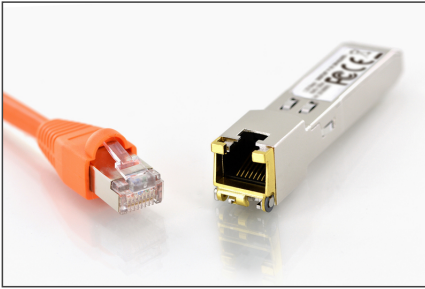

SFP Modules							
Product Number	MM Code	Speed	Distance	Connector	Mounting	Operating Temperature	Industrial Version
Fast Ethernet							
DM-0101	42780000040	100 Mbps	2 km	LC Multimode Duplex	191mm	0 to +70 °C	✓
DM-0102	42780000070	100 Mbps	550 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-0104	42780000070	100 Mbps	550 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
10G Ethernet							
DM-0105	42780000081	10 Gbps	550 m	LC Multimode Duplex	191mm	0 to +70 °C	✓
DM-0106	42780000082	10 Gbps	200 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-0107	42780000083	10 Gbps	200 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-0108	42780000084	10 Gbps	200 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-0109	42780000085	10 Gbps	200 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-0110	42780000086	10 Gbps	200 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-0111	42780000087	10 Gbps	200 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-0112	42780000088	10 Gbps	200 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-0113	42780000089	10 Gbps	200 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-0114	42780000090	10 Gbps	200 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-0115	42780000091	10 Gbps	200 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-0116	42780000092	10 Gbps	200 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-0117	42780000093	10 Gbps	200 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-0118	42780000094	10 Gbps	200 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-0119	42780000095	10 Gbps	200 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-0120	42780000096	10 Gbps	200 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-0121	42780000097	10 Gbps	200 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-0122	42780000098	10 Gbps	200 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-0123	42780000099	10 Gbps	200 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓
DM-0124	42780000100	10 Gbps	200 m	LC Singlemode Duplex	191mm	0 to +70 °C	✓