

# DIGITUS Universal Dual Monitor Mount with Gas Spring and Clamp Mount

DA-90395  
EAN 4016032465126



**Dual Gas Spring Monitor Clamp Mount 15-32", 2x 9 kg (max.), black**

With the universal dual monitor mount from DIGITUS®, you can conveniently attach two monitors with dimensions between 15" - 32" to your desk using a clamp mount. The quick release function also makes it easier for you to install the monitors. The VESA bracket is simply inserted into the corresponding mount and automatically snaps in. Without a great deal of effort, you can arrange the monitors according to your needs and pivot, incline or rotate the monitors, for instance for monitors in portrait mode. Support of the integrated gas spring facilitates height adjustment of your monitors. Do a good deed for yourself and your health by adjusting your monitor optimally for your body and your sitting position. The monitor cables can be stored in an orderly fashion using the cable routing included in delivery.

**The dual monitor mount allows you to individually arrange two monitors from 15" - 32". The monitors can be swiveled, inclined and rotated - with integrated gas spring for easy height adjustment and quick release function.**

- Suitable for monitors with dimensions between 15" and 32"
- Maximum load capacity: 9 kg per monitor arm
- Quick release function: Simple clipping in of the monitor in the mount

- Rotation of the VESA bracket: 180°
- Inclination of the VESA bracket: 180°
- Rotation of the VESA bracket: 180°
- Supports VESA dimensions: 75 x 75, 100 x 100
- Maximum height adjustment: 33.5 cm
- For tabletop thicknesses between: 10 - 85 mm
- Material: Aluminum, plastic, steel
- Dimensions: H 69 x W 104.8 x D 13.1 cm
- Weight of the bracket: 5.7 kg
- Color: Black, matte

**Attributes**


- Monitor weight (max.): 9 kg
- Mounting method: Clamp-mount
- Number of monitors: 2
- Size of monitors: up to 32"
- VESA mount: 75x75 mm, 100x100 mm

**Package contents**

- Universal Dual Monitor Mount with Gas Spring and Clamp Mount
- Mounting accessories
- Installation instruction

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	2	14.60	36.50	46.00	36.00	60,444.00
Packaging Unit Inside	1	7.30	17.10	35.10	44.40	26,649.30
Packaging Unit Single	1	7.30	17.10	35.10	44.40	26,649.30
Net single without Packaging	1	6.21	17.10	35.10	44.40	26,649.30

**More images:**

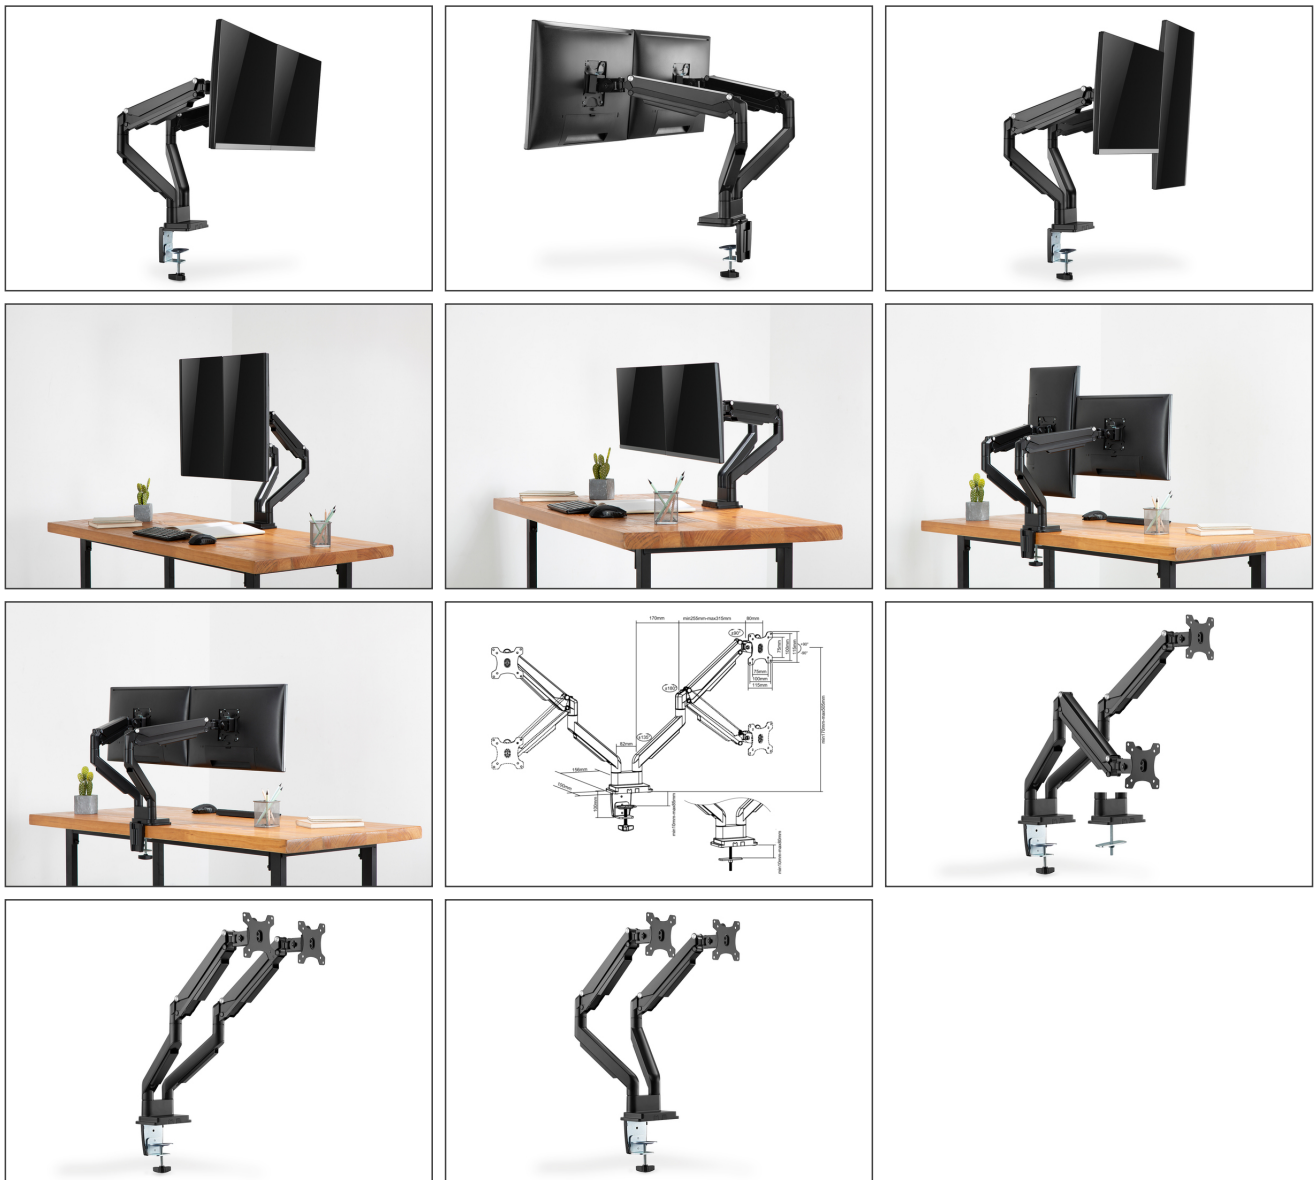

**Safety notes**

- Please read the entire manual before starting assembly and installation. Please contact your local dealer if you have any questions about the instructions or warnings.
- CAUTION: Use with products that exceed the permitted weight may result in damage or possible injury.
- Brackets should be fitted in accordance with the installation instructions. Incorrect installation can result in damage or injury.
- Use safety equipment and suitable tools. The product should only be installed by specialists.
- This product can be installed on timber-framed, solid concrete or stone walls.
- The load-bearing surfaces should be able to safely withstand the entire weight of appliances and all additional components.
- Only use the installation screws supplied and DO NOT TIGHTEN the screws TOO TIGHT.
- This product contains small parts that can cause a choking hazard if swallowed. Keep these parts away from children.
- Only use this product indoors. Using the product outdoors can lead to injuries and damage.
- IMPORTANT: Before installation, please compare all components received with the components list. If parts are damaged or missing, ask your local dealer for replacement parts.
- MAINTENANCE: Check the bracket regularly for safety and stability (preferably every three months).

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>

info@assmann.com