

# DIGITUS Audio Headset Adapter, 3.5 mm jack to 2x 3.5 mm socket

DB-510320-002-S  
EAN 4016032481324



**Stereo 3.5mm Headset Adapter, M to 2\*F Aluminum Housing ,Gold plated, NYLON Jacket 0,2m**


The Digitus Audio Headset Adapter comprises a 3.5 mm jack plug and two jack sockets. This adapter makes it possible to connect a headset with two 3.5 mm jack plugs (microphone + headphones) to your device (PC, notebook etc.) with a single 3.5 mm audio output. The microphone and headphone input are marked on the jacks.


**The Headset Adapter has two 3.5 mm connections for separate headphone and microphone connection and can be connected to the single/individual audio connection of a notebook.**

- Y distributor cable from 3.5 mm jack plug to 2x 3.5 mm jack (microphone + headphones)
- Aluminum housing
- Nylon mesh
- Gold-plated plug
- AWG: 28
- Color cable: black
- Connector 1: 3.5mm stereo plug
- Connector 2: 2x 3.5mm stereo jack
- Connector surface: gold-plated
- Length: 0.2 m
- Shielding: Double shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	120	4.08	34.00	43.00	41.00	59,942.00
Packaging Unit Inside	1	0.03	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.03	11.00	11.00	4.00	484.00
Net single without Packaging	1	0.01	11.00	11.00	4.00	484.00

More images:

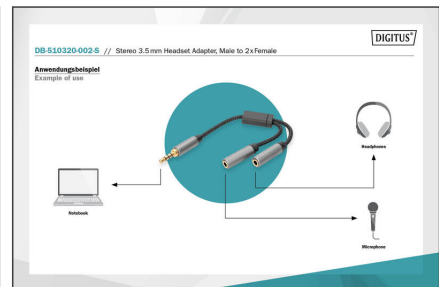

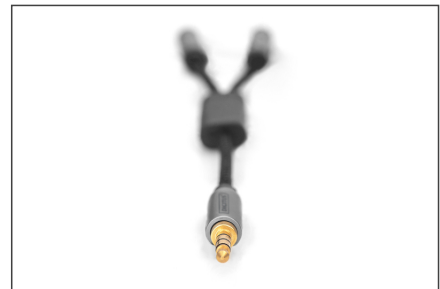

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)