

# DIGITUS Wall Mounting Cabinet SOHO PRO - 483 mm (19") - 540x400 mm (WxD)

DN-49207  
 EAN 4016032493761



**19" 12U wall mounting cabinet, SOHO PRO 595 x 540 x 400 mm, black**

Whether for private areas, office or sub-distribution units with limited space: With the compact 483 mm (19") solutions from the SOHO PRO series, you can install your network wherever you like. The wall housings available in four rack units (4 rack units, 7 rack units, 9 rack units, 12 rack units) are equipped with a full glass door as well as a cable entry in the roof and floor. A pair of galvanized 483 mm (19") profile rails labeled with easy-to-read rack units are installed on the inside. Their depth can be adjusted. Each cabinet features a robust steel design made of up to 1.5 mm thick sheet steel. Coloring is done with electrostatic powder coating in the standard colors gray (RAL 7035) or jet black (RAL 9005). The door hinges can be switched. The network are unassembled on delivery, in an optimized flat pack. Installation takes just a few steps and is extremely easy thanks to the step-by-step instructions included.

**The DIGITUS® Wall Housing SOHO PRO series is characterized by efficient delivery in an optimized flat pack as well as particularly user-friendly installation.**

- Protection class IP20
- Lockable safety glass door
- 200° door opening angle
- 1-point locking on the front door



- 483 mm (19") profile rails on the front, mounted on the front inside the cabinet, galvanized
- 483 mm (19") profile rails are adjustable in depth
- 1.1 - 1.5 thick sheet steel with high load capacity, powder-coated
- Cable entry with plastic cover in roof and floor
- Ventilation slits for active and passive ventilation
- Installation depth for components max.: 327 mm
- Product dimensions (H x W x D): 595 x 540 x 400 mm
- Cabinet type: Wall mounting cabinet
- Color: black, RAL 9005
- Depth: 400 mm
- Front door: Glass door, single opening
- Load capacity: 60 kg
- Side panels: Both sides
- Units: 12
- Width: 540 mm
- IP protection class: IP20
- Mounted: no

**Package contents**

- Installation set (screws, captive nuts, washers)
- 2x Keys
- 1x QIG

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	1	13.69	60.00	58.00	15.00	52,200.00
Packaging Unit Inside	1	13.69	60.00	58.00	15.00	52,200.00
Packaging Unit Single	1	13.69	60.00	58.00	15.00	52,200.00
Net single without Packaging	1	13.49	60.00	58.00	15.00	52,200.00

More images:

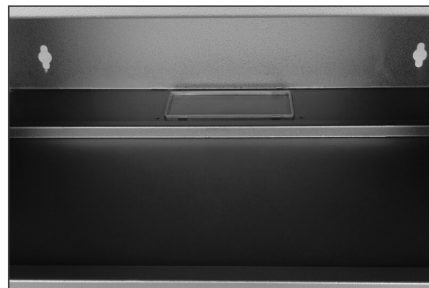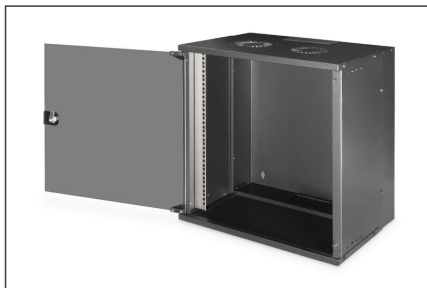

**DN-49207**  
Wall Mounting Cabinet 50x90 PRO  
483mm (13") - 540x400mm (WxD)

**DIGITUS**

- Slide the top panel onto the body in the direction of the arrow. Push upwards until the top panel is fully seated. Push the top panel down to the edge of the top panel to ensure it is seated correctly and the recesses of the top panel are exposed.
- Push the cabinet on the body into the lock position. Turn the handle clockwise and the recesses of the top panel are exposed.
- Slide the top panel into position to lock the cabinet. Turn the handle clockwise to lock the cabinet.

**DN-49207**  
Wall Mounting Cabinet 50x90 PRO  
483mm (13") - 540x400mm (WxD)

**DIGITUS**

- Slide the top panel out of the body.
- Open the handle lock panels of the body.
- Slide the bottom panel into the body in the direction of the arrow. At the bottom of the body, insert the recesses of the bottom panel into the top of the body.

Fix the bottom panel to the body by the screws. (2x) Note: The screws should be inserted into the recesses of the bottom panel. Please do not insert the screws into the body of the cabinet. Please do not insert the screws into the body of the cabinet.
- Close the body door and bottom panel to the body.