

# DIGITUS USB silicone cable, USB 10Gbps, 1m, black

AK-300342-010-S  
EAN 4016032496076



**USB Silicone connection cable, USB-C - USB-C 1m, USB 3.2 Gen2, 10G, 4K, 100W, black**

Fast charging and synchronization with the high-quality and soft silicone connection cable. 4K video transmission is possible with USB version 3.2 Gen2

**Fast charging and synchronization with the high-quality and soft silicone connection cable. 4K video transmission is possible with USB version 3.2 Gen2**

- Supports data transfer rates of 10 Gbps
- Backwards compatible with USB 3.1, USB 3.0, USB 2.0 and USB 1.1
- Supports the USB power delivery function with 20V, 5A and 100W
- Supports 4K (3840x2160) @60Hz



- Durable cable with a service life of up to 10,000 bends (based on internal tests)
- Type C plug can be used on both sides

**Attributes**

- Color cable: black
- Connector 1: USB C, plug
- Connector 2: USB C, plug
- Connector surface: nickel-plated
- Ferrite filter: none
- USB compliance: USB 3.0 / 3.1
- Length: 1 m
- Shielding: triple shielding

| Logistics                    |              |             |            |            |             |                 |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 150          | 6.26        | 21.00      | 32.00      | 50.00       | 33,600.00       |
| Packaging Unit Inside        | 10           | 0.42        | 5.00       | 35.00      | 35.00       | 6,125.00        |
| Packaging Unit Single        | 1            | 0.04        | 1.30       | 21.00      | 11.50       | 312.74          |
| Net single without Packaging | 1            | 0.03        | 1.30       | 21.00      | 11.50       | 312.74          |

**More images:**

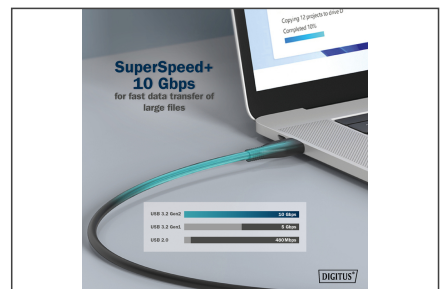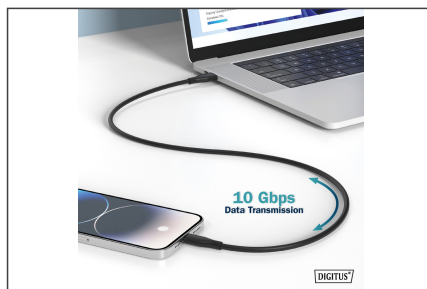



**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)