


DIGITUS CAT 8.2 S/FTP installation cable, 100 m, Simplex, Dca

DK-1843-VH-1
EAN 4016032476207

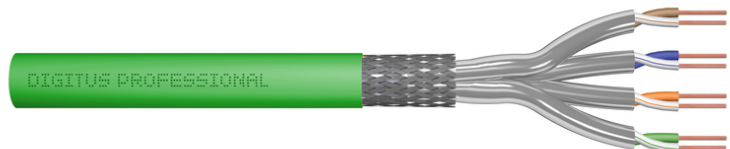

CAT 8.2 S-FTP install. cable, 2000 MHz, AWG 22/1 Dca, 100 m, ring, simplex, green

The DIGITUS® Professional CAT 8.2 S/FTP installation cable features the following cable structure 4x2x AWG22/1 and achieves a transmission frequency of up to 2000 MHz. The halogen-free cable sheath complies with the standards IEC 60332-3-24, FRNC-C, LSZH-3 and CPR Euro class DCA The cable is suitable for building cabling in secondary and tertiary areas. Complies with the following standards ISO/IEC 11801, DIN EN 50173, DIN EN 50288-12-1.

Future-oriented standards and high-end quality for your network

- Physical properties:
- Conductor: Bare annealed copper, solid AWG 22/1
- Insulation: SFS-PE (foamed polyethylene sheath)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: Aluminum-covered polyester film, 100% coverage
- Overall shielding: Tinned copper wire braid
- Outer sheath: Dca acc. to EN 50575; LSZH
- Outer sheath diameter (nominal): 0.55 mm nominal
- Outer sheath color: yellow
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Transport and storage temperature range: -20 °C to +75 °C





- Operating temperature range: -20 °C bis +60 °C
- Installation temperature range: 0 °C to +50 °C
- Overall diameter Simplex (nominal): 7.9 mm nominal (Dca)
- Weight (kg/km): 65 kg/km
- Electrical properties:
- Impedance: 100±15 Ohm @ 1 - 2000MHz
- Capacitance: 99 pF/30m nominal @ 1 KHz
- Capacitance unbalance (pair-ground): Is not specified
- Insulation resistance: 5 GOhm x km min.
- DC resistance: 2.4Ohm/30m max. (4% max. resistance unbalance)
- DC loop resistance: 5.6 Ohm/24m max. (3% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: CA-Type 1
- Signal propagation delay: 171 nS/30 m max.
- Propagation delay: 13,5 nS/130 m max.
- Separating class: „d“ acc. to EN 50174-2
- NVP: 79%
- Category: CAT 8.2
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Dca
- Length: 100 m
- Color: green
- Jacket: LSOH
- Structure: 4 x 2 AWG 22/1, solid twisted pair

Package contents

- CAT 8.2 S/FTP installation cable on drum, 100 m, Simplex, Dca


Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	6.00	29.00	29.00	17.00	14,297.00
Packaging Unit Inside	1	6.00	29.00	29.00	17.00	14,297.00
Packaging Unit Single	1	6.00	29.00	29.00	17.00	14,297.00
Net single without Packaging	1	6.00	29.00	29.00	17.00	0.00

More images:

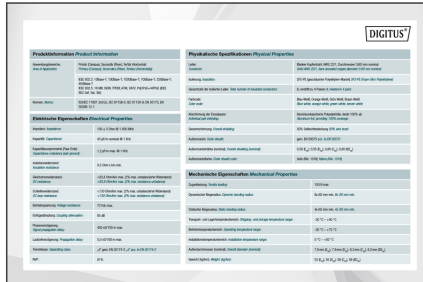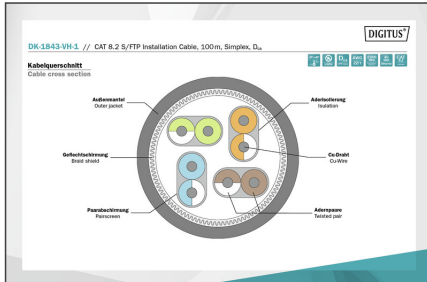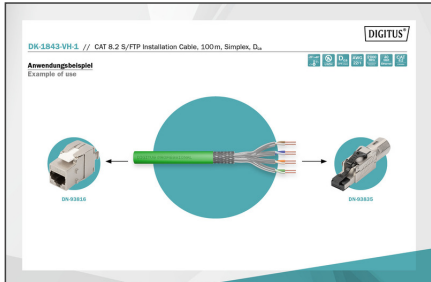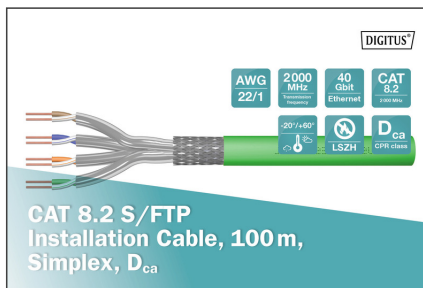

DK-1843-VH-1 // CAT 8.2 S/FTP Installation Cable, 100m, Simplex, D_{ca}

Stärke / Size	A	B	C	D	E	F	G	H
1	1	1	1	1	1	1	1	1
2	1	1	1	1	1	1	1	1
3	1	1	1	1	1	1	1	1
4	1	1	1	1	1	1	1	1
5	1	1	1	1	1	1	1	1
6	1	1	1	1	1	1	1	1
7	1	1	1	1	1	1	1	1
8	1	1	1	1	1	1	1	1
9	1	1	1	1	1	1	1	1
10	1	1	1	1	1	1	1	1
11	1	1	1	1	1	1	1	1
12	1	1	1	1	1	1	1	1
13	1	1	1	1	1	1	1	1
14	1	1	1	1	1	1	1	1
15	1	1	1	1	1	1	1	1
16	1	1	1	1	1	1	1	1
17	1	1	1	1	1	1	1	1
18	1	1	1	1	1	1	1	1
19	1	1	1	1	1	1	1	1
20	1	1	1	1	1	1	1	1
21	1	1	1	1	1	1	1	1
22	1	1	1	1	1	1	1	1
23	1	1	1	1	1	1	1	1
24	1	1	1	1	1	1	1	1
25	1	1	1	1	1	1	1	1
26	1	1	1	1	1	1	1	1
27	1	1	1	1	1	1	1	1
28	1	1	1	1	1	1	1	1
29	1	1	1	1	1	1	1	1
30	1	1	1	1	1	1	1	1
31	1	1	1	1	1	1	1	1
32	1	1	1	1	1	1	1	1
33	1	1	1	1	1	1	1	1
34	1	1	1	1	1	1	1	1
35	1	1	1	1	1	1	1	1
36	1	1	1	1	1	1	1	1
37	1	1	1	1	1	1	1	1
38	1	1	1	1	1	1	1	1
39	1	1	1	1	1	1	1	1
40	1	1	1	1	1	1	1	1
41	1	1	1	1	1	1	1	1
42	1	1	1	1	1	1	1	1
43	1	1	1	1	1	1	1	1
44	1	1	1	1	1	1	1	1
45	1	1	1	1	1	1	1	1
46	1	1	1	1	1	1	1	1
47	1	1	1	1	1	1	1	1
48	1	1	1	1	1	1	1	1
49	1	1	1	1	1	1	1	1
50	1	1	1	1	1	1	1	1
51	1	1	1	1	1	1	1	1
52	1	1	1	1	1	1	1	1
53	1	1	1	1	1	1	1	1
54	1	1	1	1	1	1	1	1
55	1	1	1	1	1	1	1	1
56	1	1	1	1	1	1	1	1
57	1	1	1	1	1	1	1	1
58	1	1	1	1	1	1	1	1
59	1	1	1	1	1	1	1	1
60	1	1	1	1	1	1	1	1
61	1	1	1	1	1	1	1	1
62	1	1	1	1	1	1	1	1
63	1	1	1	1	1	1	1	1
64	1	1	1	1	1	1	1	1
65	1	1	1	1	1	1	1	1
66	1	1	1	1	1	1	1	1
67	1	1	1	1	1	1	1	1
68	1	1	1	1	1	1	1	1
69	1	1	1	1	1	1	1	1
70	1	1	1	1	1	1	1	1
71	1	1	1	1	1	1	1	1
72	1	1	1	1	1	1	1	1
73	1	1	1	1	1	1	1	1
74	1	1	1	1	1	1	1	1
75	1	1	1	1	1	1	1	1
76	1	1	1	1	1	1	1	1
77	1	1	1	1	1	1	1	1
78	1	1	1	1	1	1	1	1
79	1	1	1	1	1	1	1	1
80	1	1	1	1	1	1	1	1
81	1	1	1	1	1	1	1	1
82	1	1	1	1	1	1	1	1
83	1	1	1	1	1	1	1	1
84	1	1	1	1	1	1	1	1
85	1	1	1	1	1	1	1	1
86	1	1	1	1	1	1	1	1
87	1	1	1	1	1	1	1	1
88	1	1	1	1	1	1	1	1
89	1	1	1	1	1	1	1	1
90	1	1	1	1	1	1	1	1
91	1	1	1	1	1	1	1	1
92	1	1	1	1	1	1	1	1
93	1	1	1	1	1	1	1	1
94	1	1	1	1	1	1	1	1
95	1	1	1	1	1	1	1	1
96	1	1	1	1	1	1	1	1
97	1	1	1	1	1	1	1	1
98	1	1	1	1	1	1	1	1
99	1	1	1	1	1	1	1	1
100	1	1	1	1	1	1	1	1

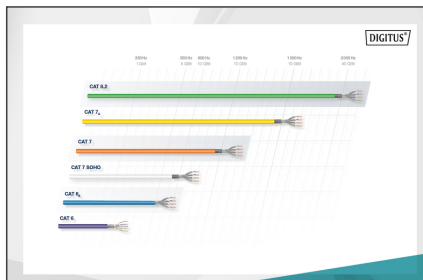

DK-1843-VH-1 // CAT 8.2 S/FTP Installation Cable, 100m, Simplex, D_{ca}

Property	Value
Category	B2ca
Material	Milch
Shielding	D _{ca}
Conductor	E _{ca}
Material	C _{ca}
Shielding	s1a
Conductor	d1
Shielding	a1

