

# DIGITUS Caixa de parede Slim

**DN-19 WM-V6U-SL**  
**EAN 4016032383260**



**Wall mounting cabinet, slim 800x640x309 mm, 6U vertical, color grey (RAL 7035)**

A caixa de parede de 483 mm (19") da série Slim permite uma montagem vertical de 6 unidades rack em profundidade. Poupa especialmente espaço para unidades de rede, DVR, sistemas de som, aplicações de chamada por rádio e de interconexão ou outros componentes ativos de 483 mm (19").

**Design fino com áreas de montagem para instalações verticias no interior**

- Chapa de aço resistente de 1,0 - 1,5 mm
- Áreas de montagem de 483 mm (19") no interior: 6 unidades rack de profundidade
- Entradas de cabos perfuradas com cobertura de plástico em todos os lados (145 x 70 mm)
- Componente de base preparada para admissão de ventiladores
- Porta da frente fechável com ranhuras de ventilação


- Retentor de porta de fácil substituição
- Dimensões da embalagem (AxLxP): 820 x 660 x 320 mm
- Cabinet type: Wall mounting cabinet, home automation
- Color: light grey, RAL 7035
- Depth: 309 mm
- Front door: Steel door, closed, single opening
- Load capacity: 100 kg
- Side panels: Both sides
- Units: 6
- Width: 640 mm
- IP protection class: IP20
- Mounted: yes


**Package contents**

- Earthing wire set
- 2 x Keys

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	1	21.00	32.00	66.00	82.00	173,184.00
Packaging Unit Inside	1	21.00	32.00	66.00	82.00	173,184.00
Packaging Unit Single	1	21.00	32.00	66.00	82.00	173,184.00
Net single without Packaging	1	19.00	30.90	64.00	80.00	0.00

**More images:**

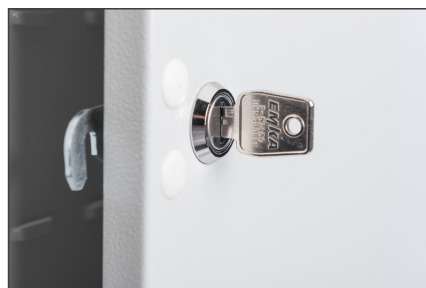

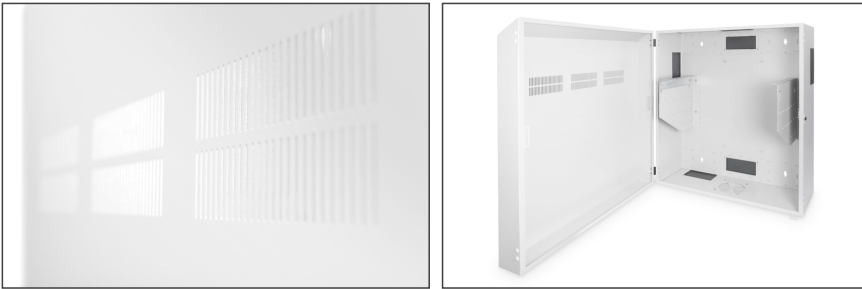**Safety notes**

- Ensure adequate ventilation to prevent the installed devices from overheating.
- Network cabinets should not be overfilled and the ventilation openings must not be blocked.
- Cables should be laid neatly and organized in cable ducts or trays.
- Use surge protection devices to protect sensitive devices from power surges or lightning strikes.
- Avoid moisture or wetness while observing the respective IP protection class.
- Ensure that the cabinet and the devices used are properly earthed.
- In regions with frequent thunderstorm activity, professional lightning protection should be integrated into the power supply.
- To avoid uneven loading, always mount the heaviest units at the bottom of the cabinet.
- Disconnect the installed devices from the power supply during maintenance or installation work.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)