

DIGITUS Промышленный инжектор PoE+ с поддержкой гигабитных скоростей, 802.3 af/at

DN-651112
EAN 4016032445845



Industrial Gigabit PoE+ Injector 802.3af/at 60W power output, DIN rail and wall mount design,

Использование инжектора Digitus PoE позволяет сократить расход кабеля при установке устройств с поддержкой технологии PoE, например, сетевых IP-камер. Загрузка данных, а также электропитание устройств осуществляется только по сетевому кабелю Ethernet. Таким образом, пропадает необходимость прокладки отдельного кабеля электропитания, что позволяет усовершенствовать сеть также там, где отсутствуют розетки и кабели электропитания. Инжектор полностью соответствует стандарту IEEE802.3af Ultra PoE и обеспечивает выходную мощность в 60 Вт.

Высокая выходная мощность: 60 Вт

- Соответствует стандарту 802.3af/at PoE
- Выходное напряжение от 45 до 56 В, 60 Вт
- Вход LAN RJ45
- Выход LAN (RJ45), контакты питания: 4/5(+), 7/8(-) и 3/6(+), 1/2(-)
- Кабельное соединение: 10/100/1000 Мбит/с
- Выход оснащен ограничителем тока нагрузки, предохранителем для защиты от коротких замыканий, а также функцией автоматического конечного распознавания и классификации устройства
- Потребляемая мощность: не более 3 Вт.



- Рабочая температура: от -40 до 75 °C
- Энергопотребление в режиме ожидания менее 0,3 Вт.
- Компактный и прочный металлический корпус
- Отличная защита от коротких замыканий
- Защита от молний и скачков напряжения
- Возможность монтажа на шину DIN (монтажную шину) и на стену
- PoE Power budget: 60 W
- PoE standard: IEEE802.3af (PoE+)
- Ethernet speed: Gigabit
- Power output: Depending on power supply
- Industrial usage: yes
- Installation type: DIN rail
- Managed: no
- Outdoorsuitable: no
- PoE (Power over Ethernet): yes
- Protection against vandalism: no
- VLAN: no

Package contents

- Промышленный инжектор PoE+ с поддержкой гигабитных скоростей, 802.3 af/at
- Краткое практическое руководство

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	36	14.76	39.00	35.00	33.00	45,045.00
Packaging Unit Inside	1	0.41	16.50	12.50	5.00	1,031.25
Packaging Unit Single	1	0.41	16.50	12.50	5.00	1,031.25
Net single without Packaging	1	0.30	10.30	7.70	3.20	0.00

More images:

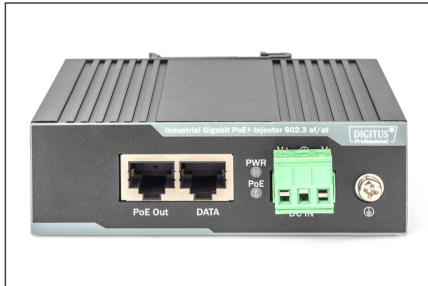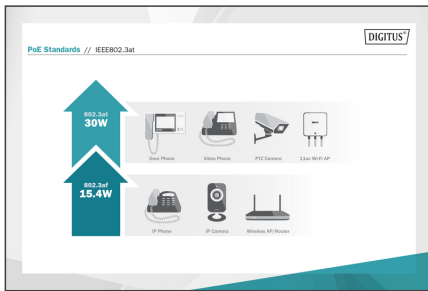

Safety notes

- This product is intended for indoor use only.
- Read all instructions and follow all warnings and instructions on the device.
- Do not place this appliance on an unstable surface (such as a trolley, stand, table, etc.).
- Do not use this appliance near water.
- Do not place this appliance near or above a radiator.
- The housing is equipped with openings for heat dissipation and ventilation. To prevent overheating during operation, the ventilation openings must not be blocked or covered.
- Do not place the appliance on a soft surface (e.g. bed, sofa, blanket, etc.). This will block the ventilation.
- The appliance must not be installed in a closed environment if adequate ventilation is not guaranteed.
- Do not spray any liquids onto the appliance.
- Disconnect the mains plug before cleaning. Do not use any liquid or foam cleaners.
- Clean the appliance with a damp cloth.
- Connect the device according to the power supply on the rating plate.
- To prevent damage to the appliance, it is important that all appliances are properly earthed.
- Do not place any objects on the power cable and lay it in such a way as to avoid tripping hazards.
- Use a surge protector, a regulator or an uninterruptible power supply (UPS) to protect your system from sudden, temporary and reduced power.
- Secure the system cable and mains cable properly and ensure that no objects are pressing on the cable.
- Do not insert any objects into the appliance through the openings in the housing. There is a risk of a short circuit, which can lead to fire or electric shock.
- Do not attempt to repair the appliance yourself. Always contact an authorized customer service centre.
- If any of the following conditions occur, unplug the appliance and return it to an authorized service centre for repair
- The mains cable, power supply unit or plug for the power supply is damaged or worn;
- Liquid has penetrated the appliance;
- The device has been exposed to rain or water;
- The device has been dropped or the housing has been damaged;
- The function of the device has obviously changed;
- The appliance cannot be operated as described in the operating instructions.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com