

DIGITUS Инжектор PoE+, 16 портов 10G

DN-95116
EAN 4016032430377



Gigabit Ethernet PoE+ Injector Hub, 802.3at, 10G 16-port, Power Pins:3/6(+), 1/2(-), 250W

DN-95116 DIGITUS® является 16-портовым сетевым концентратором 10G с поддержкой технологии PoE+ Mid-Span (PoE-инжектор). Он предлагает к использованию 16 входных порта для получения данных и 16 выходных порта, которые позволяют использовать эти данные и технологию PoE. Каждый порт PoE поддерживает подключенные устройства согласно стандарту PoE IEEE802.3af и IEEE802.3at мощностью в 15,4 Вт или 30 Вт, например, терминалы PoE, IP-телефоны PoE или IP-камеры PoE. Сетевой коммутатор предоставляет на все порты максимальный ресурс в размере 250 Вт, а на каждый порт максимум по 30 Вт.

Минимальные расходы на кабельную разводку для устройств с поддержкой технологии PoE

- 32 портов 10/100/1000 Мбит/с /2.5G/10G (16 портов для входа данных, 16 портов выхода данных +PoE)
- Совместим со стандартами IEEE802.3af , IEEE802.3at
- Электропитание PoE через контакт 1,2 (В-) и контакт 3,6 (В+)
- Максимальная общая мощность 250 Вт

- Совместим со стандартами IEEE802.3, IEEE802.3u, IEEE802.3ab
- Функция автоматического распознавания кабеля – Auto-MDI-/MDI-X
- Автоматическое распознавание полудуплекса и дуплекса
- Питание: 100-240 В переменного тока
- Диапазон рабочих температур: 0°C до 40°C
- Температура хранения: -20°C – 70°C
- Размер (мм): 440 (Д) x 200 (Ш) x 45 (В)
- Средняя наработка на отказ: 100 000 часов

Attributes


- Number of ports: 16
- PoE Power budget: 250 W
- PoE standard: IEEE802.3at (PoE+)
- Ethernet speed: 10 gigabit
- Industrial usage: no

Package contents

- Инжектор PoE+, 16 портов 10G
- Краткое практическое руководство
- Сетевой кабель
- Крепежные комплектующие

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	5	20.83	59.50	29.50	22.00	38,615.50
Packaging Unit Inside	1	4.17	50.00	28.00	10.00	14,000.00
Packaging Unit Single	1	4.17	50.00	28.00	10.00	14,000.00
Net single without Packaging	1	2.80	44.00	20.00	4.50	0.00

More images:

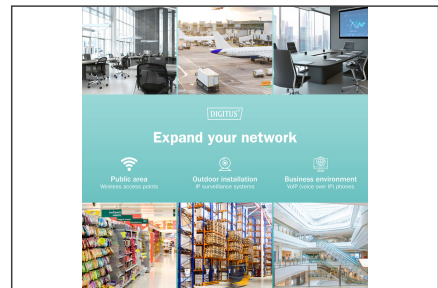

Safety notes

- This product is intended for indoor use only.
- Read all instructions and follow all warnings and instructions on the device.
- Do not place this appliance on an unstable surface (such as a trolley, stand, table, etc.).
- Do not use this appliance near water.
- Do not place this appliance near or above a radiator.
- The housing is equipped with openings for heat dissipation and ventilation. To prevent overheating during operation, the ventilation openings must not be blocked or covered.
- Do not place the appliance on a soft surface (e.g. bed, sofa, blanket, etc.). This will block the ventilation.
- The appliance must not be installed in a closed environment if adequate ventilation is not guaranteed.
- Do not spray any liquids onto the appliance.

- Disconnect the mains plug before cleaning. Do not use any liquid or foam cleaners.
- Clean the appliance with a damp cloth.
- Connect the device according to the power supply on the rating plate.
- To prevent damage to the appliance, it is important that all appliances are properly earthed.
- Do not place any objects on the power cable and lay it in such a way as to avoid tripping hazards.
- Use a surge protector, a regulator or an uninterruptible power supply (UPS) to protect your system from sudden, temporary and reduced power.
- Secure the system cable and mains cable properly and ensure that no objects are pressing on the cable.
- Do not insert any objects into the appliance through the openings in the housing. There is a risk of a short circuit, which can lead to fire or electric shock.
- Do not attempt to repair the appliance yourself. Always contact an authorized customer service centre.
- If any of the following conditions occur, unplug the appliance and return it to an authorized service centre for repair
- The mains cable, power supply unit or plug for the power supply is damaged or worn;
- Liquid has penetrated the appliance;
- The device has been exposed to rain or water;
- The device has been dropped or the housing has been damaged;
- The function of the device has obviously changed;
- The appliance cannot be operated as described in the operating instructions.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH

Auf dem Schüffel 3

Lüdenscheid, Germany

<https://www.assmann.com>

info@assmann.com