

# DIGITUS Соединительный кабель DisplayPort

AK-340100-010-S  
EAN 4016032288916



**DisplayPort connection cable, DP M/M, 1.0m, w/interlock, Ultra HD 4K, bl**

Этот высокоскоростной цифровой аудио-/видеокабель с поддержкой HD используется для подключения ПК или ноутбука к мониторам с интерфейсом DisplayPort.

**Идеально подходит для CAD/CAM, GIS, разработки 3D, моделирования в режиме реального времени и много другого.**


- Поддерживает 4K/2K при 60 Гц
- Поддерживает видеоформат: 4K/2K @24 Гц, 4K/2K @30 или 4K/2K 60 Гц
- Поддерживает видеоразрешение: 4096 x 2160p; 1920 x 1080p

**Attributes**

- Assortment: DisplayPort Cables
- AWG: 30
- Color cable: black
- Color connector: black
- Connector 1: DP, plug
- Connector 2: DP, plug
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.2
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Interlock: Snap fastener
- Wire material: CCS
- Length: 1 m
- AOC - Active Optical Cable: no
- Shielding: triple shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	100	8.00	50.00	33.00	22.00	36,300.00
Packaging Unit Inside	10	0.80	2.00	14.00	22.00	616.00
Packaging Unit Single	1	0.08	22.00	14.00	2.50	770.00
Net single without Packaging	1	0.06	14.00	12.50	2.00	0.00

**More images:**

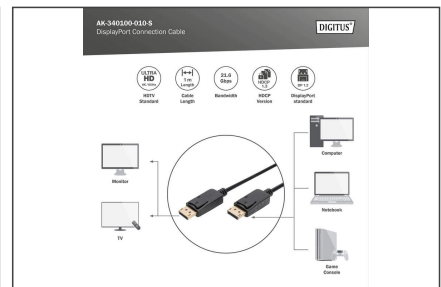

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product specifications for the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)