

# DIGITUS Cabo adaptador DisplayPort

**DB-340400-001-S**  
**EAN 4016032292296**



**DisplayPort adapter cable, DP - HDMI type A M/F, 0.15m,w/interlock, DP 1.1a, CE, bi**

Este cabo HD de vídeo e áudio digital adequa-se, por exemplo, de forma ideal para a ligação de um computador portátil ou computador com interface DP a um monitor HDMI, projetor, monitor LCD/TFT, TV LED ou plasma através de um cabo HDMI.


**Imagem clara e nítida-resoluçãoFull HD**


- Suporta Full HD/1080p
- Suporta DP++ modo duplo
- Contribui para uma carga reduzida da interface.
- Assortment: DisplayPort Cables
- AWG: 28
- Color cable: black

- Color connector: black
- Connector 1: DP, plug
- Connector 2: HDMI type A, jack
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.1a
- HDTV Resolution max.: 1920 x 1080 Pixel, 60Hz
- HDTV Standard: Full HD
- Hoods: molded
- Interlock: Snap fastener
- Wire material: CU
- Length: 0.15 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	80	6.60	52.00	29.00	39.00	58,812.00
Packaging Unit Inside	20	1.65	27.00	25.00	17.00	11,475.00
Packaging Unit Single	1	0.08	26.50	7.50	2.30	457.13
Net single without Packaging	1	0.05	24.00	2.10	1.20	0.00

**More images:**

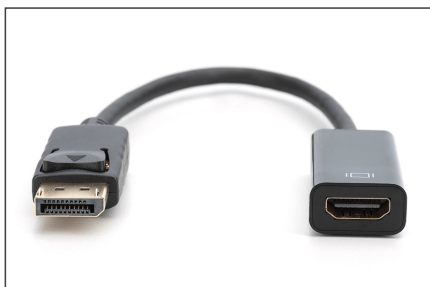

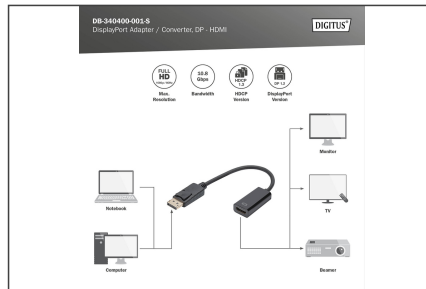

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)