


# DIGITUS Соединительный кабель SATA

AK-400102-003-R  
EAN 4016032299943

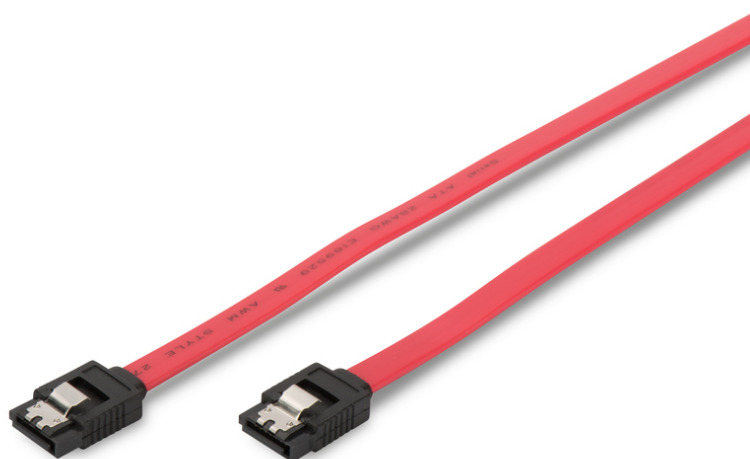

**SATA connection cable, L-type, w/ latch F/F, 0.3m, straight, SATA II/III, re**

Этот внутренний контактный кабель предназначен, к примеру, для соединения разъёма Serial-ATA жесткого диска, а также CD-/DVD/Blue-Ray проигрывателей с материнской платой. Совместим также с SATA II/I.

**с защелкой для надежного соединения**

- Совместим со стандартом последовательного интерфейса ATA
- 7-проводный кабель, UL21149
- 2 угловых кронштейна в комплекте
- Обеспечивает безопасное подключение жесткого диска и материнской платы
- Обеспечивает безопасное подключение жесткого диска и материнской платы

**Attributes**

- Assortment: SATA Cables
- AWG: 26
- Color cable: red
- Color connector: black
- Connector 1: SATA (7pin) connector, L-type
- Connector 2: SATA (7pin) connector, L-type
- Data rate: 6 Gbit/s
- Hoods: molded
- Interlock: Metal latch
- Packaging: Polybag
- Style: Flat cable
- Version: SATA Revision 3
- Wire material: CU
- Length: 0.3 m
- Shielding: Unshielded

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	300	4.50	46.00	32.00	25.00	36,800.00
Packaging Unit Inside	10	0.15	13.00	5.50	17.00	1,215.50
Packaging Unit Single	1	0.02	9.50	0.50	15.00	71.25
Net single without Packaging	1	0.01	8.20	2.00	1.30	0.00

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)