


DIGITUS Cabo de ligação null modem

AK-610100-018-E
EAN 4016032301035

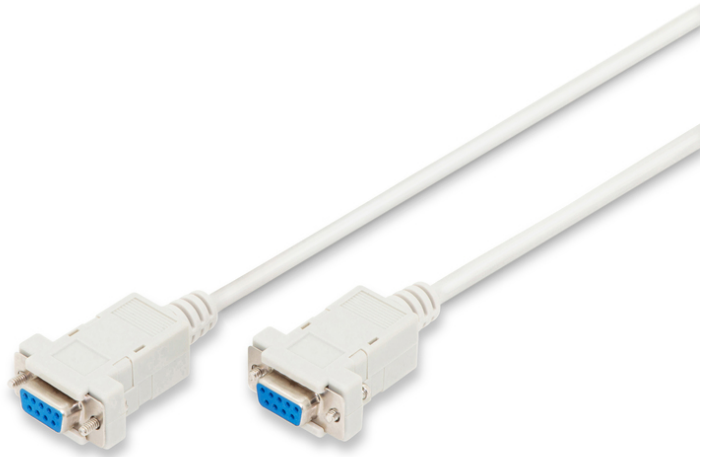

Zero-Modem connection cable, D-Sub9 F/F, 1.8m, snap-hoods, be

Neste cabo, os pinos para emissão e receção estão invertidos. Assim, a troca de dados direta entre 2 computadores ou também um computador e um recetor SAT é possível. Tal permite que o recetor SAT esteja sempre atualizado.



Permite uma ligação segura e estável


- A ligação aparafusada adicional, quer na entrada, quer na saída contribui para a segurança máxima numa utilização profissional. Gire simplesmente o fecho de rosca no casquilho previsto – está pronto. A remoção inadvertida do conector D-Sub deixa de ser possível.

- Assignment: 1-4, 2-3, 3-2, 4-1, 5-5, 7-8, 8-7, 9-9, S-S
- Assortment: Serial Cables
- Color cable: beige
- Color connector: beige
- Connector 1: DSUB, 9-pin, jack
- Connector 2: DSUB, 9-pin, jack
- Connector surface: nickel-plated
- Hoods: snap hood
- Length: 1.8 m

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	100	9.20	32.00	29.00	30.00	27,840.00
Packaging Unit Inside	10	0.92	27.00	27.00	9.00	6,561.00
Packaging Unit Single	1	0.09	26.00	14.00	3.50	1,274.00
Net single without Packaging	1	0.08	13.00	12.00	2.00	0.00

More images:

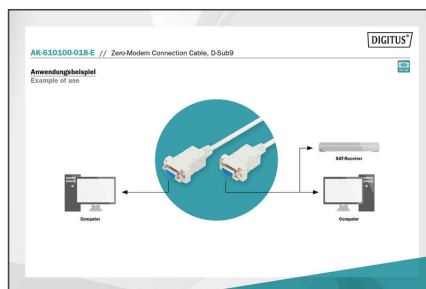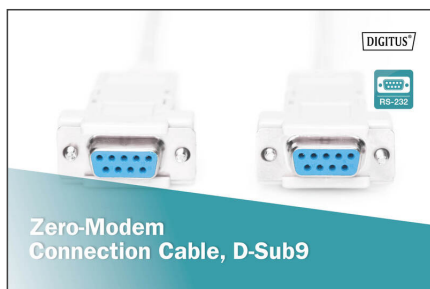

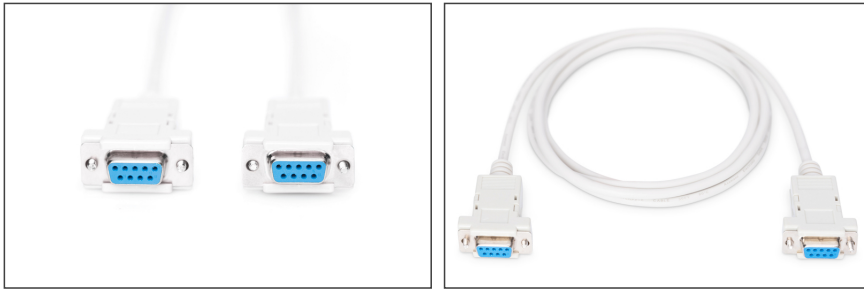**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com