


# DIGITUS Сплайс-кассета на 12 оптических волокон, заранее собрана, SC, волокна OM4

A-96522-02-UPC-4  
EAN 4016032319344

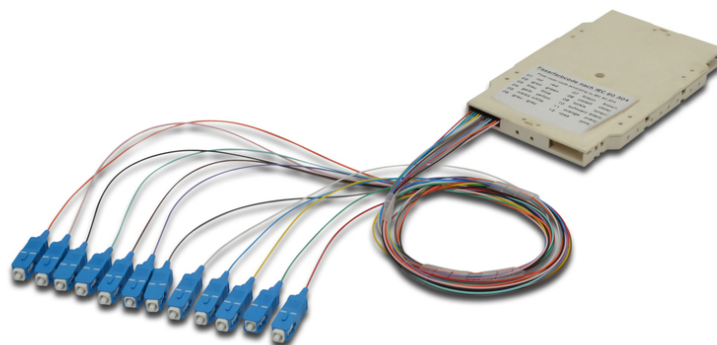

## FO splice cassette with 12 colored pigtails SC (UPC), MM OM4 50/125 æ, LSZH

Заранее собранные кассеты с уже подготовленными выводами кабеля имеют подходящую длину и расположены в соответствии с цветовым кодом IEC 60 304. Маркировка наверху кассеты показывает, какой цветовой код был использован для вывода кабелей. Каждая кассета содержит протокол проверки для соответствующих выводов кабеля и гарантирует таким образом

лучшее качество и оптимальную работу Вашей сети.


### Быстрое подключение, благодаря готовым монтажным шнурам

- Сплайс-кассета на 12 оптических волокон, заранее собрана
- Коннектор SC (UPC); одномодовый 9/125µ
- цветные переходники; LSOH
- свободный буфер

### Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	40	11.20	41.00	31.50	60.00	77,490.00
Packaging Unit Inside	1	0.28	3.00	31.50	30.50	2,882.25
Packaging Unit Single	1	0.28	1.50	29.00	29.00	1,261.50
Net single without Packaging	1	0.12	0.00	0.00	0.00	0.00

### More images:

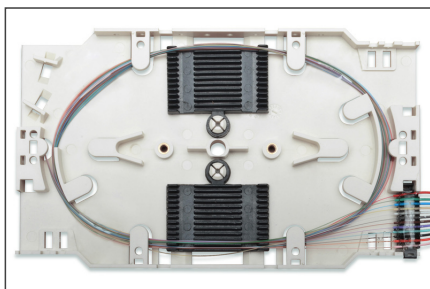

### Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product specifications for the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)