


DIGITUS Fiber Optic Patchcord, MPO, Female, OS2, Method A, 1m

DK-2966-01
 EAN 4016032345121

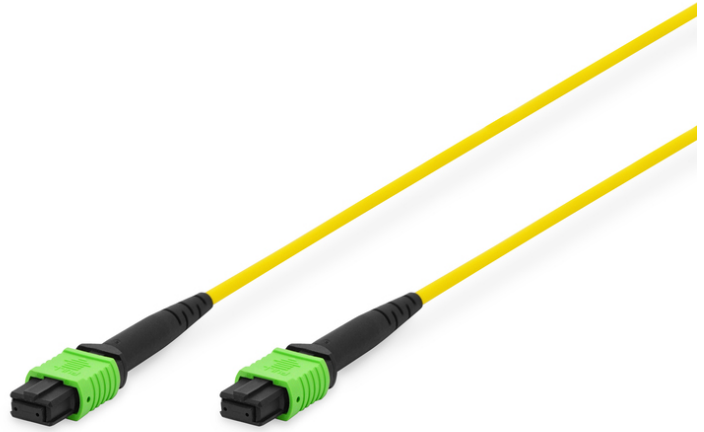

Fiber Optic Patchcord, MPO to MPO, Female, OS2, SM 09/125 μ, 1m, APC, Method A, yellow/green

The MPO patch cable allows data rates of 40Gb/s or 100Gb/s and is the answer of the needed growing bandwidths of datacenters. The standardized IEC61754-7 and TIA/EIA 604-5 MPO Plug guaranteed the best performance in the whole network and is hardly larger than an standard RJ45 plug. The excellent damping and the compact design makes this patch cable to the first choice, if we talk about bandwidth and performance.

High-performance solutions designed for efficient and scalable connectivity in data centers.

- Connector : MPO female
- Polish : APC
- Type : Method A
- Fibre type : SM-G652D, 9/125μ, OS2
- Fiber Count : 12
- Cable outer diameter : 3 mm
- Sheath colour : Yellow

- Cable length : 1 m
- Outer sheath material : LSZH
- Max. Tensile strength : 300 N
- Min. bending radius : 30 mm
- Temperature range : -40°C till +75°C
- Cable diameter: 3 mm
- Cable jacket: LSOH
- Color cable: yellow
- Fiber class: OS2
- Fiber diameter: 9/125μ
- Mode: Singlemode
- Number of connectors side 1: 1
- Number of connectors side 2: 1
- Number of fibers: 12
- Packaging: DIGITUS Polybag
- Length: 1 m

Package contents

- 1 x Fiber Optic Patchcord, MPO, Female, OS2, Method A, 1m

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	400	5.47	40.00	40.00	30.00	48,000.00
Packaging Unit Inside	1	0.01	1.00	20.00	29.00	580.00
Packaging Unit Single	1	0.01	1.00	20.00	29.00	580.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00