

DIGITUS Cabo de ligação USB Type-C

AK-300138-010-S
EAN 4016032368939



USB Type-C connection cable, type C to C M/M, 1.0m, 3A, 480MB, 2.0 Version, bl

Para a ligação externa de dispositivos USB (com conector C, p. ex. Tablet ou Smartphone) ao anfitrião USB (p. ex. PC, Notebook ou concentrador USB). Taxa de transferência de dados até 480 Mbps (High-Speed).

Permite uma ligação fiável e rápida de dispositivos externos USB ao PC.


- Fios de cobre, blindado com película e entrançado para uma robustez e uma ligação fiável
- Taxa de transferência de dados até 480 Mb/s (HighSpeed)
- Alimentação de tensão até 5 V/3 A e 15 W, 480Mbps
- Suporta a especificação USB PD (Power delivery).
- Conector Type-C- utilizável dos dois lados


Attributes

- Assortment: USB Cables
- AWG: 24/28
- Color cable: black
- Color connector: black
- Connector 1: USB C, plug
- Connector 2: USB C, plug
- Connector surface: nickel-plated
- Hoods: molded
- Wire material: CU
- Length: 1 m
- Shielding: Double shielding
- USB-C Products: yes

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	400	6.50	50.00	32.00	21.00	33,600.00
Packaging Unit Inside	10	0.16	30.00	20.00	1.40	840.00
Packaging Unit Single	1	0.02	9.00	9.00	0.62	50.22
Net single without Packaging	1	0.01	9.00	9.00	0.60	0.00

More images:

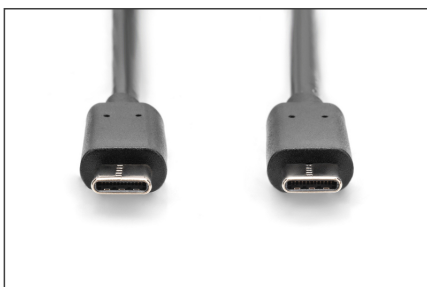

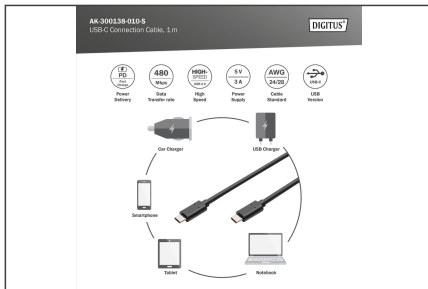

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com