


# DIGITUS DIGITUS CAT 6 SF/UTP монтажный кабель витая пара

**DK-1633-P-305**  
**EAN 4016032425960**

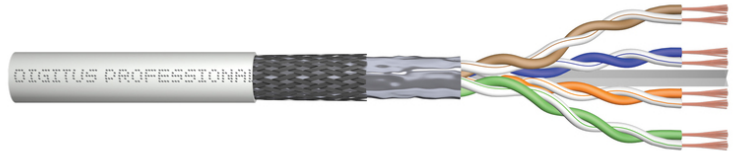

**CAT 6 SF-UTP patch cable, raw 305 m, paper box, AWG 26/7, LSZH, sx, grey**

Подходит для установки кабельных линий класса D, 100 МГц

**Отличная производительность и качество связи для Вашей сети.**

- Изоляция: полиэтилен высокой плотности
- Основной проводник: многожильный AWG 26/7
- Изоляция: PE
- Общее количество изолированных проводников: 8, свиты в 4 пары
- Цветовой код: сине-белый, оранжево-белый, зелено-белый, коричнево-белый
- Индивидуальная экранировка пар: отсутствует
- Общее экранирование: отсутствует
- Диапазон рабочей температуры: -10 °C до +60 °C

- Цвет: Серый (RAL 7035)
- Механические свойства
- Растяжение: 150 Н макс.
- Сопротивление петли по пост. току: 147 Ом/км макс. (2% макс. разбаланс сопротивлений)

**Attributes**

- Assortment: Twisted Pair Patch Cables
- Category: CAT 6
- Shielding: SF-UTP, foil and braid shielding
- Length: 305 m
- Color: grey
- Jacket: LSOH
- Slim Version: no
- Structure: 4 x 2 AWG 26/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	2	24.60	42.50	47.00	45.00	89,887.50
Packaging Unit Inside	1	12.30	43.00	43.00	20.00	36,980.00
Packaging Unit Single	1	12.30	43.00	43.00	20.00	36,980.00
Net single without Packaging	1	11.05	30.50	6.30	6.30	0.00

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)