

DIGITUS Cat.7 S/FTP installation cable, 305 m, simplex, Dca-s1a,d0,a1

DK-1743-VH-305-MF-W
EAN 4016032454557



CAT 7 S-FTP installation cable, 305 m, box, 1200MH AWG 26/1, 600 MHz, Dca, LSZH-3, color RAL9003

The DIGITUS® Cat.7 S/FTP installation cable is characterized by the following cable construction 4x2x AWG 26/1 and reaches a transmission frequency up to 1200 MHz. The halogen free cable jacket is conform to the standard IEC 60332-3-24, FRNC-C, LSZH-3 and CPR Euro class Dca. The cable is suitable for laying in residential as well as SoHo areas.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare copper wire, AWG 26/1
- Insulation: SFS-PE (foamed polyethylene jacket)
- Total number of insulated conductors: 8, twisted into 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: Aluminum-laminated polyester film, covers 100%
- Overall shielding: copper braiding
- Outer sheath: Dca acc. to EN 50755; LSZH
- Outer sheath thickness (nominal): 0.52 mm nominal
- Outer casing color: White (RAL 9003)
- Mechanical properties:
- Strain relief: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Transport and storage temperature range: -20 °C to +60 °C
- Operating temperature range: -20 °C to +50 °C
- Installation temperature range: 0 °C to +50 °C

- Outer diameter simplex (nominal): 5.7 mm nominal
- Weight (kg/km): 35 kg/km
- Electrical properties:
- Impedance: 100±150Ω @ 4 - 100MHz; 100±250Ω @ 100 - 600MHz
- Capacitance: 45 pF/m nominal @ 1 KHz
- Insulation resistance: 5 GΩm x km min.
- DC resistance: 95 Ω/km max. (2% max. unbalanced resistance)
- Loop resistance: 190 Ω/Km max. (2% max. unbalanced resistance)
- Operating voltage: 72 Vdc max.
- Coupling attenuation: CA-Type 1b
- Phase delay: 450 nS/100 m max.
- Time delay: 25 nS/100 m max.
- Separation class: "d" according to EN 50174-2
- Maximum insert length: 60 m
- NVP: 79%
- Flame spread: EN EN 60332-1-2 (LSOH-PVC)
- Halogen-free, corrosiveness: EN 60754-1/2 (LSOH)
- Smoke density EN 61034-2
- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Dca
- Length: 305 m
- Color: white
- Jacket: LSOH
- Structure: 4 x 2 AWG 26/1, solid twisted pair


Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	12.76	43.00	23.00	43.00	42,527.00
Packaging Unit Inside	1	12.76	43.00	23.00	43.00	42,527.00
Packaging Unit Single	1	12.76	43.00	23.00	43.00	42,527.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:



CAT 7 S/FTP Installation Cable, 305 m, Simplex, D_{ca}

DK-1743-VH-305-MF-W // CAT 7 S/FTP Installation Cable, 305 m, Simplex, D_{ca}

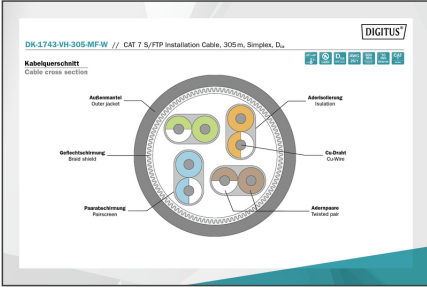

Produktdaten Product Information


Elektrische Eigenschaften Electrical Properties

Mechanische Eigenschaften Mechanical Properties

Leistungseigenschaften Power Properties

PREQ	NEXT	PS NEXT	ACR	PS ACR	RL	NEXT	PS NEXT
10	23	20	23	20	23	20	20
20	23	20	23	20	23	20	20
30	23	20	23	20	23	20	20
40	23	20	23	20	23	20	20

Certificate No. 15429-13-4
Zertifikat No. 15429-13-1

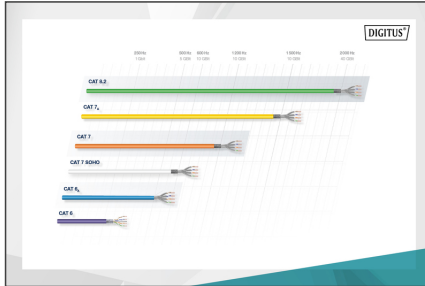

CAT 7 vs CAT 6A vs CAT 6 vs CAT 5

