


# DIGITUS Cat. 7A class FA, S/FTP, Twisted Pair installation cable, 1000 m, simplex, 1500 MHz

DK-1744-A-VH-10-P  
EAN 4016032462972

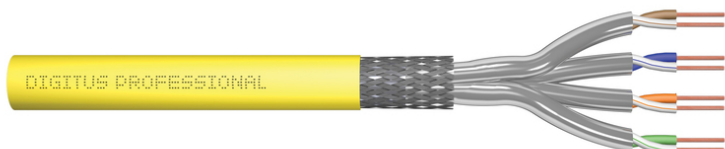

### CAT 7A S-FTP installation cable, 1500 MHz Cca, AWG 22/1, 1000 m, SX, yellow

The DIGITUS® Cat. 7A S/FTP installation cable features the following cable structure 4x2x AWG22/1 and achieves a transmission frequency of up to 1500 MHz. The halogen-free cable sheath complies with the standards IEC 60332-3-24, FRNC-C, LSZH-3 and BauPVO Euroclass Cca. The cable is suitable for structured building cabling in secondary and tertiary areas. Complies with the standards ISO/IEC 11801, DIN EN 50173, DIN EN 50288-9-1.






#### Future-oriented standards and high-end quality for your network.

- Physical properties
- Cable: Bare copper wire, AWG 22/1
- System/s of AVCP: AVCP 3
- Insulation: SFS-PE (foamed polyethylene sheath)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: Aluminum-covered polyester film, 100% coverage
- Overall shielding: Copper mesh
- Outer sheath: Dca to CCA complies with EN 50575
- Outer sheath thickness (nominal): 0.60 mm (CCA)
- Outer sheath color: Sulfur yellow (RAL 1028)
- Mechanical properties
- Cable grip: 150 N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.

- Transport and storage temperature range: -20 °C to +75 °C
- Operating temperature range: -20 °C to +60 °C
- Installation temperature range: 0 °C to +50 °C
- External diameter simplex (nominal): 8.0 mm (CCA)
- Weight (kg/km): 68.0 kg (CCA)
- Electrical properties
- Impedance: 100 ± 5 ohm @ 1-1000 MHz
- Capacity: 40 pF/m nominal @ 1 KHz
- Capacity unbalance (pair earth): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 Gohm x km min.
- DC resistance: 72 ohm/km max. (2% max. non-balanced resistance)
- Loop resistance: 147 ohm/km max. (2% max. non-balanced resistance)
- Operating voltage: 72 VDC max.
- Insertion loss: 80 dB
- Phase delay: 450 nS/100 m max.
- Signal delay: 10 nS/100 m max.
- Segregation classification: "d" in accordance with EN 50174-2
- NVP: 75%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 7A
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Cca
- Length: 1000 m
- Color: yellow
- Jacket: LSOH
- Structure: 4 x 2 AWG 22/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	66.50	53.00	53.00	43.50	122,192.00
Packaging Unit Inside	1	66.50	53.00	53.00	43.50	122,192.00
Packaging Unit Single	1	66.50	53.00	53.00	43.50	122,192.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

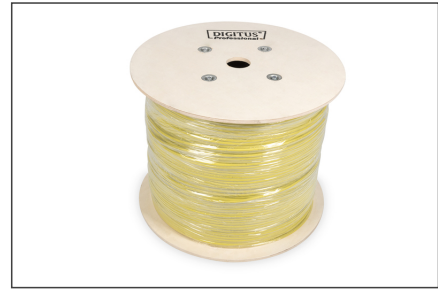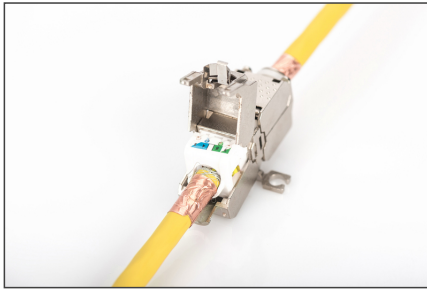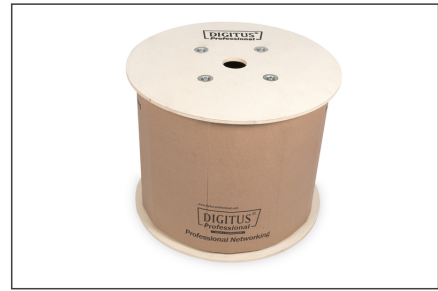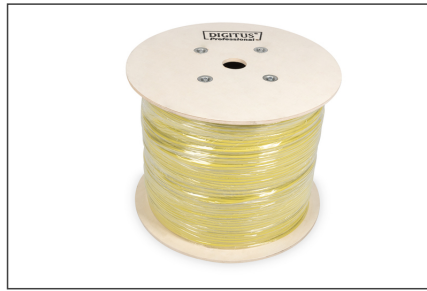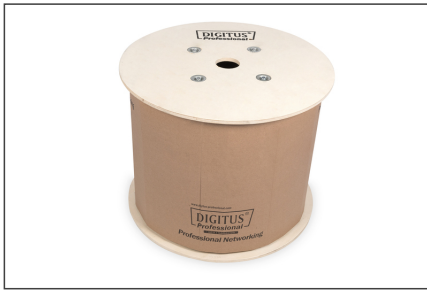

**CAT 7<sub>A</sub> S/FTP**  
Twisted Pair Installation Cable,  
1000 m, Simplex, C<sub>ca</sub>

- AWG 22/21
- 1500 MHz
- CAT 7
- 90° / 60°
- LSZH
- C<sub>ca</sub> CPE class

**DK-1744-A-VH-10P // CAT 7<sub>A</sub> S/FTP Twisted Pair Installation Cable, 1000 m, Simplex, C<sub>ca</sub>**

**Anwendungsbispiel**  
Example of use

**DK-1744-A-VH-10P // CAT 7<sub>A</sub> S/FTP Twisted Pair Installation Cable, 1000 m, Simplex, C<sub>ca</sub>**

**Kabelquerschnitt**  
Cable cross section

Technische Spezifikationen / Technical Specifications		Physikalische Spezifikationen / Physical Properties	
<b>Identifikations- / Identification:</b>	Hersteller / Manufacturer: DIGITUS	<b>Farbe / Color:</b>	Blau / Blue
<b>Bestandteile / Components:</b>	1000 m / 3280 ft	<b>Leitungsbauweise / Cable construction:</b>	100% Kupfer / 100% Copper
<b>Elektrische Eigenschaften / Electrical Properties:</b>	AWG 22/21	<b>Leitungsbauweise / Cable construction:</b>	100% Kupfer / 100% Copper
<b>Mechanische Eigenschaften / Mechanical Properties:</b>	1000 m / 3280 ft	<b>Leitungsbauweise / Cable construction:</b>	100% Kupfer / 100% Copper


**Leistungseigenschaften / Performance Properties**

PROBEN	AVT	SEKT	PS NEXT	ACR	PLACK	AL	SLACK	PSLACK
100	48	48	48	48	48	48	48	48
1000	48	48	48	48	48	48	48	48
10000	48	48	48	48	48	48	48	48
100000	48	48	48	48	48	48	48	48
1000000	48	48	48	48	48	48	48	48

**GHMT PREMIUM Zertifikat**  
No. 458874-20

**Kategorie 7<sub>A</sub>**

**GHMT PREMIUM Zertifizierung Programm, GHMT PDP**

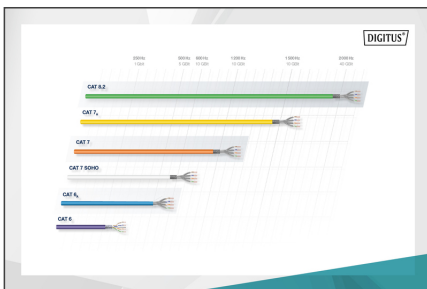

**DIGITUS**

**CEP System**

System	Leistungseigenschaften (MHz)	Adaptier- / verifizierbare Werte (dB)	Qualitätsmerkmale
<b>B2ca</b>	1000	1+	• Typischerweise • Hohe Flexibilität
<b>Cca</b>	1000	1+	• Typischerweise • Hohe Flexibilität
<b>D</b>	1000	3	• Typischerweise • Hohe Flexibilität
<b>E</b>	1000	3	• Typischerweise • Hohe Flexibilität