


DIGITUS Fiber Optic simplex patch cable, Singlemode, LC/APC - LC/APC, 3 m

DK-2933-03-APC-SX
EAN 4016032492832

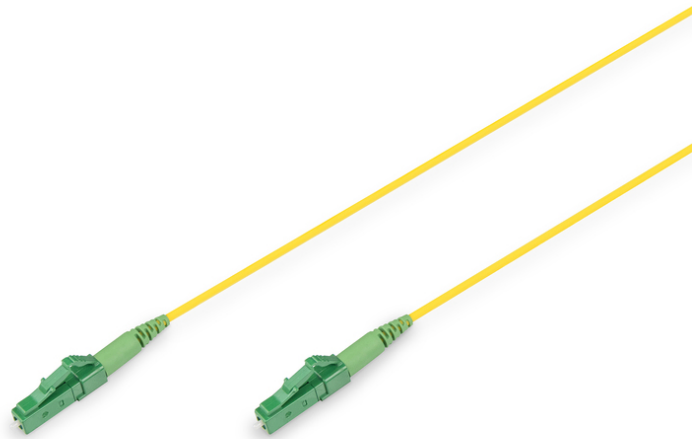

FO patch cord, SM, Simplex LC/APC to LC/APC G657.A02, 3m

The single mode simplex fiber cable enables easier installation due to their bend insensitive characteristic. It is designed to transmit data with less attenuation when bent or twisted and as a result the cables are very efficient. Therefore, this makes the cable excellently suited for confined spaces. It is ideal for use in telecommunications, FTTx (FTTH, FTTB) applications and also gives more space for high-density cable installation requirements in enterprise networks, telecom rooms, server farms, horizontal and equipment distribution areas.

High-quality fibre simplex patch cables offer an excellent connectivity option for indoor and FTTx applications. The longevity of cables is ensured by reliable connector performance.

- Fiber type : Singlemode 9/125
- Category: G657A2
- Cable length : 3m
- Number of fibers: 1
- Cable construction : Simplex
- Connector 1 Type : LC/APC
- Connector 2 Type : LC/APC
- Maximum pulling force : 100 N
- Cable Ø : 2.0 mm
- Minimum bending radius : 7.5 mm

- Coat color : Yellow
- Sheath material : LSZH
- Insertion loss 1310 nm : 0.3 dB
- Operating temperature : -20 - 70 °C
- Storage temperature : -20 - 85 °C
- Application: indoor
- Boot: single-color
- Cable diameter: 2 mm
- Cable jacket: LSOH
- Color cable: yellow
- Connector 1: LC (APC)
- Connector 2: LC (APC)
- Fiber class: OS2
- Fiber diameter: 9/125µ
- Mode: Singlemode
- Number of connectors side 1: 1
- Number of connectors side 2: 1
- Number of fibers: 1
- Polishing: APC
- Length: 3 m

Package contents

- 1 x Fiber Optic simplex patch cable, Singlemode, LC/APC - LC/APC, 3 m

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	200	3.66	27.00	41.00	41.00	45,387.00
Packaging Unit Inside	1	0.02	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.02	0.50	29.00	19.00	275.50
Net single without Packaging	1	0.02	0.30	12.00	12.00	0.00

More images:

