

# DIGITUS Fiber optic coupling, LC/APC, duplex, without flange

DN-96007-1APC-OF  
EAN 4016032494645



**FO coupler, duplex, LC APC, SM, Without flange Ceramic Sleeve, Polymer-Gehäuse**

Spojovací zařízení nabízí optimální provoz a kvalitní propojení v oblasti kabelů s optickými vlákny.

**Nejlepší řešení pro propojení boxů**

- LC / APC bez příruby
- Duplexní

- Keramický kysličník zirkoničitý
- Polymerový kryt
- zelená
- včetně připevňovacího materiálu


**Package contents**

- Fiber optic coupling, LC / APC, duplex, without flange

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	1500	0.42	23.00	33.00	33.00	25,047.00
Packaging Unit Inside	1	0.00	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.00	11.00	20.00	30.00	6,600.00
Net single without Packaging	1	0.00	0.90	1.50	3.40	0.00

**More images:**

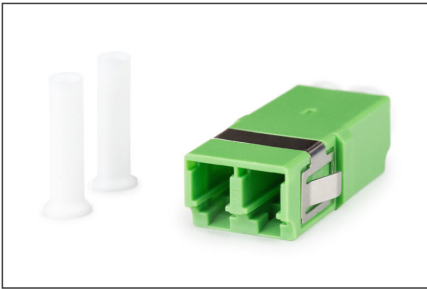

**Safety notes**

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)