

# DIGITUS mini GBIC (SFP) Module, 10Gbps, 10.0km, with DDM Feature

DN-81201  
EAN 4016032324140



**10G SFP+ Module, Singlemode, DDM LC Duplex Connector, 1310nm, up to 10km**

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Whether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

**The plug and play fiber connection**

- Mini GBIC SFP (Small Form Factor Pluggable) module
- Compatible with the following manufacturers: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon, Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik , ENTERASYS, RIVERSTONE , Unifi, Ubiquiti, ZyXEL, ZTE
- Supports DDM (Digital Diagnostic Monitoring)
- High quality and excellent reliability
- 10 Gbps Maximum Data Rate
- Compliant to IEEE802.3ae 10 Gigabit Standard
- Class 1 laser product compliant with EN 60825-1


- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant
- Hot pluggable
- Connector: 1x LC Duplex
- Wavelength: 1310nm
- Transmission Power: Minimum -8 dBm, Maximum -0,5 dBm
- Sensitivity Receiving Power: Minimum -12.5 dBm
- For a distance of up to 10,0km
- Safe fast-locking mechanism
- Operating temperature: 0 °C ~ 70 °C
- Mode: Singlemode
- Connector: LC
- Distance (km): 10
- Wavelength: 1310 nm
- DDM Support: yes
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: Universal (MSA)
- Ethernet speed: 10 Gigabit

**Package contents**

- SFP module

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	2.00	41.00	26.00	16.00	17.06
Packaging Unit Inside	1	0.10	3.00	11.50	9.00	310.50
Packaging Unit Single	1	0.10	3.00	11.50	9.00	310.50
Net single without Packaging	0	0.03	5.50	1.20	0.80	5.28

More images:

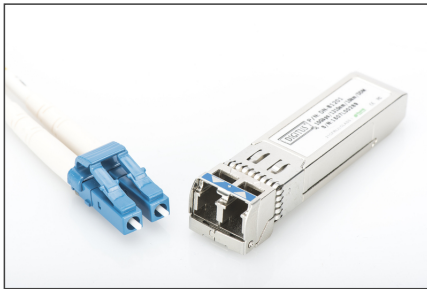

SFP Modules							
Part Number	Data Rate	Speed	Distance	Connector	Wavelength	Operating Temperature	Industrial Model
<b>Fast Ethernet</b>							
DS-4940	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4941	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4942	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4943	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4944	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4945	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4946	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4947	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4948	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4949	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4950	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4951	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4952	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4953	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4954	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4955	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4956	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4957	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4958	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4959	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4960	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4961	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4962	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4963	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4964	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4965	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4966	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4967	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4968	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4969	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4970	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4971	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4972	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4973	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4974	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4975	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4976	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4977	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4978	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4979	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4980	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4981	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4982	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4983	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4984	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4985	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4986	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4987	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4988	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4989	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4990	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4991	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4992	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4993	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4994	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4995	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4996	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4997	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓
DS-4998	1000000000	1.0 Gbps	10km	LC Duplex	1310nm	-40 to 75 °C	✓
DS-4999	1000000000	1.0 Gbps	10km	LC Duplex	1550nm	-40 to 75 °C	✓