

Planet Fast Ethernet Medienkonverter, RJ45 / SC

PL-FT-802
EAN 4711213680526



Bridge Media converter, RJ45-SC, 100 Mbps



Fiber optic converter, 100 Mbps, 10/100Base-TX - 100Base-FX MM (RJ-45 - SC), desktop, external power supply

- Transforms wire based network media to fiber optic
- High quality and excellent reliability
- 10/100Base-TX to 100Base-FX (SC,MM)
- Connectors: 1x RJ45, 1x SC duplex
- Distance: up to 2km
- Multimode dual fiber
- Automatic cable detection - auto MDI / MDI-X function
- Auto-negotiation of full- and half-duplex

- Diagnostic and monitoring LEDs for the status of power, link and act of the ports
- Link Fault Pass Through (LFP) function for easier network maintenance
- Suitable for 50/125µm and 62.5/125µm Fiber Cables
- Transmission power: minimum -22 dBm, maximum -12 dBm
- Sensitivity Receiving Power: Minimum -32 dBm
- Operating temperature: 0 to 50 °C
- Input Supply Voltage: 5V DC
- Standalone Converter with external power supply
- Dimensions (L x W x H): 97mm x 69mm x 26mm
- Industrial usage: no
- PoE injector: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	20	11.00	58.00	37.00	31.00	66.53
Packaging Unit Inside	1	0.55	28.00	14.00	7.00	2.74
Packaging Unit Single	1	0.55	28.00	14.00	7.00	2.74
Net single without Packaging	0	0.00	12.00	7.00	2.50	210.00

More images:

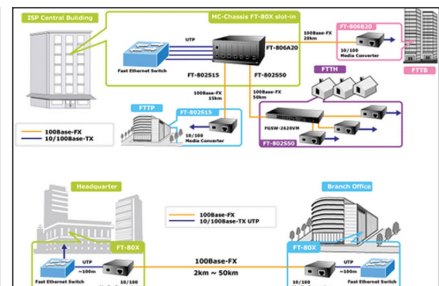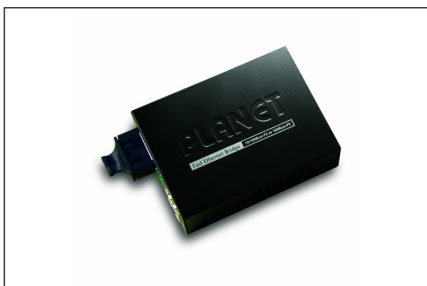



EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Gewerbepark 8
Kalsdorf bei Graz, Austria
<https://www.assmann24h.at>
office@assmann24h.at