


DIGITUS Cat.7 S/FTP installation cable, 500 m, simplex, Dca-s1a d1 a1

DK-1743-VH-5
EAN 4016032353997

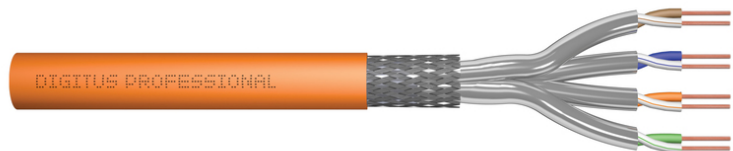

CAT 7 S-FTP installation cable, 1200 MHz Dca (EN 50575), AWG 23/1, 500 m drum, SX, orange

The Digitus Cat 7 installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-4-1, DIN EN 50173, IEC 61156-7, EN 50288-9-1. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE and POE+. The shielding structure is composed of single shielded pairs with a tinned copper braid, which ensures excellent shielding and electrical values.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare copper wire, AWG 23/1
- System(s) of assessment and verification of constancy of performance: System 3
- Insulation: SFS-PE (foamed polyethylene jacket)
- Total number of insulated conductors: 8, twisted into 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: aluminum-laminated polyester film, covers 100%
- Overall shielding: copper braiding
- Outer sheath: Dca-s2 d1 a1 acc. to EN 50575; LSZH
- Outer sheath thickness (nominal): 0.50 mm (Eca); 0.52 mm (Dca); 0.60 mm (Cca); 0.60 (B2ca)
- Color: Orange (RAL 2008)
- Mechanical properties:
- Strain relief: 135N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.

- Transport and storage temperature range: -20 °C to +60 °C
- Operating temperature range: -20 °C to +50 °C
- Installation temperature range: 0 °C to +50 °C
- Electrical properties:
- Impedance: 100±15 Ohm @ 4 - 1000 MHz; 100±25 OHM @ 100-600 MHz
- Capacitance: 45pF/m nom. at 1KHz
- Capacitance: 40 pF/m nominal @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC resistance: 95 Ohm/km max. (2% max. unbalanced resistance)
- Loop resistance: 190 Ohm/km max. (2% max. unbalanced resistance)
- Operating voltage: 72 Vdc max.
- Coupling attenuation: CA-Type 1b
- Phase delay: 450 nS/100 m max.
- Time delay: 10 nS/100 m max.
- Separation class: "d" according to EN 50174-2
- NVP: 79%
- Flame spread: EN EN 60332-1-2 (LSOH-PVC)
- Halogen-free, corrosivity: EN 60754-1/2 (LSOH)
- Smoke density EN 61034-2
- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Dca
- Length: 500 m
- Color: orange
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	27.00	55.00	55.00	35.00	0.00
Packaging Unit Inside	1	27.00	55.00	55.00	35.00	0.00
Packaging Unit Single	1	27.00	55.00	55.00	35.00	0.00
Net single without Packaging	0	27.00	54.00	54.00	34.00	0.00


More images:



DIGITUS

EN Norm	Brandenburische Prüforganisation	Leistungsstufenkategorie (GHz) Leistung & performance class	Angabe der verifizierten Werte Punkt- oder Wertebereich	Zertifizierungsschritte
B2ca	Sehr hoch Very high	1+	<ul style="list-style-type: none"> • Symmetrische • Typischer Wertebereich • Typischer Wertebereich • Typischer Wertebereich • Typischer Wertebereich 	<ul style="list-style-type: none"> • Abschreibung • Abschreibung • Abschreibung • Abschreibung • Abschreibung
C _{ca}	Hoch High	3	<ul style="list-style-type: none"> • Typischer Wertebereich • Typischer Wertebereich 	<ul style="list-style-type: none"> • Abschreibung • Abschreibung • Abschreibung
D _{ca}	Mittel Medium			
E _{ca}	Gering Low			

Brandenburische Prüforganisation: C_{ca} s1a d1 a1

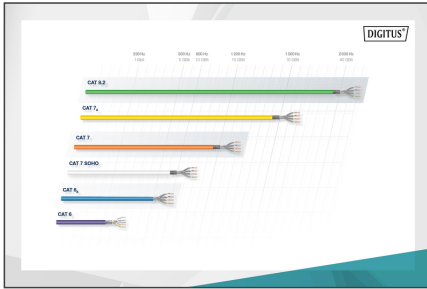

Certificate No. 09944-7-1
Zertifikat Nr. 09944-7-1
 Class 5
Klasse 5

2 Connector Permanent Link, Copper, Class 5, GDMT Type Approval
2 Connector Permanent Link, Kupfer, Klasse 5, GDMT Type Approval

Certificate No. 19433-19-1
Zertifikat Nr. 19433-19-1
 Category 7
Kategorie 7



Data Cable, Copper, Category 7, GDMT Type Approval
Datenkabel, Kupfer, Kategorie 7, GDMT Type Approval

Leitungsparameter Transmission Properties

PROG.	JE7	JE7	JE7	PRJE7	JE7	PRJE7	PL	PRJE7	PRJE7
1	2	3	3	3	3	3	3	3	3
10	10	10	10	10	10	10	10	10	10
100	100	100	100	100	100	100	100	100	100
1000	1000	1000	1000	1000	1000	1000	1000	1000	1000

Produktinformation Product Information

Produktbeschreibung	Technische Spezifikationen Physical Properties
Produktbeschreibung: CAT 7 S/FTP Installation Cable, 500m, Simplex, D _{ca}	Technische Spezifikationen: AWG 23/1, 1200 MHz, 10 Gbit Ethernet, CAT 7, LSZH, D _{ca} CPR class

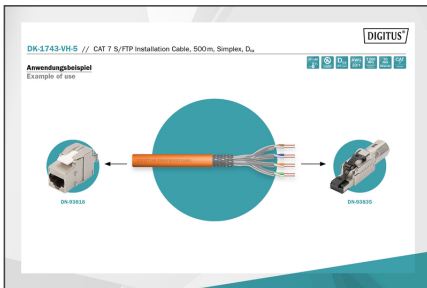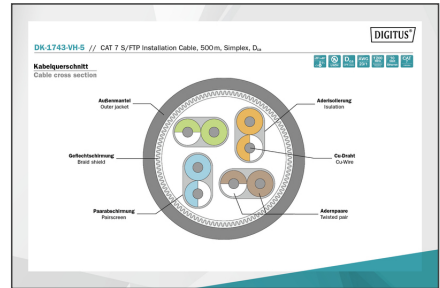

CAT 7 S/FTP Installation Cable, 500 m, Simplex, D_{ca}

AWG 23/1, 1200 MHz, 10 Gbit Ethernet, CAT 7, LSZH, D_{ca} CPR class

