

DIGITUS DisplayPort Adapter / Converter

AK-340403-001-S
EAN 4016032289289



AK-340403-001-S, kabel DP-VGA 0 M/F 0,15 met M/F, 0.15m,w/interlock, DP 1.2 compatible, CE, bl

This adapter / converter suits for example ideal to connect a notebook or computer with DP interface to a VGA monitor, beamer, LCD/TFT monitor with a VGA monitor cable.


Use your existing VGA monitor with a DisplayPort device without loss of quality

- Supports up to 1080p with 60Hz
- Supports monitor resolutions of up to 1920 x 1200p
- Supported transmission modes: RBR, HBR, HBR2
- Maximal bandwidth: 21,6 Gbps
- HBR-Version/transfer mode: HBR2 (5,40 Gbit/s per lane)
- HDCP-Version: HDCP 1.3
- Ambalaža: Polybag
- Asortiman: DisplayPort kabeli

- AWG: 28
- Blokiranje: Zatvarač na kopču
- DisplayPort standard: DisplayPort 1.2
- Feritni filter: nema
- HDTV-norma: Ultra HD 4K
- Kabel u boji: crni
- Kapice: ukalupljeno
- Konektor 1: DP, utikač
- Konektor 2: HD15, priključak
- Konektor u boji: crni
- Materijal žice: CU
- Površina konektora: poniklano
- Duljina: 0.15 m
- AOC - aktivni optički kabel: Ne
- oklop: dvostruki oklop

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	200	8.00	38.10	30.20	31.10	35,784.30
Packaging Unit Inside	10	0.40	40.60	40.60	8.10	13,351.70
Packaging Unit Single	1	0.04	20.00	15.00	1.62	486.00
Net single without Packaging	0	0.03	24.50	4.50	1.50	165.38

More images:

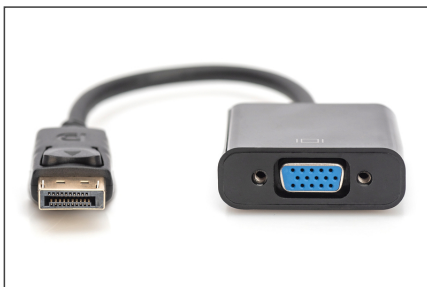



Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com