


DIGITUS Keystone utični modul Kat. 6A, oklopljeni, ožičenje bez alata

DN-93615
EAN 4016032293767

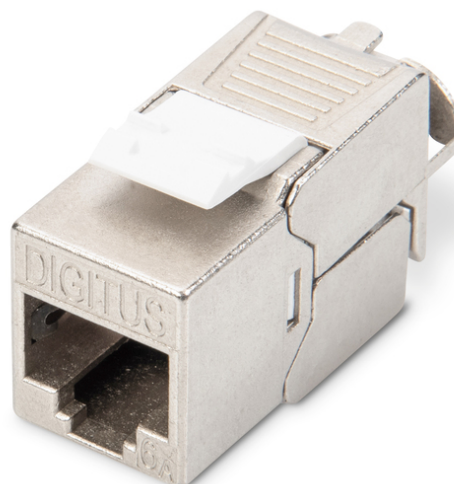

DN-93615 Keystone modul Digitus, c6a, STP-D tool free connection

Artikl DN-93615 iz DIGITUS® ponude je oklopljeni keystone utični modul Kat. 6A za ožičenje bez alata koji osigurava najbolje moguće performanse i kvalitetu linka Vaše mreže. Kompaktan dizajn omogućava ugradnju 24 komada na 1U prespojnim panelima 483 mm (19"). Sukladan je Kategoriji 6A / 10GBase-T Channel, ANSI/EIA/TIA 568C.2.1 :2002, ISO/IEC 11801:2002.

Quick and safe wire terminations without any special tool

- Category 6A 10GBase-T, 500 MHz
- ISO/IEC 11801 3rd Edition, EN 50173-1
- Suitable for PoE/PoE+/4PPoE (IEEE 802.3af, 802.3at, 802.3bt)
- Suitable for modular patch panel and modular wall outlet installation.
- RJ45-Jack, 8P8C
- Cable installation via insulation-displacement connectors, color coded in accordance with EIA/TIA 568 A & B
- Cable grip and cable fixation using intelligent cable manager
- Tool-free mounting connection
- 360° shield contact

- Case material: Zinc die-cast – nickel-plated
- Contact material: Phosphor bronze
- Contact coating: Nickel, gold-plated 0.5 μ
- Insertion force: Max. 30N (as per IEC 60603-7-51)
- Holding force: 7.7 kg between jack and plug
- Operating temperature range: -20 °C to +70 °C (ISO/IEC 11801, ANSI/TIA 568 C.2)
- Mating cycles: ≥ 750 (ISO/IEC 11801, IEC 60603-7-51)
- Copper cable diameter: AWG (26/7 – 22/1), stranded and solid wire
- Tested with AWG 22/1 solid installation cable
- (DIGITUS® DK-174X-A-VH-X; AWG 22/1 cat. 7A installation cable)
- Dielectric strength: 1000 VDC (contact/contact), 1500 VDC (contact/ground)
- Tool-free installation using LSA insulation-displacement connectors color coded in accordance with EIA/TIA 568 A & B
- Intelligent cable manager (resealable)
- Dimensions (HxWxD): 21.0 x 14.5 x 34.5 mm
- Weight: 19.5 g
- Težina: 22 g

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
| Packaging Unit Carton | 250 | 6.80 | 53.00 | 31.00 | 23.00 | 37.79 |
| Packaging Unit Inside | 25 | 0.68 | 20.00 | 14.00 | 10.50 | 2.94 |
| Packaging Unit Single | 1 | 0.03 | 2.00 | 8.00 | 11.00 | 176.00 |
| Net single without Packaging | 0 | 0.02 | 3.70 | 1.50 | 10.00 | 55.50 |

More images:

