


# DIGITUS USB 2.0 Connection Cable, Type A to Mini B

**DB-300130-010-S**  
**EAN 4016032323235**

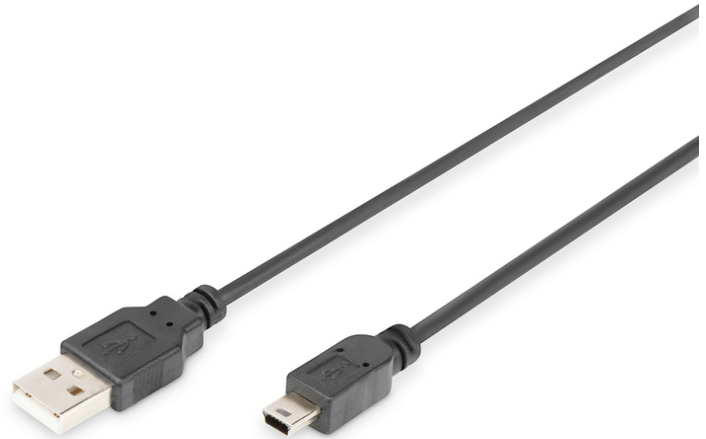

**USB 2.0 connection cable, type A - mini B (5pin) M/M, 1.0m, USB 2.0 conform,**

For connection of external USB end devices with Mini B (5-pin) jack, e.g. digital cameras, action camera, external hard drives, gaming consoles and navigation devices or printers to the USB host (e.g. PC, notebook or USB hub). Transmission speed of up to 480 Mbps (High-Speed). Since the DIGITUS® USB cables are compatible with all common devices and manufacturers, this cable is suitable for universal use. The cable length of 1 m ensures convenient use.

**The USB cables from DIGITUS® are compatible with devices such as digital cameras, action cameras, external hard drives, gaming consoles and navigation devices and printers with Mini USB connection.**

- Transmission speed of up to 480 Mbps (High-Speed)

**Attributes**



- Asortiman: USB kabele
- Kabel u boji: crni
- Kapice: ukalupljeno
- Konektor 1: USB A, utikač
- Konektor 2: Mini USB B, 5-polni, utikač
- Konektor u boji: crni
- Površina konektora: poniklano
- USB sukladnost: USB 2,0
- Duljina: 1 m

**Package contents**

- 1 x USB 2.0 Connection Cable, Type A to Mini B

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	72	3.50	49.50	29.00	33.50	48,089.20
Packaging Unit Inside	12	0.58	27.00	25.00	16.00	10.80
Packaging Unit Single	1	0.05	2.30	7.50	23.50	405.38
Net single without Packaging	0	0.03	1.50	6.00	20.00	180.00

**More images:**

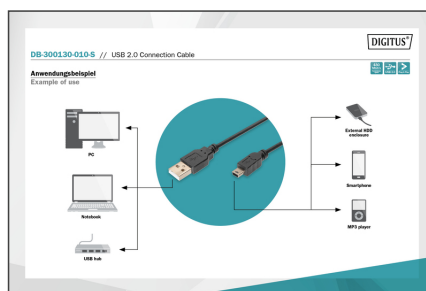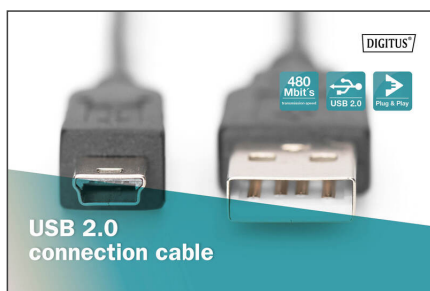

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)