

DIGITUS Prespojni kabel Kat.6 S/FTP

DK-1644-A-030
EAN 4016032327424



AMCSSP c6a 60030 PATCH KABEL 3m SIVI c6a LSOH AWG 26/7, length 3 m, color grey

Novi DIGITUS® prespojni kabeli vraćaju se na tržište sa unaprijeđenim mikroutikačem. Prespojni kabeli opremljeni su s redizajniranim mikroutikačem s pregibnicom sa zaštitom od mehaničkog oštećenja. Po boji konektora određuje se kategorija kabela: Plavi utikač za Kat.5e, crveni utikač za Kat.6 i žuti za Kat. 6A. U ponudi se nalaze različite boje i dužine kako bi zadovoljili sve zahtjeve klijenata. Za dodatne informacije molimo pogledajte naš katalog s ponudom prespojnih kabela!

Vrhunsku kvalitetu Vaše mreže osigurava oprema proizvedena sukladno najnovijim standardima.

- 2x RJ45 (8P8C) mikroutikača
- Pregibnica sa zaštitom
- Oznaka dužine na pregibnici



- Vodič: Bakar (Cu)

Attributes

- Ambalaža: DIGITUS Polybag
- Asortiman: Patch kabeli s upređenim paricama
- Konektor 1: Modularni RJ45 (8/8) utikač
- Konektor 2: Modularni RJ45 (8/8) utikač
- Konfiguracija: 1:1
- Kategorija: CAT 6A
- Oklop: S-FTP, oklop parova u metalnoj foliji i pletenica
- Duljina: 3 m
- Boja: sivi
- Kapica: LSOH
- Struktura: 4 x 2 AWG 26/7, upletena parica
- Tanki verzija: Ne
- Flat Version: Ne

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	80	9.60	46.00	33.00	28.00	42.50
Packaging Unit Inside	1	0.12	30.00	36.00	10.00	10.80
Packaging Unit Single	1	0.12	1.80	17.00	25.00	765.00
Net single without Packaging	0	0.10	300.00	1.17	1.27	445.77

More images:

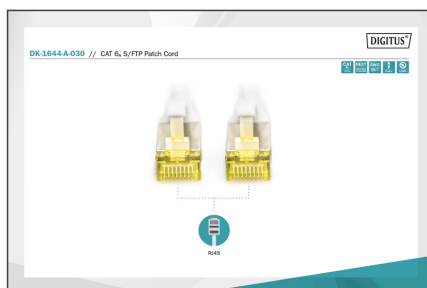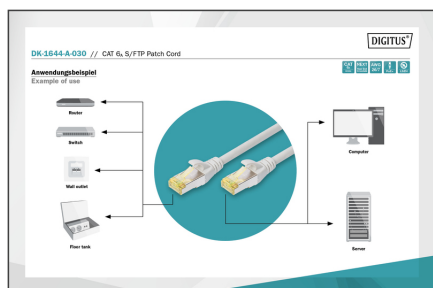

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com